

FALL PROTECTION USING SLIDER FALL ARRESTOR

Are You ATTACHED?

ALL THE TIME !

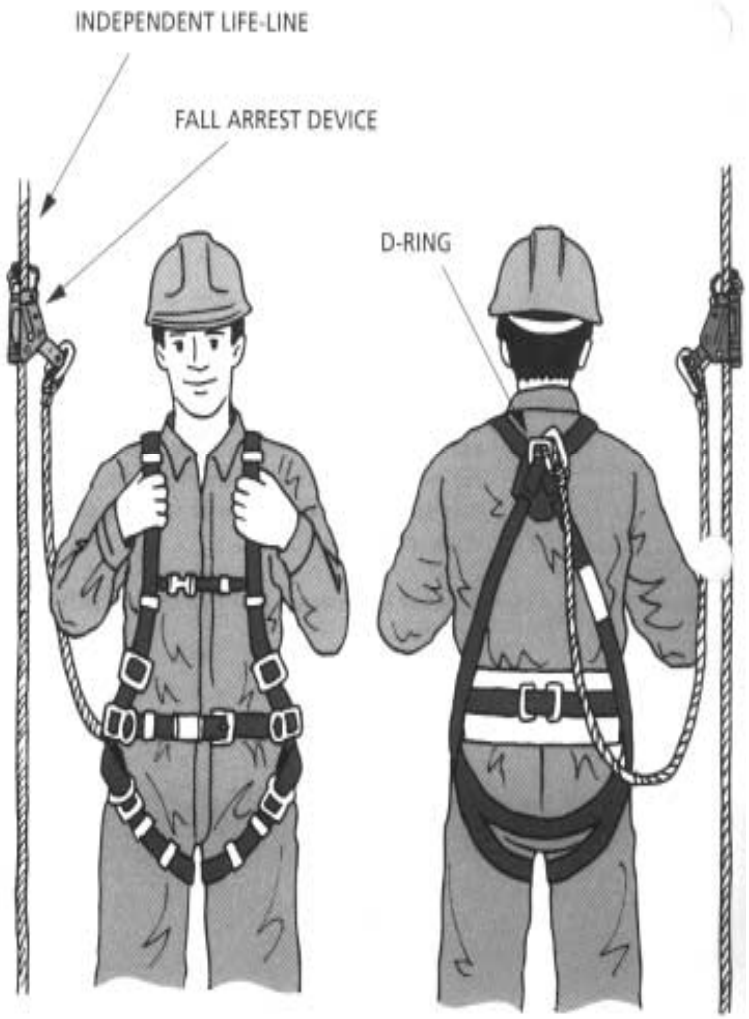

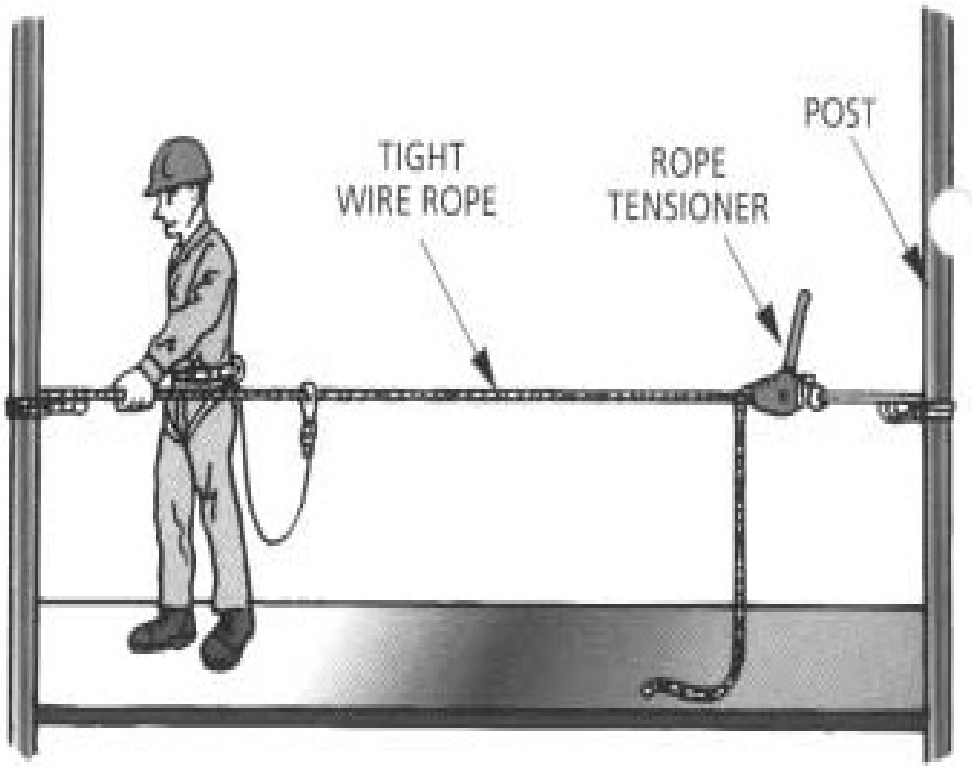

SAFETY FIRST

SLIDER FALL ARRESTER

Slider fall arrestor device will catch hold the person attached to it connected to a PP rope which is anchored on top on permanent structure. The PP rope is freely falling behind the painter/operative for any external activity provides free movement of the painter/worker. Without this PPE if a painter/worker works on a scaffold is always worried about safety and his one hand will be always engaged for grip. The quality and productivity can be increased if the worker is provided with a stable platform and safe mobility up and down and sides to side. This PPE system is a combination of three items 1 Full body safety harness 2. Slider fall arrestor device, 3. PP rope (According to the make of slider fall arrester the size of PP rope varies from 12 to 16 mm thickness). The length of the PP rope is 50 Mtr which should not have cut at any reason and not supposed to use a reduced size in length. Both the ends of the pp rope should have properly terminated. One end on top on permanent structure using strong u bolt anchored to permanent structure. The bottom end with strong greater knot so that the slider fall arrestor should not reel out. In case if the work height is less that 50 meter, a strong knot need to be provided at 48 meter from the top so that the person attached should not hit the ground in case the system fails an any reason. A complete set is required for each individual. Multiple connections to a single rope is dangerous hence not allowed. The external activities must have a demonstration using this system under the supervision of concerned EHS in charge prior to start of activity. External activities need to follow work permit system.