
GEOCON
Foundation Solutions

Geocon International Pvt. Ltd.
45 Casa Luna Bldg.1st Floor
L. J. Road No.1, Mahim (W)
Mumbai 400 016, India
T: +91 22 24448985
F: +91 22 24445370
E: geocon5@hotmail.com
W: www.geoconinternational.com

GEOTECHNICAL INVESTIGATION REPORT
PROPOSED HIGH RISE BUILDINGS "FENELIA & EUCALYPITA"
ACME OZONE, THANE (W)

Submitted to,
ACME HOUSING INDIA PVT. LTD.

Submitted By,
GEOCON INTERNATIONAL PVT. LTD.



GEOTECHNICAL INVESTIGATION REPORT
PROPOSED HIGH RISE BUILDINGS "FENELIA & EUCALYPITA"
AT ACME OZONE, THANE (W)
FOR ACME HOUSING INDIA PVT. LTD.

Table of Contents

Item		Page
1.0	INTRODUCTION	2
1.1	Project Description	2
1.2	Site Location	3
1.3	Area Geology	4
2.0	EXPLORATION PROGRAM	5
2.1	Exploration Scope	5
2.2	Subsurface Conditions	5
2.3	Ground Water Table	
3.0	FOUNDATION RECOMMENDATIONS	6
3.1	Soil Structure Interaction for Zoned Spring Constants	7
3.2	Basement Consideration	7
3.3	Lateral Earth Pressures	8
3.4	Foundation Excavation Observations	9
3.5	Foundation Protection	9
4.0	FIELD EXPLORATION PROCEDURES	10
	References/Calculations	

ANNEXURES
- Location Plan of Boreholes
- Borehole Logs
- Subsurface Profile
- Laboratory Test Rsults
- Foundation Layout
- Plaxis Analysis
- Pressure & Settlement Contours
- Hydro-static Uplift Calculations
- Excavation Shoring Scheme
- Core Box Photographs

GEOTECHNICAL INVESTIGATION REPORT
PROPOSED HIGH RISE BUILDINGS "FENELIA & EUCALYPITA"
AT ACME OZONE, THANE (W)
FOR ACME HOUSING INDIA PVT. LTD.

1.0 INTRODUCTION

Acme Housing India Pvt. Ltd. plans construction of High Rise buildings (Fenelia& Eucalypita) in Thane (W). The proposed high-rise buildings will consist of Double Basement + 3 Podiums + Stilt + Ground + 36 Upper Floors. The work of geotechnical investigation was awarded to Shree Samarth Krupa Geotechnics. The field work for the geotechnical investigation was completed by Shree Samarth Krupa Geotechnics in June 2019. This report prepared by Geocon International Pvt. Ltd. presents results of the geotechnical investigation along with foundation recommendations for proposed buildings.

1.1 Project Description


The building configurations, building height and current status of buildings are given in Table A below.

TABLE A
PROJECT DESCRIPTION

Sr. Nos.	Building Name	Building Configuration	Height of proposed building	Current status on site
1	Fennila	2Basments + 1st Podium(pt)/ Ground part (shop)+2nd Podium (part) / Mezzanine part (shop)+ 3rd podium +Stilt + 1ST to 36th Part floor	121.77m	Work has not started yet.
2	Eucalyptia	2Basments + 1st Podium +2nd Podium + 3rd podium +Stilt + 1ST to 36th Part floor		

1.2 Site Location

The proposed site is located in Thane. The site location is illustrated in sketch 1 below:

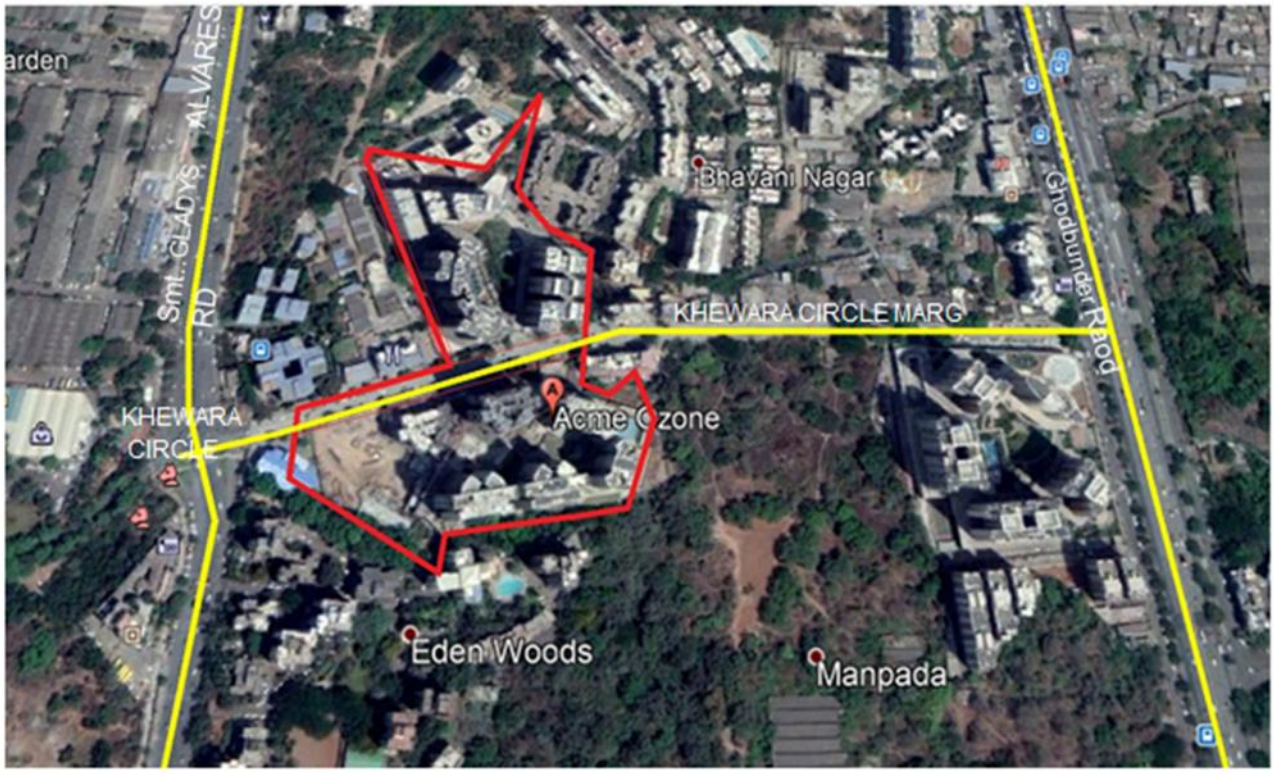

Sketch 1 – Google Image of Site

1.3 Area Geology

As per IS1893-1984; the area of the site has been classified as Volcanic rocks and minor basic intrusives. The general area of the project consists mostly of nearly horizontal dispersed lava flows of Deccan Trap Basaltic Formation of Cretaceous to Eocene age. The Igneous rocks are generally of horizontal deposition. The inclination of the rock layers near the Mumbai region range between 5 degrees to 15 degrees with the horizontal.

As per IS 1893, the site falls under Seismic Zone III, which corresponds to a Modified Mercalli Intensity of VII. The basic horizontal seismic coefficient corresponding to this zone is 0.16g (Where g is the gravitational acceleration).

2.0 EXPLORATION PROGRAM

2.1 Exploration Scope

Nine boreholes (NBH-1 to NBH-9) were completed for the project as illustrated on the Borehole Location Plan in the Annexure. Borehole termination depths are summarized in Table B below.

TABLE B
BOREHOLE TERMINATION DEPTHS

Borehole Number	Borehole Location	Ground Reduced Levels	Borehole Termination Depths
NBH-01	Fenelia Building	+97.9m	28.0m
NBH-02		+100.5m	28.0m
NBH-03		+99.5m	28.0m
NBH-03	Eucalypita Building	+99.5m	28.0m
NBH-04		+103.1m	28.0m
NBH-05	Non-Tower Area	+99.3m	26.0m
NBH-06		+100.9m	20.0m
NBH-07		+103.2m	19.0m
NBH-08		+103.2m	22.0m
NBH-09		+104.0m	20.0m

2.2 Subsurface Conditions

Subsurface profile at this site generally consists of residual soils overlying completely weathered rock underlain by basalt bedrock. Encountered soil/rock layers are described below;

LAYER I: RESIDUAL SOILS

Residual soils, consisting mostly of brownish / yellowish clay and sand were encountered at ground surface in the boreholes. Based on Standard Penetration Tests (SPT) conducted within this layer, consistency of cohesive soils (clay) was medium stiff to stiff and the relative density of cohesion less soils (sand) was loose to medium dense. The lower boundary of this layer was encountered at depths of 2.0m to 8.0m below ground.

LAYER II: COMPLETELY WEATHERED ROCK

Completely weathered rock was encountered at depths of 2.0m to 8.0m below ground surface in few boreholes. This layer is formed by the complete in-place disintegration of parent bedrock material, but still partially retains the original rock mass structure. SPT tests conducted in this layer encountered refusals. Core recoveries were typically less than 35%. The lower boundary of this layer was encountered at depths of 6.0m to 15.0m below ground surface.

LAYER III: HARD BASALT BEDROCK

Grey basalt bedrock was encountered at depths of 2.0m to 15.0m below ground surface in the boreholes. The bedrock was moderately weathered to sound, generally improving with depth. Core Recoveries in the bedrock layer varied between 37% and 99%, and Rock Quality Designations (RQDs) varied between Nil and 97%. The boreholes were terminated in this layer at depths of 19.0m to 28.0m below ground surface.

2.3 Ground Water Table

Groundwater accumulation in boreholes was monitored during and after completion of drilling activities. Groundwater was observed in boreholes at depths of 1.0m to 8.0m below ground level. Seasonal and annual fluctuations in ground water levels can be expected.

3.0 FOUNDATION RECOMMENDATIONS

Hard rock is encountered at depths of typically 2.0m to 6.0m below ground within tower area. Spread/Raft foundations for proposed buildings with double basement can be supported on this hard bedrock or PCC extended to hard rock. Foundation recommendations are summarized in Table B given below.

TABLE B
FOUNDATION RECOMMENDATIONS

Borehole Number	Borehole Location	Ground Reduced Levels	Depths To CWR	Depths To Hard Rock	Net Allowable Bearing Capacity
NBH-01	Fenelia Building	+97.9m	4.5m (RL +93.4m)	4.5m (RL +93.4m)	300 t/m^2 on HR
NBH-02		+100.5m	2.0m (RL +98.5m)	2.0m (RL +98.5m)	
NBH-03		+99.5m	5.0m (RL +94.5m)	5.0m (RL +94.5m)	
NBH-03	Eucalypita Building	+99.5m	5.0m (RL +94.5m)	5.0m (RL +94.5m)	
NBH-04		+103.1m	2.5m (RL +100.6m)	6.0m (RL +97.1m)	
NBH-05	Non Tower Area	+99.3m	5.5m (RL +93.8m)	15.0m (RL +84.3m)	50 t/m^2 on CWR or 100 t/m^2 on HR
NBH-06		+100.9m	2.0m (RL +98.9m)	2.0m (RL +98.9m)	
NBH-07		+103.2m	7.0m (RL +96.2m)	9.0m (RL +94.2m)	
NBH-08		+103.2m	7.0m (RL +96.2m)	13.0m (RL +90.2m)	
NBH-09		+104.0m	8.0m (RL +96.0m)	15.0m (RL +89m)	

CWR – Completely Weathered Rock
HR – Hard Rock

Wherever hard rock is encountered at deeper depths (Near Borehole NPBH-04), foundation should be rest on deeper depths (up to hard rock where complete refusals obtained) and same should be backfilled with PCC.

Maximum settlement of foundations will be less than 12mm. Zoned modulus of subgrade reaction can be utilized for design of raft foundations as given in Annexure (Plaxis Analysis).

3.1 Soil Structure Interaction for Zoned Spring Constants

Soil structure interaction using Finite Element Methods was completed for design of raft foundation. Software "Plaxis 3D Foundation" was utilized for analysis.

Software input parameters are summarized below.

1) Column locations and column loads obtained from structural consultants.
2) Raft Thickness = 2.0m
3) Raft E Value = 3.0×10^7 KN/m^2
4) Rock E Value = 1,70,000 KN/m^2 (Ref -1)

Zoned spring constants for structural design were obtained from Plaxis Software as the ratio of pressure under Raft divided by corresponding Settlement. Zoned spring constants are included in Annexure.

The above spring constants were then input by structural consultants in structural engineering software (SAFE) for structural design of raft foundations.

3.2 Basement Consideration

Basement floors and walls should be adequately water-proofed. Adequate uplift resistance in the form of dead weight or rock anchors should be provided. An allowable grout/rock bond stress of 40 t/m^2 can be utilized for design of rock anchors for tower area and 20 t/m^2 for non-tower area. Maximum groundwater table for uplift design should be taken at ground surface.

3.3 Lateral Earth Pressures

Basement walls and pile shoring walls, if any, will be subjected to lateral earth pressures. A soil submerged unit weight (r_{sub}) and coefficient of active lateral earth pressure (k_a) of 0.8 t/m^3 and 0.5, respectively, should be utilized for design of basement walls installed without adjacent pile shoring walls. Hydrostatic pressures and surcharge pressures, if any, should also be considered.

3.4 Foundation Excavation Observations

We hereby undertake to confirm founding strata following completion of excavation and prior to concreting, upon intimation by client/owner.

3.5 Foundation Protection

Results of chemical analysis on soil and groundwater samples enclosed in the Annexure, indicate that the site falls under Class 1 for sulphate concentrations and chloride concentrations (As per IS456 and as per CIRIA Sp. Publication No. 31). A 'Moderate' Exposure Condition was assigned to this site. Therefore following precautions are recommended to protect subsurface concrete and reinforcement.

Type of Cement:	OPC or PPC
Minimum Grade of Reinforced Concrete:	M25
Minimum Cement Content for Spread Foundation:	300 kg/m^3
Maximum Water Cement Ratio:	0.50
Minimum Cover to Reinforcement:	50mm

4.0 FIELD EXPLORATION PROCEDURES

The sub-surface investigation was completed generally as per IS: 1892-1979. The field investigation was carried out using rotary rigs (Calyx, 8 HP, Engine). Casing was used to support sides of borehole until sufficiently stiff strata was encountered. Standard Penetration Tests (i.e. SPT) were carried out at every 1.5m vertical interval up to bedrock, in accordance with IS 2131-1981. Using this procedure, a 5 cm outside diameter split-barrel sampler is driven into the soil by 63.5 kg. weight falling through 75 cm height. After an initial set of 15cm, the number of blows required to drive the sampler an additional 30 cm, is known as the “penetration resistance” or “N value”.

After SPT refusal was obtained, NX sized rock coring was done in maximum of 1.5m runs, using diamond bit and double tube core barrel. Percent Rock Core Recovery and percent Rock Quality Designation (%RQD) were determined. % RQD = 100 x Sum of length of rock pieces in cms, each having lengths greater than 10cms/Total length of core run in cms.

Sincerely,

GEOCON INTERNATIONAL PVT. LTD.



_____

Jaydeep Wagh
B.E., M.S., P.E. (Geotechnical)

REFERENCES

1) Foundation Analysis and Design, J.E. Bowles, McGraw Hill Publication, 5th Edition, 1996.

2) Canadian Foundation Engineering Manual.

3) Soil Mechanics in Engineering Practice, 2nd Edition, Terzaghi K. and Peck R. B., John Willey and Sons, 1967.

4) Foundation Design Manual, N. V. Nayak, 5th Edition, 1996.

5) IS:6403-1981, Code of Practice for Design and Construction of Shallow Foundations on Soils.

6) IS 12070: 1987, Code of Practice for Design and Construction of Shallow Foundations on Rocks

SAMPLE CALCULATION OF ALLOWABLE BEARING CAPACITY FOR FOUNDATIONS ON HARD BEDROCK (FOR TOWER AREA – BH-01 to BH-04)

_____ GL +0.0m
Layer I, Residual Soils
_____-2.0m to 5.0m
Layer II, Completely Weathered Rock
_____ -2.0m to -6.0m
Layer III, Hard Basalt Bedrock

Allowable bearing capacity = (Nj) x Qu (Ref. 6, Clause 6.2, pg. 7)

Where,
Nj = Joint condition factor = 0.1 to 0.4 (Ref. 6, Table 4, clause 6.2, pg. 9)
Assumed as 0.1 for hard rock

Qu = Rock Compressive strength = minimum of 3270 t/m^2 (Annexure, Laboratory Test Result)

Therefore, Allowable Bearing Capacity = 0.1 x 3270 = 327 t/m^2

Restricted to 300 t/m^2

B) CALCULATION OF SETTLEMENTS OF SPREAD FOUNDATIONS (5m x 5m) EXERTING PRESSURE OF 300 t/m^2:

$$\text{Settlement} = S = q_0 B' \frac{1-\mu^2}{E_s} m I_s I_f$$

Where,
q_0 = Footing Pressure = 300 t/m^2
B' = B/2 (Where B is the width of pressure distribution
μ = Poisson's ratio = 0.25
E = Modulus of Elasticity
I_s = Influence Factor (Obtained from Table 5-2, Reference No. 1)
I_f = Depth Factor (Obtained from Figure 5-7, Reference No. 1)
m = 4 for center of footing

E value for Basalt bedrock = 17,00,000 t/m^2 (Reference No. 1)
Using 1/10th of this value, E = 1,70,000 t/m^2

L' =5/2 =2.5, B' = 5/2 = 2.5, H=10m, and D=10.5m
Therefore, M=L/B=1; and N=H/B'=4 and D/B=4.2
Corresponding, I_s = 0.43, Conservative I_f = 1.0 (From Table 5-2, Reference 1)

Settlement of Layer = $S_1 = 300x2.5x\frac{1-0.25^2}{1{,}70{,}000}x4x0.43x1.0$ = 0.007m = 7mm

SAMPLE CALCULATION OF ALLOWABLE BEARING CAPACITY FOR FOUNDATIONS ON COMPLETELY WEATHERED ROCK (For NON TOWER AREA)

_____ GL +0.0m
Layer I, Residual Soils
_____-2.0m to 8.0m
Layer II, Completely Weathered Rock
_____ -2.0m to -13.0m
Layer III, Hard Basalt Bedrock

(Assuming completely weathered rock to be a very dense granular soil.)

Net Ultimate Bearing Capacity = $q_u = cNc\ s_c + q\ (N_q - 1)\ s_q + 0.5\ B\ \gamma N\gamma\ s_\gamma$ (Refn. 5, Table 4-1)

Where,

q = Overburden Pressure (i.e. submerged unit weight x depth of foundation)
c = Cohesion
B = Minimum Width of foundation = 1m
γ' = submerged unit weight of soil = 0.80
N_c, N_q, N_γ = Terzaghi's Bearing capacity factors
Sc, sq, s_γ = Shape factors = Conservatively assumed as 1, 1, and 0.6
D = Minimum depth of Footing below basement top = 1.5m

Minimum SPT N value obtained in boreholes = 50
Corresponding friction angle = 42^o (Reference No. 5)
Corresponding Nc=75, Nq=92, N_γ=174 (Reference 5, IS:6403-1981);

Substituting these values in the above equation;
q ultimate =q_u =[0x75x1]+[1.5x0.8x(92-1)x1]+[0.5x1x0.8x174x0.6]= 0+109+41 = 150 t/m^2
q safe = q_u/F.S. = 150/3 = 50 t/m^2

CALCULATION OF SETTLEMENTS OF FOUNDATIONS (3m x 3m) EXERTING PRESSURE OF 50 t/m^2:

From Reference No. 1:

$$\text{Settlement} = S = q_0 B' \frac{1 - «^2}{E_s} m I_s I_f$$


Where,
q_0 = Footing Pressure = 50 t/m^2
B' = B/2 (Where B is the width of pressure distribution
μ = Poisson's ratio = 0.3
E = Modulus of Elasticity
I_s = Influence Factor (Obtained from Table 5-2, Reference No. 1)
I_f = Depth Factor (Obtained from Figure 5-7, Reference No. 1)
m = 4 for center of footing

Very conservatively assuming completely weathered rock to be over-consolidated sand:
E value for over-consolidated sand = 105(N)+4000 (Reference No. 1)
Therefore, for a SPT N value of 50, E=9250 t/m^2

L' = 3/2 =1.5, B' = 3/2 = 1.5, H=6m, and D=10.5m
Therefore, M=L/B=1; and N=H/B'=4, and D/B=3.5
Corresponding, I_s = 0.43, Conservative I_f = 1 (From Table 5-2, Reference 1)

Settlement of Layer = S_1 = $50x1.5x\frac{1-0.3^2}{9250}x4x0.51x1$ = 0.012m = 12mm

BOREHOLE LOCATION MAP

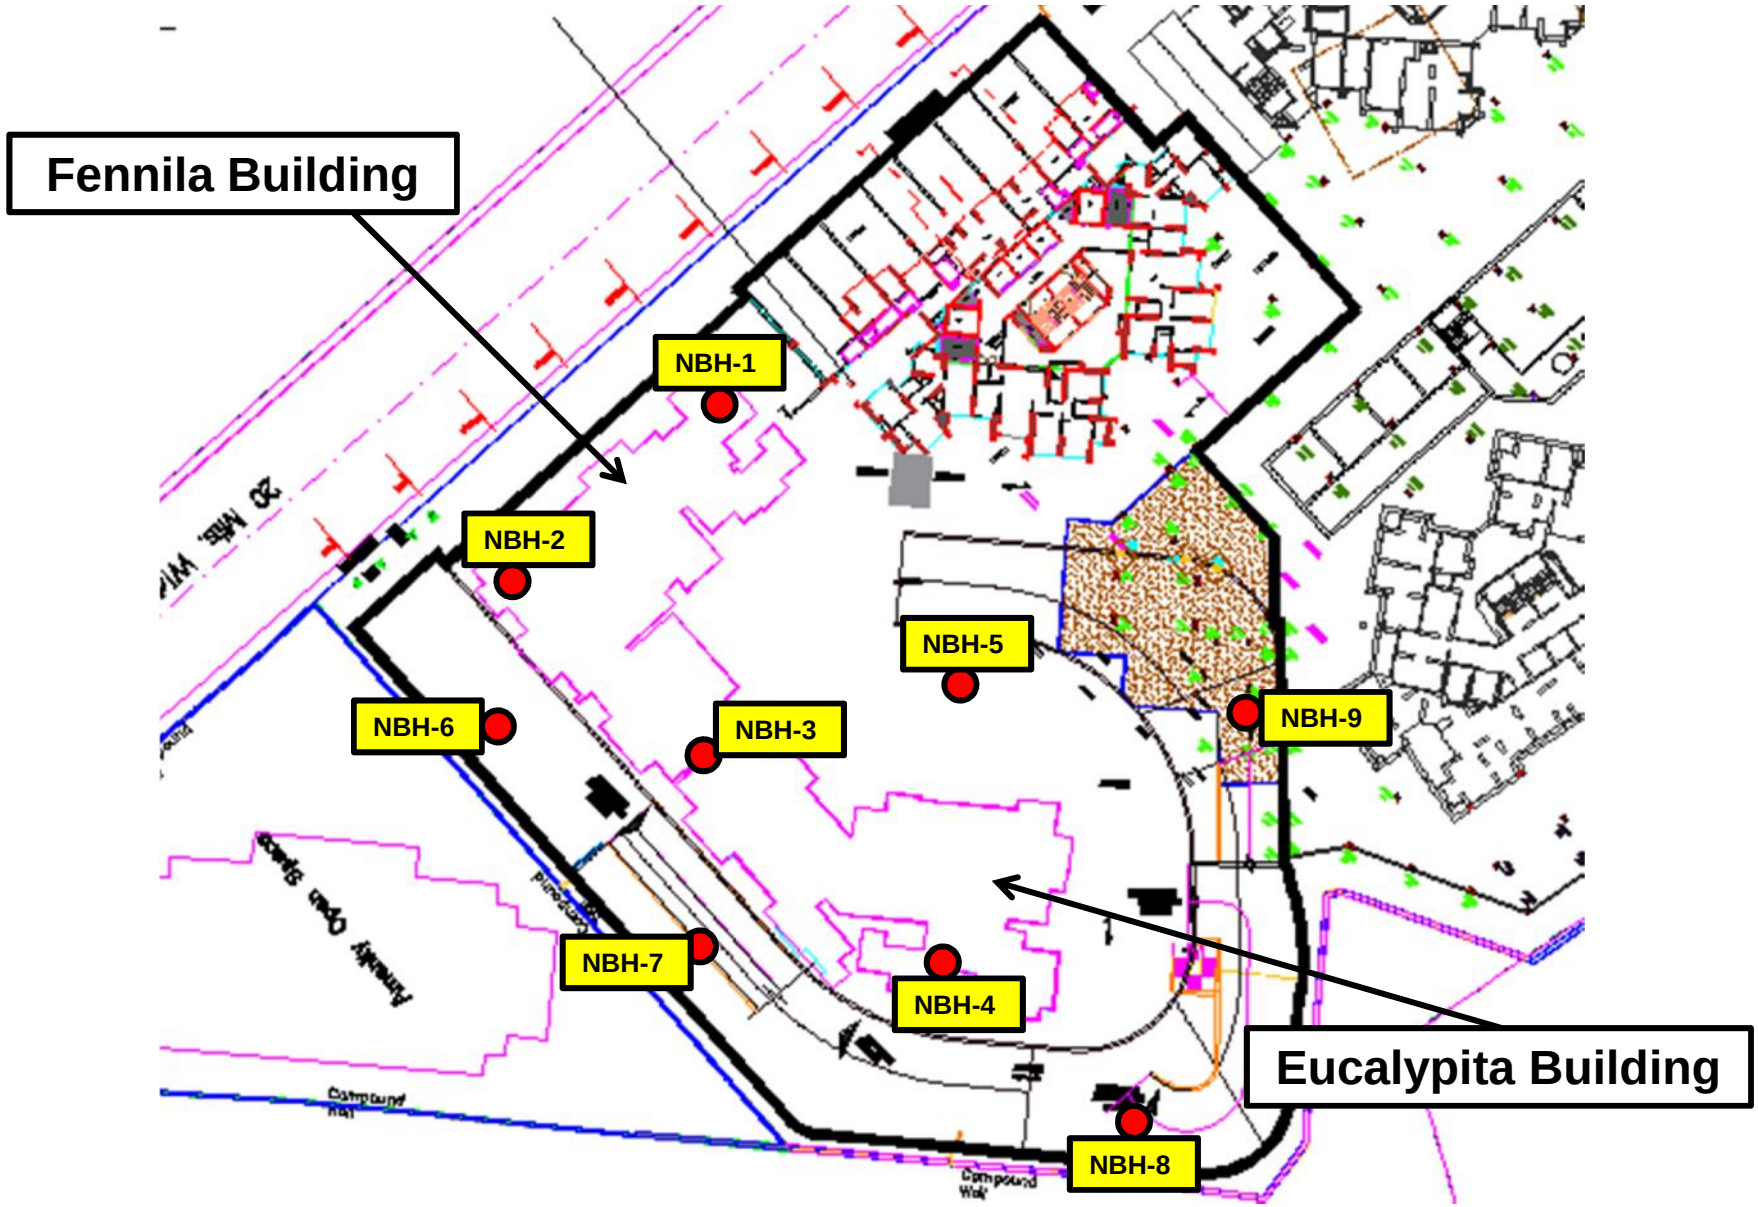

CLIENT	: ACME HOUSING INDIA PVT. LTD.		BOREHOLE NO. :NBH-01 SHEET NO. : 1 of 3
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)		
LOCATION	: --		
CO-ORDINATES	: --	DATE	: 09/06/2019 TO 20/06/2019
GROUND R. L.	: 97.9m	METHOD	: ROTARY DRILLING
GROUND W. T.	: 3.00m	CASING	: 4.00m

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	TYPE OF SAMPLE	BLOWS/15cm 15	15	15	15	SPT N	C R %	RQD %
1.00	100 mm		Brownish Sand & Gravel with Boulders	1.50									
2.00			Brownish Weathered Rock										
3.00	NX			3.00									
				3.60		SPT 1	06	09	11	16	20		
4.00				4.50									
5.00				5.00								72	72
6.00			Grayish BASALT	6.00								66	58
7.00				7.00								63	63
8.00				8.00								90	90
9.00				9.00								98	92
10.00				10.00								96	96

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-01
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 2 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
				10.00									
11.00	NX			11.00								73	73
12.00			Grayish BASALT	12.00								94	94
13.00				13.00								96	88
14.00				14.00								91	91
15.00				15.00								79	70
16.00				16.00								99	82
			Grayish to Reddish BASALT										
17.00				17.00								70	70
18.00				18.00								86	86
19.00				19.00								87	87
20.00				20.00								76	71
21.00				21.00								82	82

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-0
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 3 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
				21.00									
22.00	NX			22.00								77	41
				23.00								80	80
23.00			Grayish BASALT										
				24.00								76	76
24.00													
			Grayish to Reddish BASALT	25.00								83	78
25.00													
				26.00								80	61
26.00													
			Grayish BASALT	27.00								79	68
27.00													
				28.00								97	97
28.00													
29.00													
30.00													
31.00													
32.00													

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : BOREHOLE IS TERMINATED AT 28.00 MTR BELOW EGL.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: **ACME HOUSING INDIA PVT. LTD.**	BOREHOLE NO. :NBH-02	
PROJECT	: **PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)**	SHEET NO.	: 1 of 3
LOCATION	: --		
CO-ORDINATES	: --	**DATE**	: **12/06/2019 TO 24/06/2019**
GROUND R. L.	: **100.52m**	**METHOD**	: **ROTARY DRILLING**
GROUND W. T.	: **2.00m**	**CASING**	: **1.50m**

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	TYPE OF SAMPLE	BLOWS/15cm 15	15	15	15	SPT N	C R %	RQD %
1.00	100 mm		Brownish Sand & Gravel with Boulders	1.00									
2.00			Boulders	2.00									
				2.06		SPT 1	52	--	--	--	R		
3.00	NX			3.00								46	31
4.00				4.00								75	40
5.00				5.00								74	74
6.00			Grayish BASALT	6.00								54	27
7.00				7.00								57	57
8.00				8.00								65	31
9.00				9.00								84	77
10.00				10.00								68	68

SPT N =STANDARD PENETRATION TEST VALUE | RQD = ROCK QUALITY DESIGNATION | UDS = UNDISTURBED SOIL SAMPLE

CR = CORE RECOVERY | DS = DISTURBED SOIL SAMPLE | VST = VANE SHEAR TEST | W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-02
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 2 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
				10.00									
11.00	NX			11.00								78	70
12.00			Grayish BASALT	12.00								74	74
13.00				13.00								87	87
14.00				14.00								91	84
15.00				15.00								70	70
16.00				16.00								82	82
17.00				17.00								93	93
18.00				18.00								94	51
19.00				19.00								87	87
20.00				20.00								90	90
21.00				21.00								84	84

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: **ACME HOUSING INDIA PVT. LTD.**	BOREHOLE NO. :NBH-02
PROJECT	: **PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)**	SHEET NO. : 3 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
				21.00									
22.00	NX			22.00								93	80
			Grayish to Reddish BASALT										
23.00				23.00								88	88
24.00				24.00								76	76
25.00				25.00								82	82
26.00			Grayish BASALT	26.00								88	80
27.00				27.00								86	71
28.00				28.00								88	88
29.00													
30.00													
31.00													
32.00													

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : BOREHOLE IS TERMINATED AT 28.00 MTR BELOW EGL.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-03	
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 1 of 3	
LOCATION	: --		
CO-ORDINATES	: --	DATE	: 12/06/2019 TO 24/06/2019
GROUND R. L.	: 99.54m	METHOD	: ROTARY DRILLING
GROUND W. T.	: 2.00m	CASING	: 1.50m

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	TYPE OF SAMPLE	BLOWS/15cm 15	15	15	15	SPT N	C R %	RQD %
1.00	100 mm		Brownish Sand & Gravel with Boulders	1.00									
			Brownish Clay	1.50									
2.00				1.95		SPT 1	02	02	04	--	06		
3.00	NX		Brownish Clay with Gravels	3.00									
				3.45		SPT 2	03	05	06	--	11		
4.00				4.00									
5.00			Brownish Weathered BASALT	5.00									
6.00			Gray to Reddish BASALT	6.00								12	NIL
7.00				7.00								55	14
8.00				8.00								59	48
9.00				9.00								76	67
10.00			Grayish BASALT	10.00								71	52

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-03
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 2 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
11.00	NX		Grayish BASALT	10.00								83	83
12.00				11.00								73	65
13.00				12.00								71	71
14.00				13.00								81	70
15.00				14.00								83	83
16.00				15.00								91	82
17.00				16.00								89	53
18.00				17.00								82	82
19.00				18.00								80	80
20.00				19.00								87	87
21.00				20.00								86	86
				21.00									

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-03
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 3 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
				21.00									
												85	68
22.00	NX			22.00									
												88	79
23.00				23.00									
												82	82
24.00				24.00									
			Grayish BASALT									82	82
25.00				25.00									
												81	81
26.00				26.00									
												89	60
27.00				27.00									
												86	74
28.00				28.00									
29.00													
30.00													
31.00													
32.00													

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : BOREHOLE IS TERMINATED AT 28.00 MTR BELOW EGL.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-04	
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO.	: 1 of 3
LOCATION	: --		
CO-ORDINATES	: --	DATE	: 20/06/2019 TO 01/07/2019
GROUND R. L.	: 103.07m	METHOD	: ROTARY DRILLING
GROUND W. T.	: 4.50m	CASING	: 3.00m

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	TYPE OF SAMPLE	BLOWS/15cm 15	15	15	15	SPT N	C R %	RQD %
1.00	100 mm		Brownish Sand & Gravel with Boulders	1.00									
2.00			Boulders	2.00									
	NX			2.50									
				2.60		SPT 1	52	--	--	--	R		
3.00				3.00								11	NIL
4.00			Brownish Weathered Rock	4.00								19	NIL
5.00				5.00								16	NIL
6.00				6.00								33	33
7.00				7.00								53	33
8.00			Grayish BASALT	8.00								52	31
9.00				9.00								69	60
10.00				10.00								71	69

SPT N =STANDARD PENETRATION TEST VALUE | RQD = ROCK QUALITY DESIGNATION | UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY | DS = DISTURBED SOIL SAMPLE | VST = VANE SHEAR TEST | W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-04
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 2 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
11.00	NX			10.00								73	73
12.00			Grayish BASALT	11.00								85	77
13.00				12.00								91	91
14.00				13.00								87	87
15.00			Red to Grayish BASALT	14.00								90	90
16.00				15.00								79	58
17.00			Grayish BASALT	16.00								81	81
18.00				17.00								92	83
19.00				18.00								94	75
20.00			Gray to Reddish BASALT	19.00								90	80
21.00				20.00								93	85
				21.00									

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-04
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 3 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
22.00	NX		Grayish BASALT	21.00								95	95
				22.00									
23.00				23.00								93	86
24.00				24.00								86	86
25.00				25.00								82	82
26.00				26.00								88	88
27.00				27.00								79	79
28.00				28.00								82	82
29.00													
30.00													
31.00													
32.00													

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : BOREHOLE IS TERMINATED AT 28.00 MTR BELOW EGL.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: **ACME HOUSING INDIA PVT. LTD.**	BOREHOLE NO. :NBH-05	
PROJECT	: **PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)**	SHEET NO. : 1 of 3	
LOCATION	: --		
CO-ORDINATES	: --	**DATE**	: **12/07/2019 TO 18/07/2019**
GROUND R. L.	: **99.34m**	**METHOD**	: **ROTARY DRILLING**
GROUND W. T.	: **8.00m**	**CASING**	: **5.00m**

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	TYPE OF SAMPLE	BLOWS/15cm 15	15	15	15	SPT N	C R %	RQD %
1.00	100 mm		Brownish Sand & Gravel with Boulders	1.00		DS 1							
2.00	NX		Brownish Clay with Gravel	2.00									
				2.45		SPT 1	03	04	05	--	09		
3.00				3.50									
				3.95		SPT 2	03	05	06	--	11		
4.00													
5.00				5.00									
				5.45		SPT 3	05	07	09	--	16		
6.00				6.00								18	NIL
7.00			Brownish Weathered Rock (Fractured)	7.00								15	NIL
8.00				8.00								16	NIL
9.00				9.00								21	NIL
10.00				10.00								23	NIL

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-05
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 2 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
11.00	NX		Brownish Weathered Rock (Fractured)	10.00								24	NIL
				11.00									
12.00				12.00								27	NIL
13.00				13.00								29	NIL
14.00				14.00								26	NIL
15.00				15.00								31	20
16.00				16.00								38	NIL
17.00			Brownish Weathered Grayish BASALT (Fractured)	17.00								45	NIL
18.00				18.00								50	20
19.00			Grayish BASALT	19.00								75	67
20.00				20.00								77	77
21.00				21.00								75	75

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-05
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 3 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
				21.00									
22.00	NX			22.00								82	82
23.00				23.00								74	74
24.00				24.00								78	78
25.00			Grayish BASALT	25.00								81	77
26.00				26.00								87	87
27.00													
28.00													
29.00													
30.00													
31.00													
32.00													

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : BOREHOLE IS TERMINATED AT 26.00 MTR BELOW EGL.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-06	
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO.	: 1 of 2
LOCATION	: --		
CO-ORDINATES	: --	DATE	: 12/06/2019 TO 20/06/2019
GROUND R. L.	: 100.94m	METHOD	: ROTARY DRILLING
GROUND W. T.	: 1.00m	CASING	: 2.00m

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	TYPE OF SAMPLE	BLOWS/15cm 15	15	15	15	SPT N	C R %	RQD %
1.00	100 mm		Brownish Sand & Gravel with Boulders	1.50									
2.00				2.00									
3.00	NX			3.00								49	NIL
4.00				4.00								66	66
5.00				5.00								72	72
6.00			Grayish BASALT	6.00								80	50
7.00				7.00								83	60
8.00				8.00								87	85
9.00				9.00								92	92
10.00				10.00								79	79

SPT N =STANDARD PENETRATION TEST VALUE | RQD = ROCK QUALITY DESIGNATION | UDS = UNDISTURBED SOIL SAMPLE

CR = CORE RECOVERY | DS = DISTURBED SOIL SAMPLE | VST = VANE SHEAR TEST | W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-06
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 2 of 2

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
				10.00									
11.00	NX			11.00								83	68
12.00			Grayish BASALT	12.00								85	85
13.00				13.00								94	86
14.00				14.00								96	96
15.00				15.00								86	63
16.00				16.00								86	79
17.00				17.00								84	68
18.00				18.00								87	65
19.00				19.00								89	89
20.00				20.00								84	84
21.00													

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : BOREHOLE IS TERMINATED AT 20.00 MTR BELOW EGL.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.		BOREHOLE NO. :NBH-07 SHEET NO. : 1 of 2
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)		
LOCATION	: --		
CO-ORDINATES	: --	DATE	: 08/07/2019 TO 12/07/2019
GROUND R. L.	: 103.18m	METHOD	: ROTARY DRILLING
GROUND W. T.	: 6.00m	CASING	: 4.00m

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	TYPE OF SAMPLE	BLOWS/15cm 15	15	15	15	SPT N	C R %	RQD %
1.00	100 mm		Brownish Sand & Gravel with Boulders	1.00									
2.00	NX		Brownish Clay with Gravel	2.50									
3.00				2.95		SPT 1	03	04	05	--	09		
4.00				4.00									
				4.45		SPT 2	05	05	07	--	12		
5.00				5.50									
6.00				5.95		SPT 3	06	08	11	--	19		
7.00			Brownish Weathered Rock	7.00									
8.00				8.00								08	NIL
9.00				9.00								12	NIL
10.00			Grayish BASALT	10.00								79	79

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-07
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 2 of 2

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
				10.00									
11.00	NX			11.00								85	85
12.00			Grayish BASALT	12.00								83	73
13.00				13.00								80	69
14.00				14.00								82	82
15.00				15.00								85	80
16.00				16.00								90	66
17.00				17.00								96	94
18.00				18.00								91	82
19.00				19.00								84	84
20.00													
21.00													

SPT N =STANDARD PENETRATION TEST VALUE | RQD = ROCK QUALITY DESIGNATION | UDS = UNDISTURBED SOIL SAMPLE

CR = CORE RECOVERY | DS = DISTURBED SOIL SAMPLE | VST = VANE SHEAR TEST | W/L = Water Loss

REMARKS : BOREHOLE IS TERMINATED AT 19.00 MTR BELOW EGL.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: **ACME HOUSING INDIA PVT. LTD.**	BOREHOLE NO. :NBH-08	
PROJECT	: **PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)**	SHEET NO. : 1 of 3	
LOCATION	: --		
CO-ORDINATES	: --	**DATE**	: **12/07/2019 TO 18/07/2019**
GROUND R. L.	: **103.16m**	**METHOD**	: **ROTARY DRILLING**
GROUND W. T.	: **8.00m**	**CASING**	: **5.00m**

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	TYPE OF SAMPLE	BLOWS/15cm 15	15	15	15	SPT N	C R %	RQD %
1.00	100 mm		Brownish Sand & Gravel with Boulders	1.50		DS 1							
2.00	NX		Brownish Clay with Gravel	3.00									
3.00				3.45		SPT 1	03	04	04	--	08		
4.00				4.50									
5.00				4.95		SPT 2	05	07	08	--	15		
6.00				6.00									
7.00			Brownish Clay with Weathered Rock	6.45		SPT 3	08	11	15	--	26		
8.00				7.00									
9.00			Brownish Weathered Rock (Fractured)	8.00								16	NIL
10.00				9.00								19	NIL
				10.00								18	NIL

SPT N =STANDARD PENETRATION TEST VALUE | RQD = ROCK QUALITY DESIGNATION | UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY | DS = DISTURBED SOIL SAMPLE | VST = VANE SHEAR TEST | W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-08
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 2 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
11.00	NX		Brownish Weathered Rock	10.00 11.00								14	NIL
12.00				12.00								23	NIL
13.00				13.00								33	12
14.00				14.00								39	15
15.00				15.00								82	82
16.00			Grayish BASALT (Fractured)	16.00								85	61
17.00				17.00								82	67
18.00				18.00								82	82
19.00				19.00								79	68
20.00				20.00								93	93
21.00				21.00								92	82

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-08
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 3 of 3

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
22.00	NX		Grayish BASALT	21.00 22.00								90	85
23.00													
24.00													
25.00													
26.00													
27.00													
28.00													
29.00													
30.00													
31.00													
32.00													

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : BOREHOLE IS TERMINATED AT 22.00 MTR BELOW EGL.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-09	
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 1 of 2	
LOCATION	: --		
CO-ORDINATES	: --	DATE	: 07/07/2019 TO 12/07/2019
GROUND R. L.	: 104.02m	METHOD	: ROTARY DRILLING
GROUND W. T.	: 8.00m	CASING	: 5.00m

DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	TYPE OF SAMPLE	BLOWS/15cm 15	15	15	15	SPT N	C R %	RQD %
1.00	100 mm		Brownish Sand & Gravel with Boulders	1.00									
2.00				2.00									
	NX			2.45		SPT 1	03	03	04	--	07		
3.00			Brownish Clay with Gravel										
				3.50									
4.00				3.95		SPT 2	03	04	06	--	10		
5.00				5.00									
				5.45		SPT 3	05	07	08	--	15		
6.00				6.00									
7.00				7.00									
8.00			Brownish Weathered Rock (Fractured)	8.00									
9.00				9.00								19	NIL
10.00				10.00								22	NIL

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : CONTINUE ON NEXT PAGE.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

CLIENT	: ACME HOUSING INDIA PVT. LTD.	BOREHOLE NO. :NBH-09
PROJECT	: PROPOSED HIGH RISE BUILDINGS FENELIA & EUCALYPITA AT ACME OZONE, THANE (W)	SHEET NO. : 2 of 2


DEPTH (m.)	DIA. OF BORE HOLE	LOG.	STRATA DESCRIPTION	DEPTH (m)	DRILLING TIME (Min)	BLOWS/15cm TYPE	15	15	15	15	SPT N	C R %	RQD %
11.00	NX		Brownish Weathered Rock (Fractured)	10.00 11.00								15	NIL
12.00				12.00								41	NIL
13.00				13.00								27	NIL
14.00			Brown to Grayish BRECCIA (Fractured)	14.00								33	NIL
15.00				15.00								37	NIL
16.00				16.00								51	NIL
17.00				17.00								37	NIL
18.00				18.00								57	11
19.00			Brown to Grayish BASALT (Fractured)	19.00								68	12
20.00			Grayish BASALT (Fractured)	20.00								70	34
21.00													

SPT N =STANDARD PENETRATION TEST VALUE RQD = ROCK QUALITY DESIGNATION UDS = UNDISTURBED SOIL SAMPLE
CR = CORE RECOVERY DS = DISTURBED SOIL SAMPLE VST = VANE SHEAR TEST W/L = Water Loss

REMARKS : BOREHOLE IS TERMINATED AT 20.00 MTR BELOW EGL.

M/S. SHREE SAMARTH KRUPA GEOTECHNICS

SUB - SURFACE PROFILE

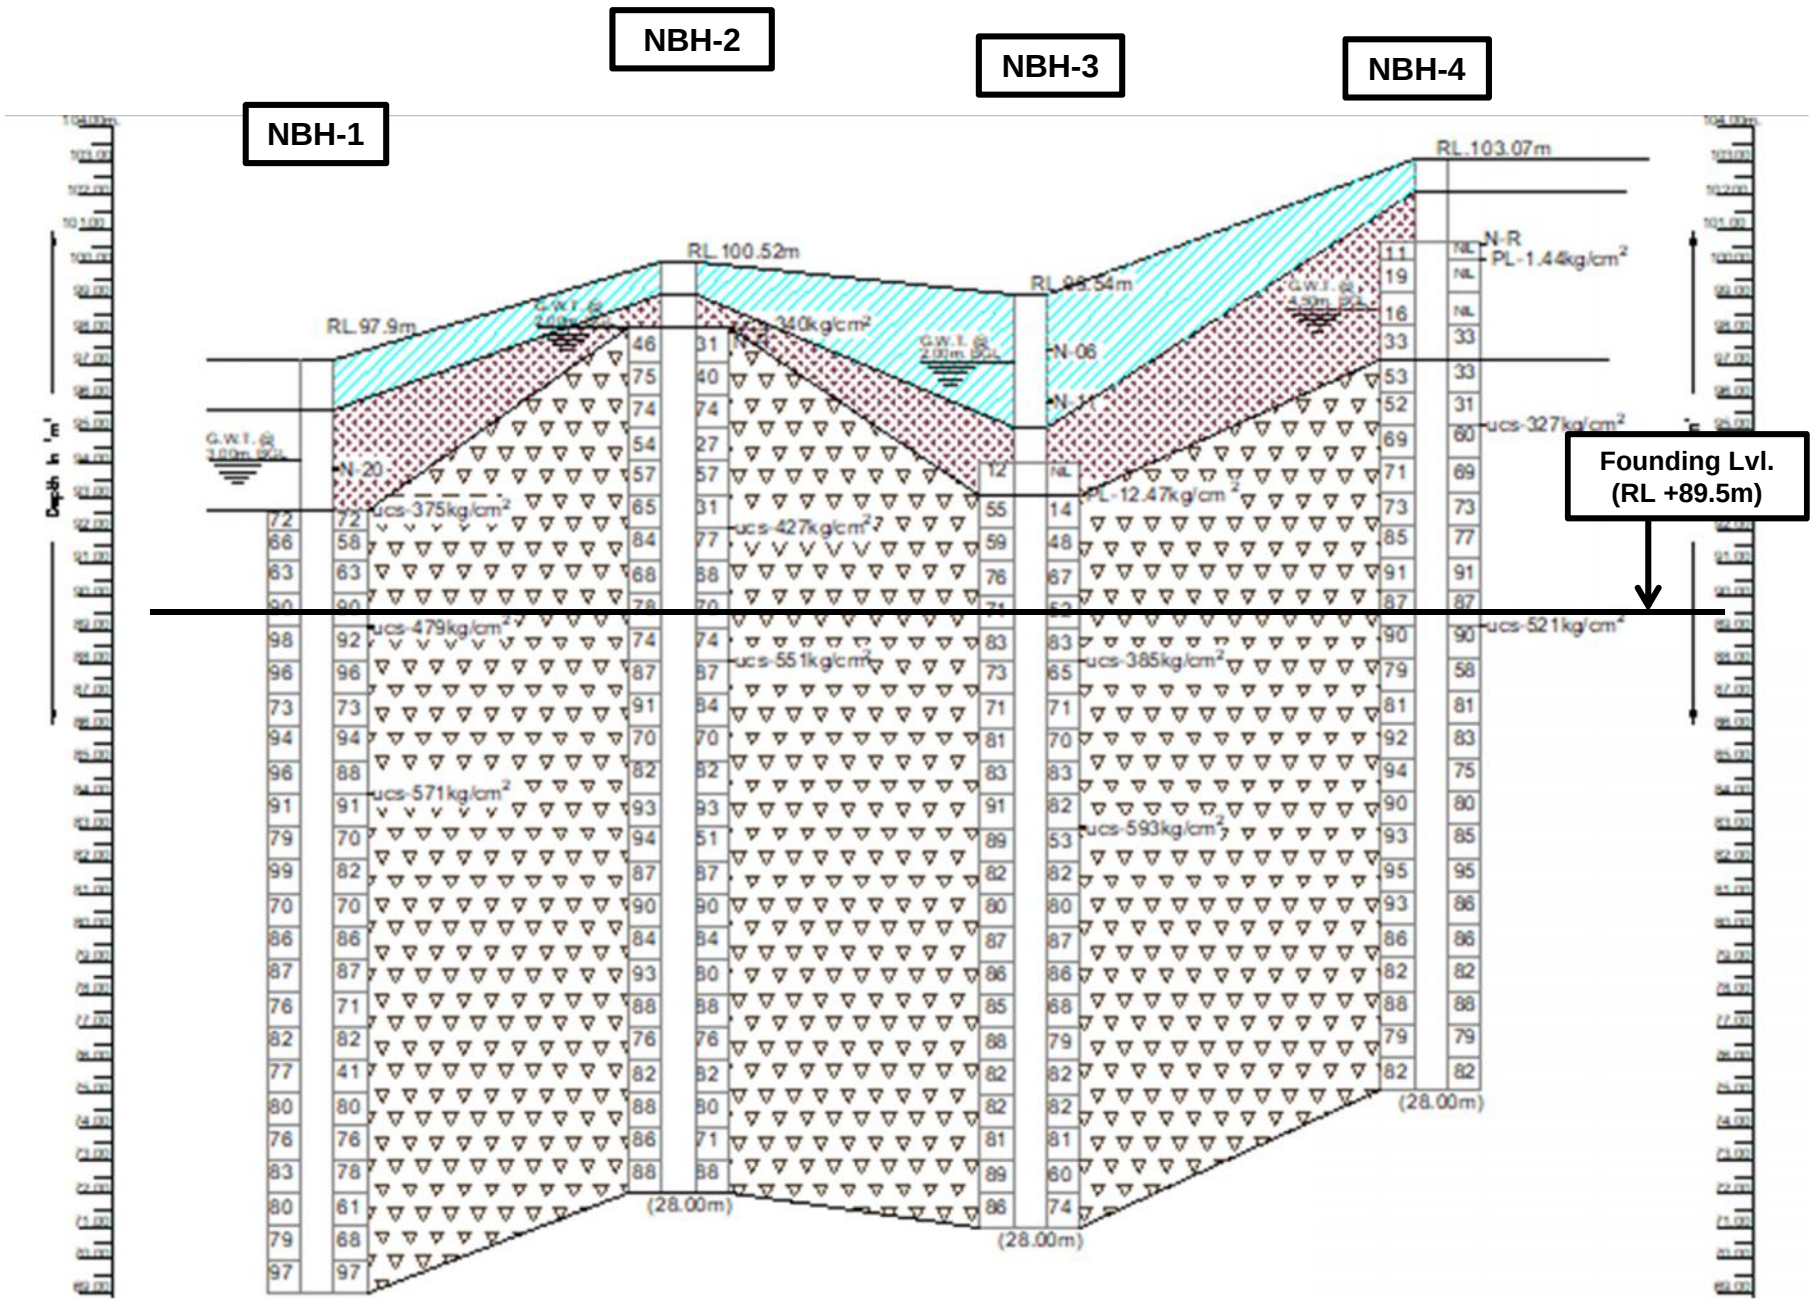

SOIL TEST DATA SHEET As per IS 2720 Part 3, 4, 5, 40

PROJECT: PROPOSED HIGH RISE BUILDINGS "FENELIA & EUCALYPITA" AT ACME OZONE, THANE (W)

CLIENT: ACME HOUSING INDIA PVT. LTD.

DATE: 25.07.2019

Bore Hole No.	Depth in m.	Sample Type UD / D	Density gm/ cm^3		Natural Moisture Content, w %	Soil Classification (I.S)	Mechanical Analysis				Consistancy Limits				Shear Strength Test			Unconfined Compression Test Kg/cm^2	free swell index	Verical Consolidation		Specific Gravity	Remarks
			Wet Density	Dry Density			Gravel %	Sand %	Silt %	Clay %	Liquid %	Plastic %	Plasticity Index, I_p %	Shrinkage Limit %	Shrinkage Ratio	Cohesion C_u kg/cm^2	Degree			Comp. Index C_{cv} (Lab)	Initial Void Ratio		
BH-01	3.00-3.60	SPT	-----	-----	-----	CH	2	15	83	----->	65	29	36		-----	-----	-----	-----	-----	-----	-----	-----	
BH-03	3.00-3.45	SPT	-----	-----	-----	CH	5	19	76	----->	57	25	32		-----	-----	-----	-----	-----	-----	-----	-----	
BH-05	3.50-3.95	SPT	-----	-----	-----	CH	0	20	80	----->	60	27	33		-----	-----	-----	-----	-----	-----	-----	-----	
BH-07	4.00-4.45	SPT	-----	-----	-----	CH	3	20	77	----->	58	26	32		-----	-----	-----	-----	-----	-----	-----	-----	
BH-09	3.50-3.95	SPT	-----	-----	-----	CH	9	22	69	----->	55	22	33		-----	-----	-----	-----	-----	-----	-----	-----	

CHEM : Chemical Analysis
COMP : Compaction Test
DS : Direct Shear
K : Permeability Test
FSI : Free Swell Test

Tuu : Triaxial Test (Unconsolidated Undrained)
Tcu : Triaxial Test (Consolidated Undrained)
Tcd : Triaxial Test (Consolidated Drained)
NP : Non Plastic
SL : Shrikage Limit Test

SP : Swelling Pressure or Swelling Potential Test
SPT : Standard Penetration Test Sample
UDS : Undisturbed Soil Sample
VL : Laboratory Vane Shear Test
UC : Unconfined Compression Test


ϕ : Angle of Internal Friction
Cc : Undrained Cohesion
ϕ' : Effective Angle of Internal Friction
Cc' : Effective Cohesion
-----> : Combined Silt + Clay

GEOCON INTERNATIONAL PVT. LTD ISO 9001:2015

Job. No. : **L-19/412**

GRAIN SIZE DISTRIBUTION ANALYSIS

PROJECT:	PROPOSED HIGH RISE BUILDINGS “FENELIA & EUCALYPITA” AT ACME OZONE, THANE (W)
CLIENT:	ACME HOUSING INDIA PVT. LTD.

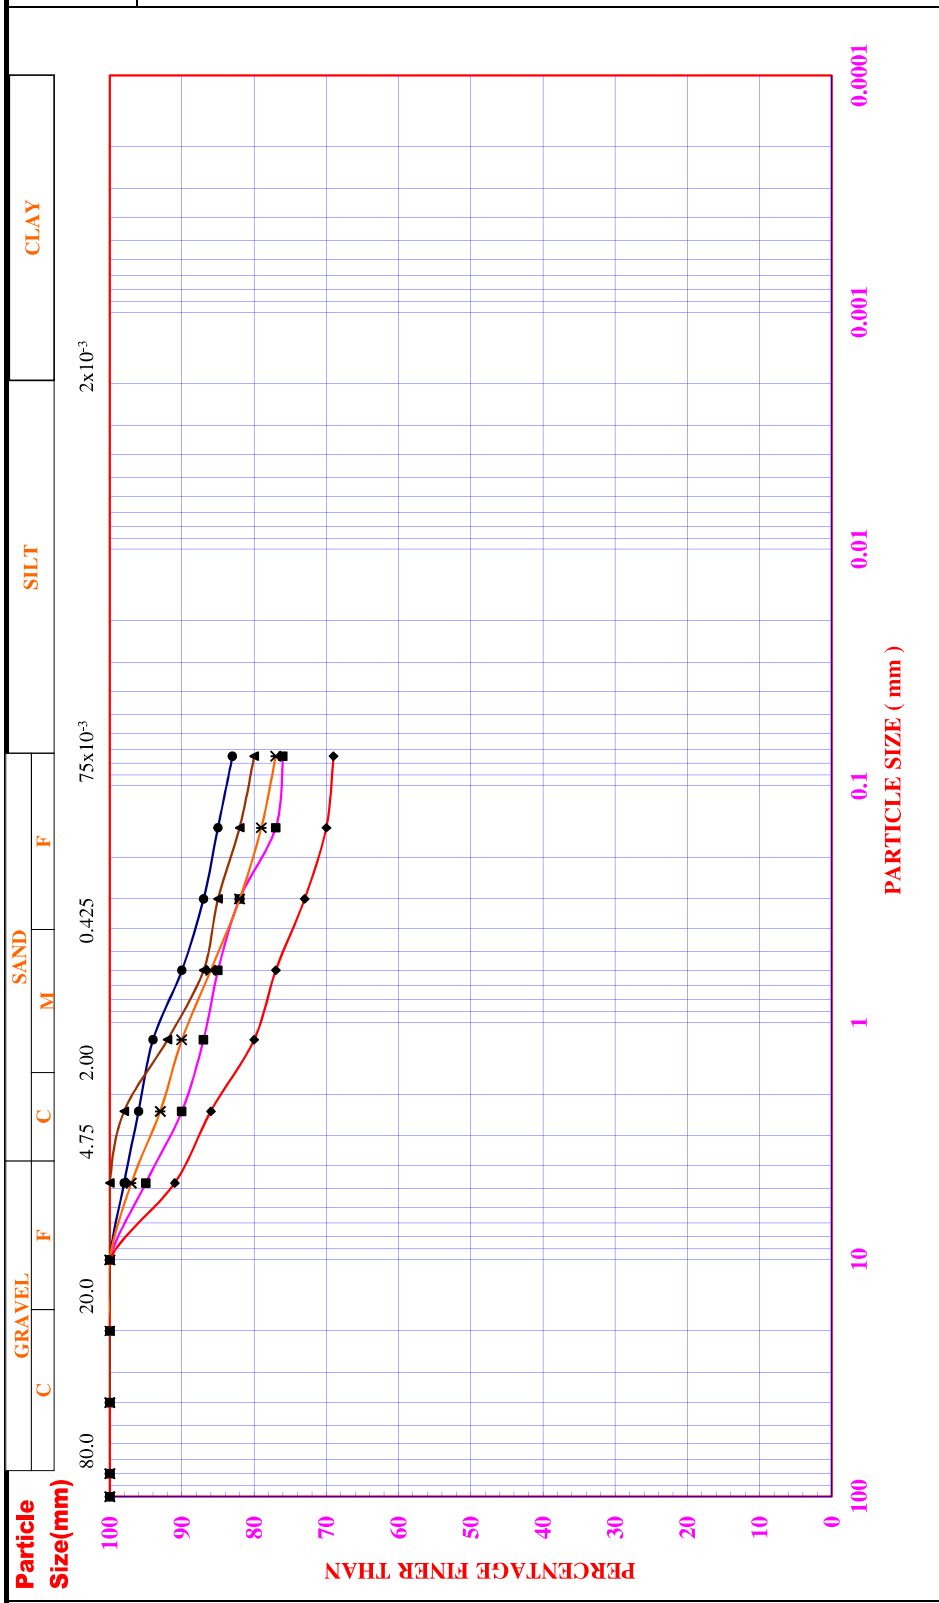

Symbol	Bore Hole No.	Depth in m.	Classification (IS)	Gravel %	Sand %	Silt %	Clay %	10% mm	30% mm	60% mm	Coeff. of Uniformity, C_u = D_{60} / D_{10}	Coeff. Of Curvature C_c $D_{30}^2/(D_{60} \cdot D_{10})$	Liquid Limit, W_l	Plastic Limit, W_p	Plasticity Index, I_p	Remarks
●	BH-01	3.00-3.60	CH	2	15	83	---->	-----	-----	-----	-----	-----	65	29	36	SPT
■	BH-03	3.00-3.45	CH	5	19	76	---->	-----	-----	-----	-----	-----	57	25	32	SPT
◄	BH-05	3.50-3.95	CH	0	20	80	---->	-----	-----	-----	-----	-----	60	27	33	SPT
✳	BH-07	4.00-4.45	CH	3	20	77	---->	-----	-----	-----	-----	-----	58	26	32	SPT
◆	BH-09	3.50-3.95	CH	9	22	69	---->	-----	-----	-----	-----	-----	55	22	33	SPT

GEOCON INTERNATIONAL PVT. LTD. MUMBAI
ISO 9001:2015

Job No. : L-19/412

TEST RESULTS OF ROCK CORES As per IS 9143, 8764, 13030

CLIENT: ACME HOUSING INDIA PVT. LTD.

PROJECT: PROPOSED HIGH RISE BUILDINGS "FENELIA & EUCALYPITA" AT ACME OZONE, THANE (W)

Date : 24.07.2019

Sr. No.	Bore Hole No.	Core No.	Depth, m	Diameter, cm	Height, cm	H : D (1:H/D)	Correction Factor	Condition of Test	Failure Load	Uniaxial Compressive Strength	Modulus of Elasticity	Point Load Index (Dimetrical)	Point Load Index (Axial)	Brazilian Test	Porosity	Water Absorption	Dry Density	Specific Gravity	Remark
				cm	cm				kN	kg/cm2	kg/cm2	kg/cm2		N/mm2	%	%	gm/cm3		
1	BH-01	1	4.50-5.00	5.40	10.94	2.03	1.00	Soaked	84.0	375	--	---	---	---	1.60	0.60	2.67		
2	BH-01	15	8.00-9.00	5.42	11.05	2.04	1.00	Soaked	108.0	479	--	--	---	---	1.18	0.43	2.71		
3	BH-01	22	13.00-14.00	5.43	11.10	2.04	1.00	Soaked	129.0	571	---	---	---	---	0.78	0.28	2.75		
4	BH-02	4	2.00-3.00	5.40	11.00	2.04	1.00	Soaked	76.0	340	--	--	---	---	-1.59	-0.60	2.66		
5	BH-02	29	8.00-9.00	5.44	11.14	2.05	1.01	Soaked	96.8	427	---	---	---	---	1.93	0.72	2.70		
6	BH-02	45	12.00-13.00	5.42	11.12	2.05	1.01	Soaked	124.0	551	--	--	---	---	0.78	0.29	2.73		
7	BH-03	5	6.00-7.00	5.40	8.05	1.49	0.95	Soaked	3.5	--	--	12.47	---	---	1.63	0.63	2.60		
8	BH-03	30	11.00-12.00	5.40	11.06	2.05	1.01	Soaked	86.0	385	--	--	---	---	2.37	0.88	2.68		
9	BH-03	44	16.00-17.00	5.43	11.15	2.05	1.01	Soaked	134.0	593	--	--	---	---	1.55	0.56	2.75		
10	BH-04	4	3.00-4.00	5.36	8.00	1.49	0.95	Soaked	0.4	--	--	1.44	---	---	4.99	2.49	2.01		
11	BH-04	25	8.00-9.00	5.40	11.03	2.04	1.00	Soaked	73.0	327	--	--	---	---	1.98	0.74	2.69		
12	BH-04	40	14.00-15.00	5.43	11.14	2.05	1.01	Soaked	117.6	521	--	--	---	---	1.16	0.42	2.74		

GEOCON INTERNATIONAL PVT. LTD. MUMBAI ISO 9001:2015

Job. No. : L-19/412

Checked by: KOMAL

TEST RESULTS OF ROCK CORES As per IS 9143, 8764, 13030

CLIENT: ACME HOUSING INDIA PVT. LTD.

PROJECT: PROPOSED HIGH RISE BUILDINGS "FENELIA & EUCALYPITA" AT ACME OZONE, THANE (W)

Date : 24.07.2019

Sr. No.	Bore Hole No.	Core No.	Depth, m	Diameter, cm	Height, cm	H : D (1:H/D)	Correction Factor	Condition of Test	Failure Load	Uniaxial Compressive Strength	Modulus of Elasticity	Point Load Index (Dimetrical)	Point Load Index (Axial)	Brazilian Test	Porosity	Water Absorption	Dry Density	Specific Gravity	Remark
				cm	cm				kN	kg/cm2	kg/cm2	kg/cm2		N/mm2	%	%	gm/cm3		
13	BH-05	2	6.00-7.00	5.34	7.90	1.48	0.94	Soaked	0.8	---	--	2.90	---	---	5.09	2.50	2.03		
14	BH-05	18	12.00-13.00	5.36	8.05	1.50	0.95	Soaked	1.0	---	--	3.60	---	---	4.40	2.13	2.07		
15	BH-05	40	17.00-18.00	5.40	11.09	2.05	1.01	Soaked	142.0	636	---	---	---	---	0.39	0.14	2.76		
16	BH-06	5	2.00-3.00	5.40	8.10	1.50	0.95	Soaked	4.0	---	--	14.26	---	---	6.47	2.45	2.64		
17	BH-06	25	7.00-8.00	5.42	11.07	2.04	1.00	Soaked	104.6	464	---	---	---	---	0.78	0.29	2.72		
18	BH-07	1	8.00-9.00	5.36	8.08	1.51	0.95	Soaked	0.5	---	--	1.80	---	---	4.94	2.36	2.09		
19	BH-07	11	12.00-13.00	5.41	11.14	2.06	1.01	Soaked	126.7	566	--	---	---	---	0.98	0.36	2.73		
20	BH-08	1	7.00-8.00	5.35	8.02	1.50	0.95	Soaked	0.5	---	--	1.81	---	---	5.55	2.76	2.01		
21	BH-08	10	15.00-16.00	5.42	11.00	2.03	1.00	Soaked	101.4	450	--	--	---	---	1.58	0.59	2.69		
22	BH-09	6	11.00-12.00	5.37	7.94	1.48	0.94	Soaked	1.3	--	--	4.67	---	---	4.45	2.09	2.12		
23	BH-09	27	17.00-18.00	5.40	11.12	2.06	1.01	Soaked	88.6	397	--	--	---	---	2.36	0.88	2.67		
24	BH-09	40	19.00-20.00	5.38	8.10	1.51	0.95	Soaked	1.1	---	--	3.94	---	---	2.72	1.30	2.10		

GEOCON INTERNATIONAL PVT. LTD. MUMBAI ISO 9001:2015

Job. No. : L-19/412

Checked by: KOMAL

CHEMICAL TEST RESULT OF GROUND WATER SAMPLES.

As per IS 3025 Part 11, 24, 32

Date: 24.07.2019

CLIENT: ACME HOUSING INDIA PVT. LTD.

PROJECT: PROPOSED HIGH RISE BUILDINGS "FENELIA & EUCALYPITA" AT ACME OZONE, THANE (W)

SR NO.	BH NO.	DEPTH IN METERS	TYPE OF SAMPLE	pH ELECTROMETERICALLY	SULPHATE AS SO_3 ppm	CHLORIDE AS Cl ppm	REMARKS
				* Limit between 6.3 to 8.5	* Limit <400ppm Maximum	* Limit <2000ppm Maximum	
1	BH-01	--	Water	7.42	46.00	124.00	
2	BH-02	--	Water	7.48	57.00	148.00	
3	BH-03	--	Water	7.44	52.00	136.00	
4	BH-04	--	Water	7.50	64.00	162.00	

GEOCON INTERNATIONAL PVT. LTD. MUMBAI ISO 9001:2015

Job. No. :	L-19/412
Checked By	KOMAL