
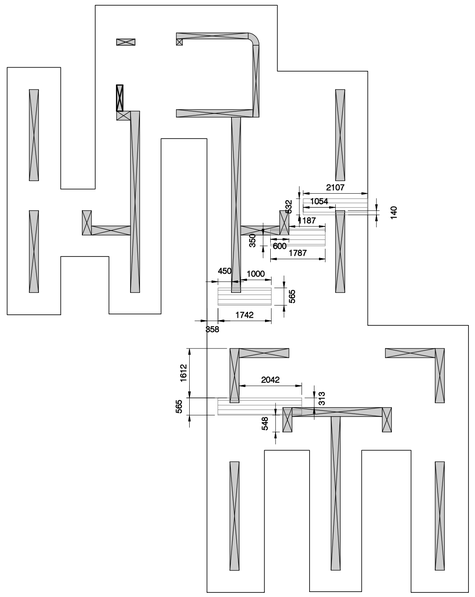



TOP BARS (3rd LAYER)(As marked)

X DIRECTION - T20 @ 175 c/c

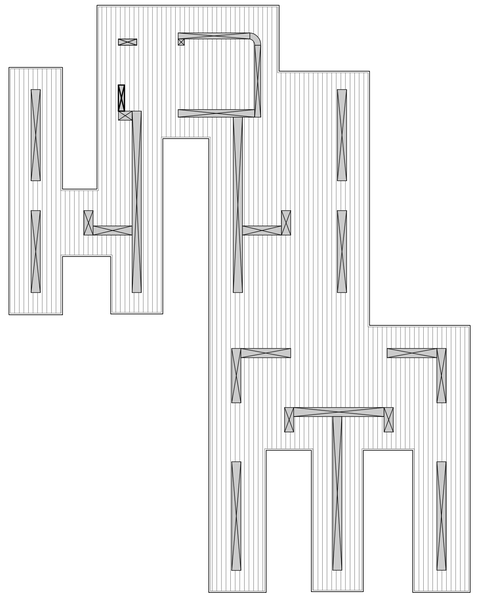

TOP BARS (1st LAYER)(Full length)


Y DIRECTION - T20 @ 175 c/c

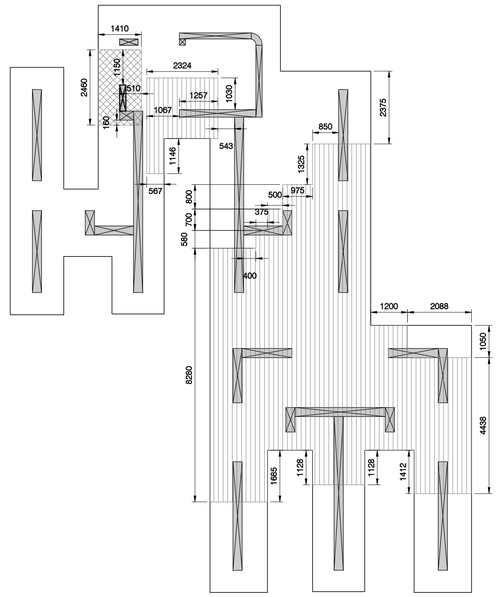

TOP BARS (2nd LAYER)(As marked)

Y DIRECTION - T25 @ 175 c/c


Y DIRECTION - T16 @ 175 c/c

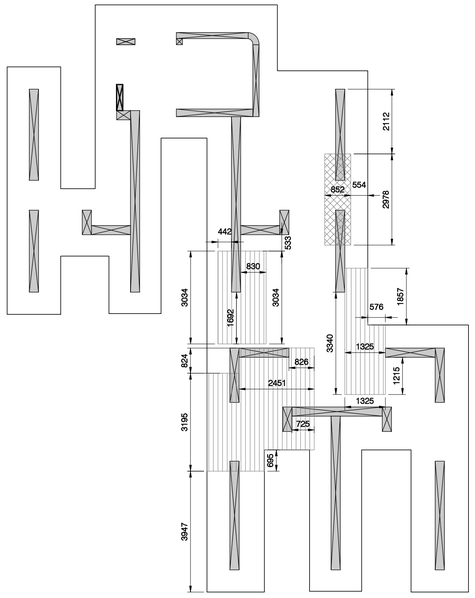

TOP BARS (3rd LAYER)(As marked)

Y DIRECTION - T25 @ 175 c/c

Y DIRECTION - T20 @ 175 c/c



INDEX PLAN FOR COMBINED FOOTING
DETAIL "M"
500 MM DEPTH



BOTTOM BARS (1st LAYER) (Full length)

X DIRECTION - T16 @ 175 c/c



BOTTOM BARS (1st LAYER)(Full length)

Y DIRECTION - T16 @ 175 c/c



TOP BARS (1st LAYER)(Full length)

X DIRECTION - T12 @ 175 c/c



TOP BARS (1st LAYER)(Full length)

Y DIRECTION - T12 @ 175 c/c

NOTES:

1. Basic reference code:- IS 456: 2000
2. Due care shall be taken to ascertain that requisite strength of concrete is gained before commencement of deshuttering. It shall comply with provisions of Clause No. 11.3 of IS 456: 2000.
3. Nominal covers

		Mild	Moderate	Severe
I	Footings	50	50	50
II	Columns & walls >200mm width (to links of column)	40	40	45
III	Columns & walls with width of 200mm & below having reinf. of dia. 16mm & above. (to links of column)	40	40	45
IV	Columns & walls with width of 200mm & below having reinf. of dia. 12mm. (to links of column)	25	30	45
V	Slabs	20	30	45
VI	Beams (to stirrups of beam)	20	30	45
VII	Lift walls	40	40	45

For main reinf. up to 12mm dia. bar for mild exposure the nominal cover may be reduced by 5mm for slabs & beams only.

4. Beams with depth more than 750mm, provide side-face reinforcement.
5. Substratum shall be approved from our office before laying P.C.C.
6. Minimum clear spacing between any two longitudinal bars in beam= 50mm.
7. All laps (Ld) shall be staggered & not more than 50% bars to be lapped at any given section.

GRADE OF REINF.	M20	M25	M30	M35	M40 & ABOVE
Fe415	48 X D	41 X D	38 X D	34 X D	30 X D
Fe500 (TMT)	57 X D	49 X D	46 X D	40 X D	36 X D

For bundled bars, Ld shall be increased by 10% for 2 bars in contact, 20% for 3 bars in contact and 33% for 4 bars in contact.

8. All buildings shall have tie beams/plinth beams at ground/plinth level.
9. If footings overlap with each other, necessary revision shall be obtained from our office.
10. Design is valid for number of floors as indicated in the drawing.
11. At any level where column size gets reduced in either dimension tie beams/plinth beams are essential.
12. For cantilevers, top bars to be anchored behind from external face of support for - Ld or span of cantilever - whichever is greater.
13. Fire rating considered:- 2 Hour max.

Use of this drawing for construction shall explicitly confirm acceptance of following conditions by Owner / Builder / Contractor

1. Our responsibility shall remain limited to safe and sound structural design as transmitted by this drawing and we shall not remain responsible for
   a) Safety of old structure during demolition.
   b) Safety of any adjoining building /persons staying in adjoining building/persons and properties on adjoining roads.
   c) Safety of construction worker/any personnel at work site during construction
   d) Correctness/safety of any temporary structure, scaffolding, shuttering, centering erected at site and any injury to any personnel arising out of any accidents.
   e) Accidents occurring due to premature deshuttering, faulty / substandard construction material or workmanship / faulty construction procedure.
   f) Any accident occurring due to construction of elements of buildings not designed by us.
2. Supervision if specifically asked for will be provided to the extent of verification of reinforcement on site but responsibility regarding correct & sound construction shall solely rest with contractor/ builder / owner.
3. All structural concrete should be weigh batched, machine mixed and mechanically vibrated.
4. Any discrepancy between our drawing & Architects' drawing shall be brought to our notice before construction.
5. This drawing is property of JW CONSULTANTS LLP and shall not be reproduced or used without explicit permission of this office.

NO.	REV. DATE	DESCRIPTION	NO.	REV. DATE	DESCRIPTION
R0	04.02.2023	.	R5	.	.
R1	.	.	R6	.	.
R2	.	.	R7	.	.
R3	.	.	R8	.	.
R4	.	.	R9	.	.

DRAWING IS VALID FOR CONSTRUCTION, PROVIDED IT IS SIGNED & STAMPED BY OUR OFFICE

GRADE OF CONCRETE:-	M40
GRADE OF STEEL:-	Fe - 550D (12mm Above) Fe - 500 (8mm & 10mm)
ENVIRONMENTAL EXPOSURE CONDITION:-	SEVERE
S.B.C. :-	300 T/sq.m.

CHECKED BY	DEALT BY	DRAWN BY	DRG. NO.	BLDG:	JOB NO.
R A W	S.G.	Sumeet	101060-112-9	HORIZONTAL	10:1060

DEVELOPER:- LODHA DEVELOPER

ARCHITECT:- KAPADIA ASSOCIATES

PROJECT:- ACME,LODHA

TITLE:- INDEX PLAN FOR RCC COLUMN FOOTING

LLP IDENTITY NO.: AAA-2650
PARTNERSHIP WITH LIMITED LIABILITY

Formerly Y S Sane Associates
JW CONSULTANTS LLP
www.jwconsultants.in
design@jwconsultants.in

PUNE OFFICE
SAI RADHE,OFFICE NO 201,2ND FL.,100 KENNEDY ROAD,
BEHIND HOTEL LE MERIDIEN, PUNE 411001
Tel. +91 20 66449100 FAX: +91 20 66449299

MUMBAI OFFICE
314, 3RD FLOOR, PRABHADEVI INDUSTRIAL ESTATE,
VEER SAVARKAR MARG, PRABHADEVI, MUMBAI-400025
Tel. +91 22 66322845/46 FAX: +91 22 66322850