LEDS C4


Installation Instructions
3D File
Dialux | ULD
Revit

Cubus

05-9685-Z5-CL

Wall fixture IP65 Cubus LED 11W 3000K Urban grey 701lm





TECHNICAL FEATURES

IP65 IK04 ±45º

Power (W) : 11W

Total power consumption of light (W) : 13W

Real lumens : 701

Real lm/W : 54

Correlated Colour Temperature (CCT) : LED warm-white 3000K

Tipus Regulació : ON-OFF

Lens / reflector angle : FLOOD 71º

Structure material : Aluminium

Structure finish : Urban grey

Diffuser material : Glass

Diffuser finish : Matt

Voltage / frequency : 100-240V/50-60Hz

Power Factor : 0.90

Useful life : 50.000h L80B20

Max. temperature : 25ºC

Warranty : 5 Years

Energy efficiency : LED A++

LUMINOTECHNIC FEATURES

Light source: LED

CRI: 80

MacAdam steps: 3

Photobiological risk: RG0

VENTILATION FEATURES

Power used: 13W

Service value measurement standard: EN 60879:2019


LOGISTICS


Net weight (kg): 1.02

Packaged weight (kg): 1.14

Packaging: 145mm x 130mm x 180mm

4 Un

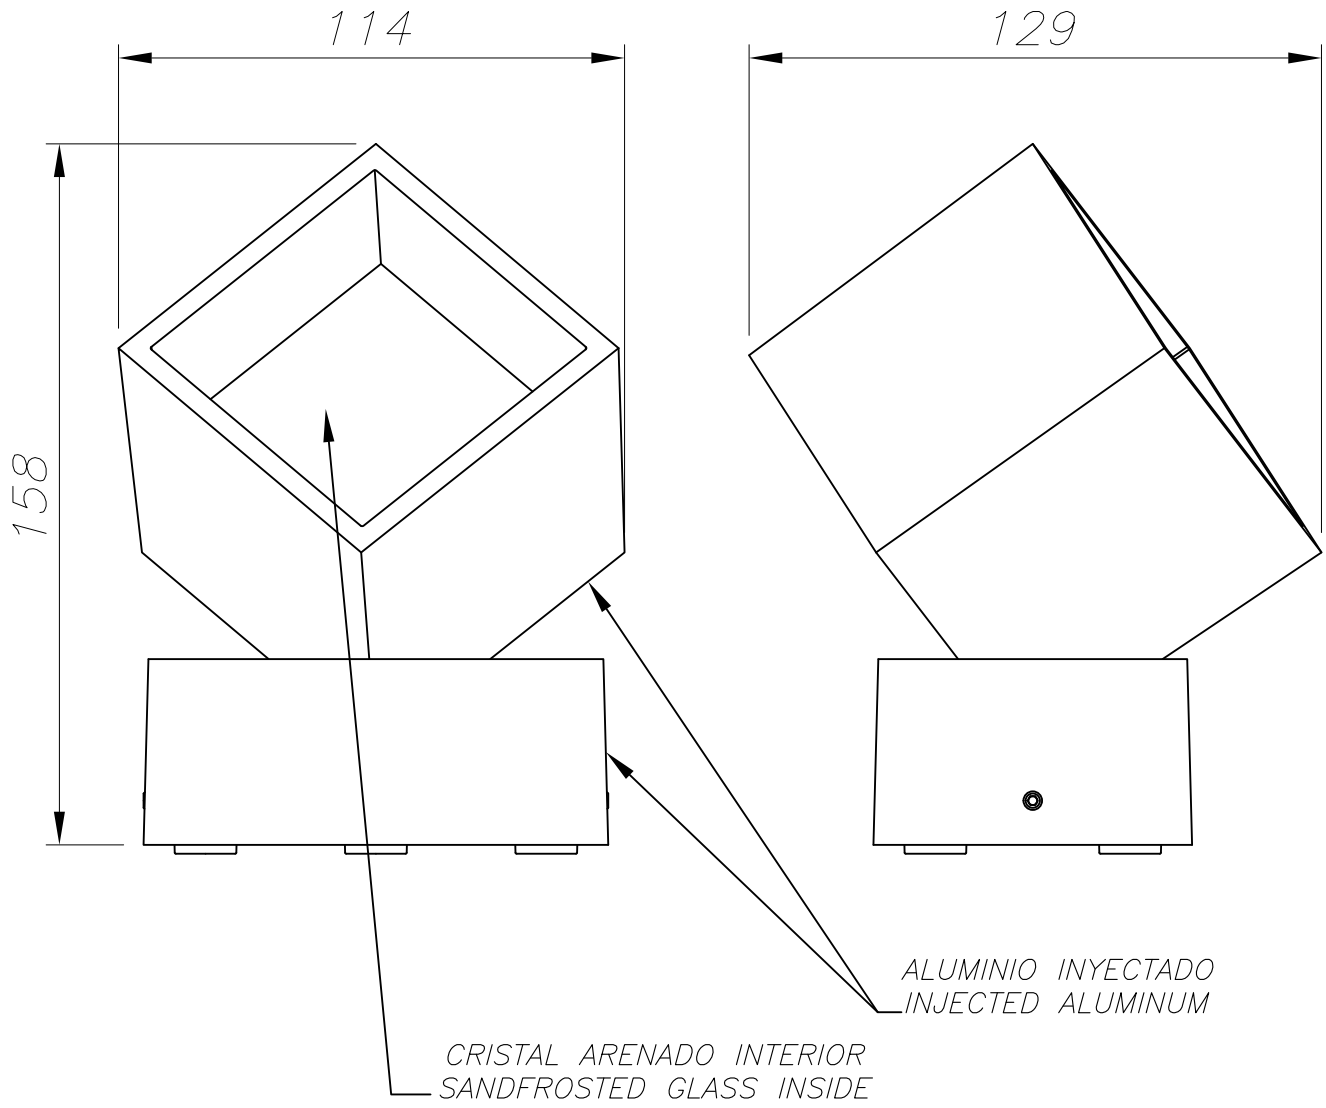

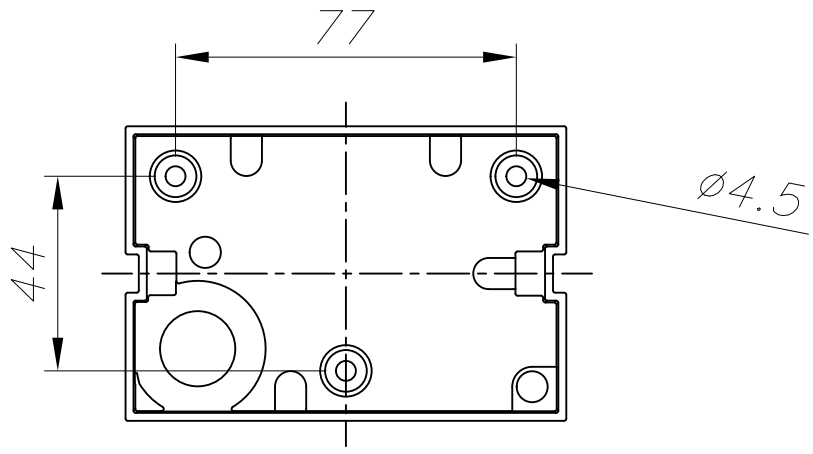


PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE


LEDS·C4

OUTDOOR


05-9685

①




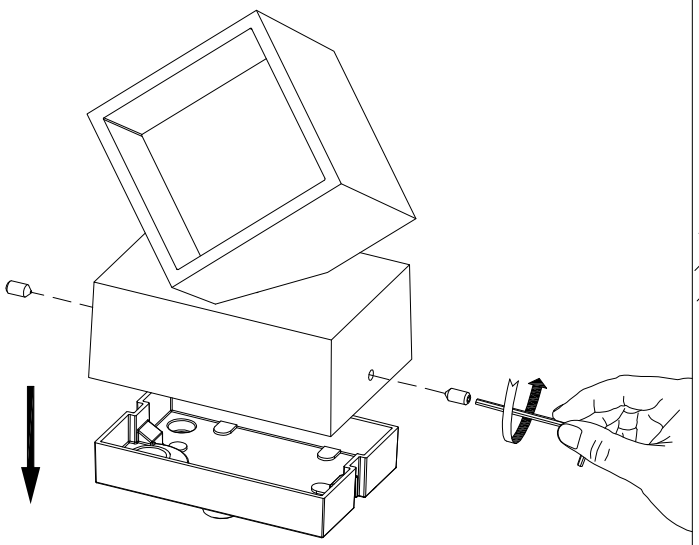

②

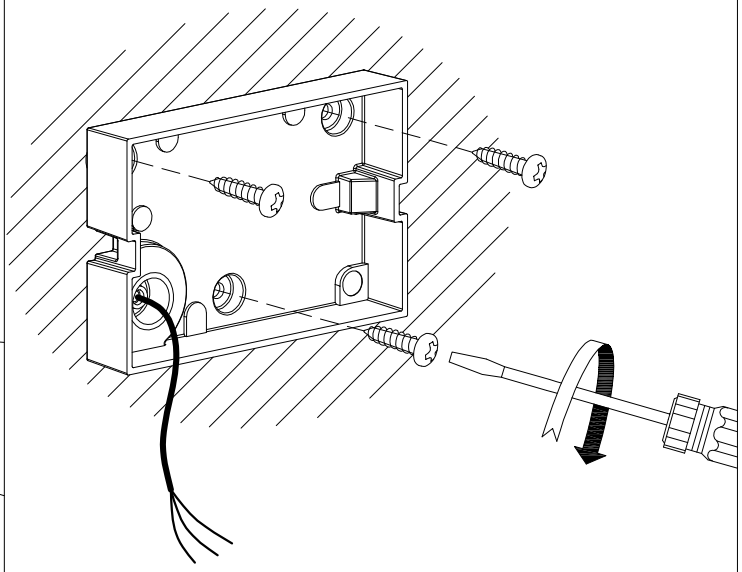

③

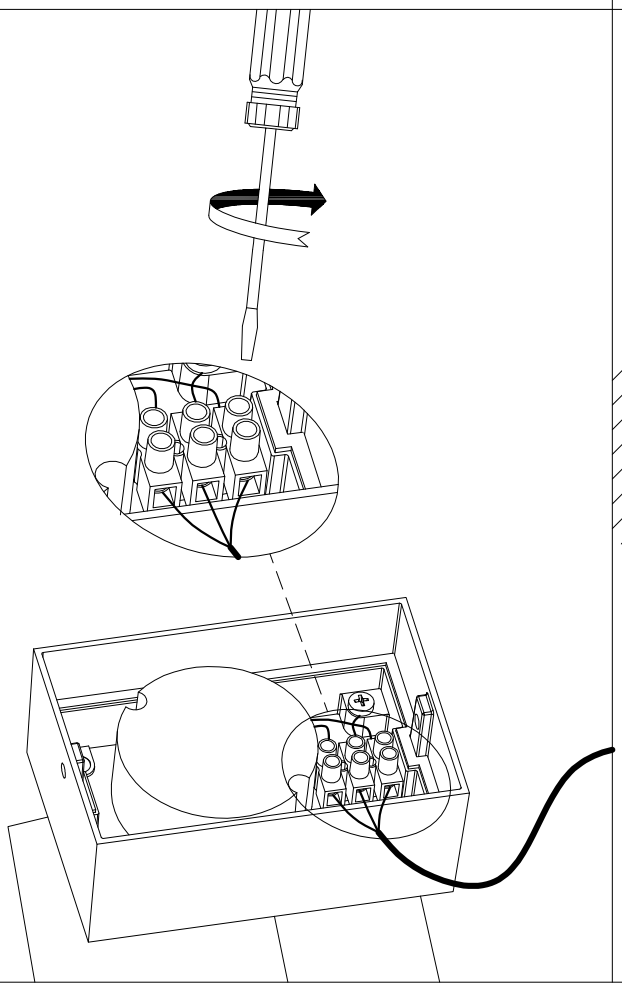

④

