LLP IDENTITY NO.: AAA-2650
PARTNERSHIP WITH LIMITED LIABILITY

JW CONSULTANTS LLP
www.jwconsultants.in
design@jwconsultants.in

PUNE OFFICE
SAI RADHE,OFFICE NO 201,2ND FL.,100 KENNEDY ROAD,
BEHIND HOTEL SHERATON GRAND, PUNE - 411001.
Tel. ☎ +91 20 66449100

MUMBAI OFFICE
RUPAREL IRIS, 2ND FLOOR, NEAR MAGNET MAII, TULSI
PIPE ROAD, MATUNGA - W , MUMBAI - 400016.
Tel. ☎ +91 22 24397400

ATTN.:- Mr. RUMAN BAIG


C.C.:-


PROJECT:-ACME LODHA , THANE

REF.:- **101060 -HORIZONTAL-111-1**
INDEX PLAN FOR RCC COLUMN FOOTING PART PLAN

FROM:-R.A.W

DATE: 08.05.2023

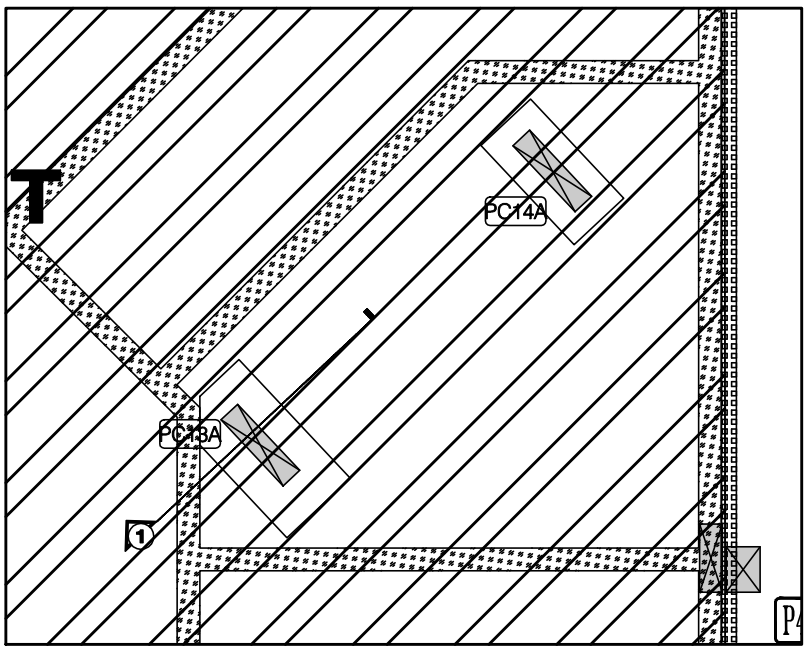

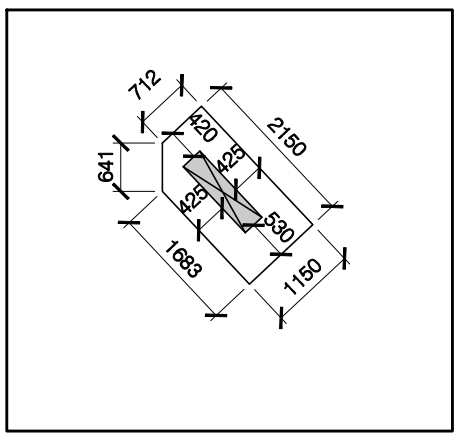


INDEX PLAN FOR RCC COLUMN FOOTING PART PLAN

SCALE 1:100

FOOTING SCHEDULE (M40:Fe550)

COLUMN NUMBERS	FOOTING TYPE	FOOTING DIMENSION					FOOTING REINFORCEMENT				SFR	REMARKS
		STEP	L	B	D1	D2	BOTTOM		TOP			
							ALONG B	ALONG L	ALONG B	ALONG L		
PC13A	Pad	-	AS PER PLAN		475	-	T12@150 C/C	T12@150 C/C	--	--	-	-
PC14A	Pad	-	1800	900	475	-	T12@150 C/C	T12@150 C/C	--	--	-	-

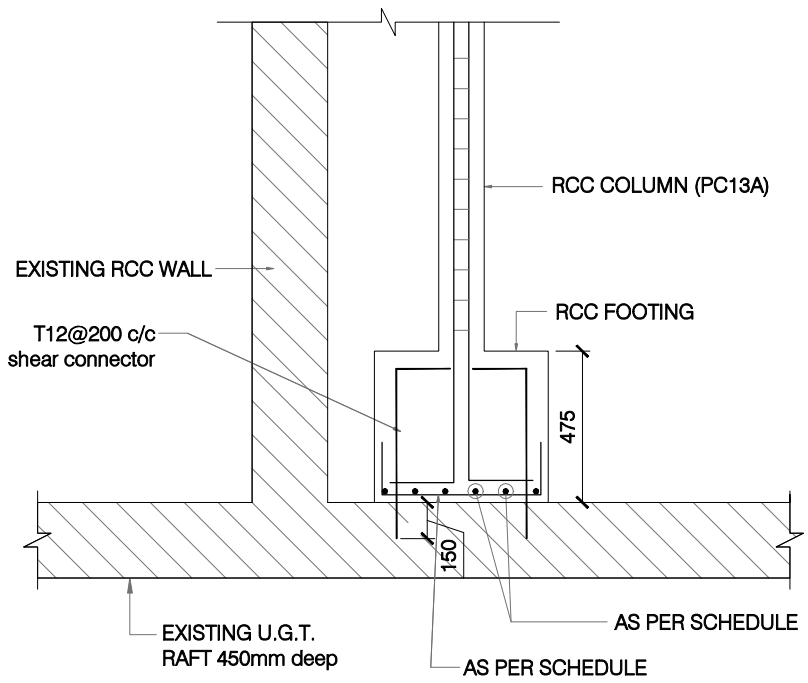

SECTION 1

SCALE 1:50

NOTE-

1. NITOBOND OR EQUIVALENT BONDING AGENT TO BE USED ON EXISTING CONCRETE ROUGH SURFACE BEFORE NEW CONCRETING.
2. BACK PROPPING TO THE SLAB MUST BE DONE
3. REINFORCEMENT SHOULD NOT BE DAMAGED WHILE BREAKING CONCRETE OF EXISTING UGT WALL AND SLAB.
4. MICRO CONCRETE TO BE USED WHILE RE-CONCRETING TO AVOID VOIDS/HONEYCOMBING
5. ANCHORAGE MUST BE DONE WITH HILTI RE500 OR EQUIVALENT

GRADE OF CONCRETE :-	M40
GRADE OF STEEL :-	Fe - 550D (12mm Above) Fe - 500 (8mm & 10mm)
S.B.C. :-	300 T/sq.m.