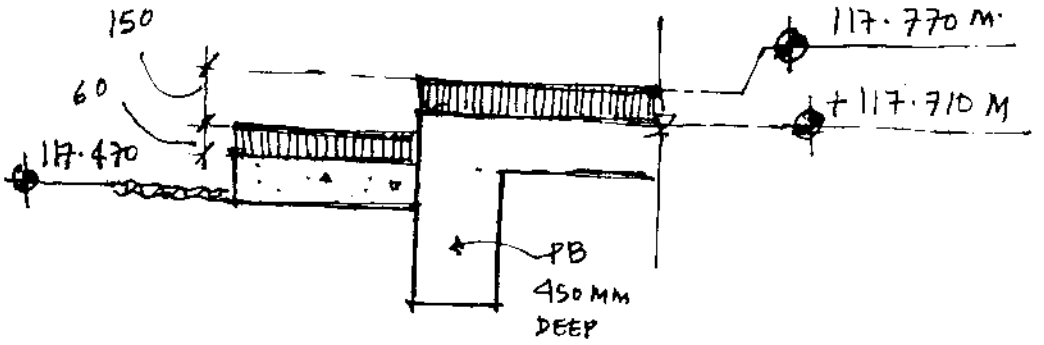
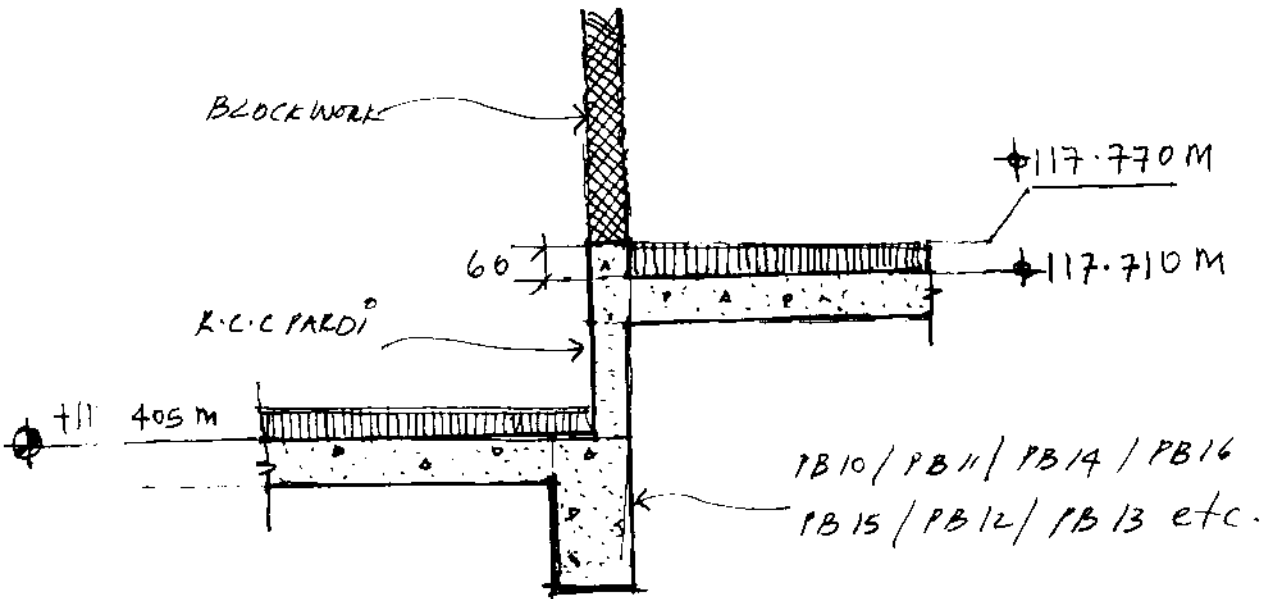
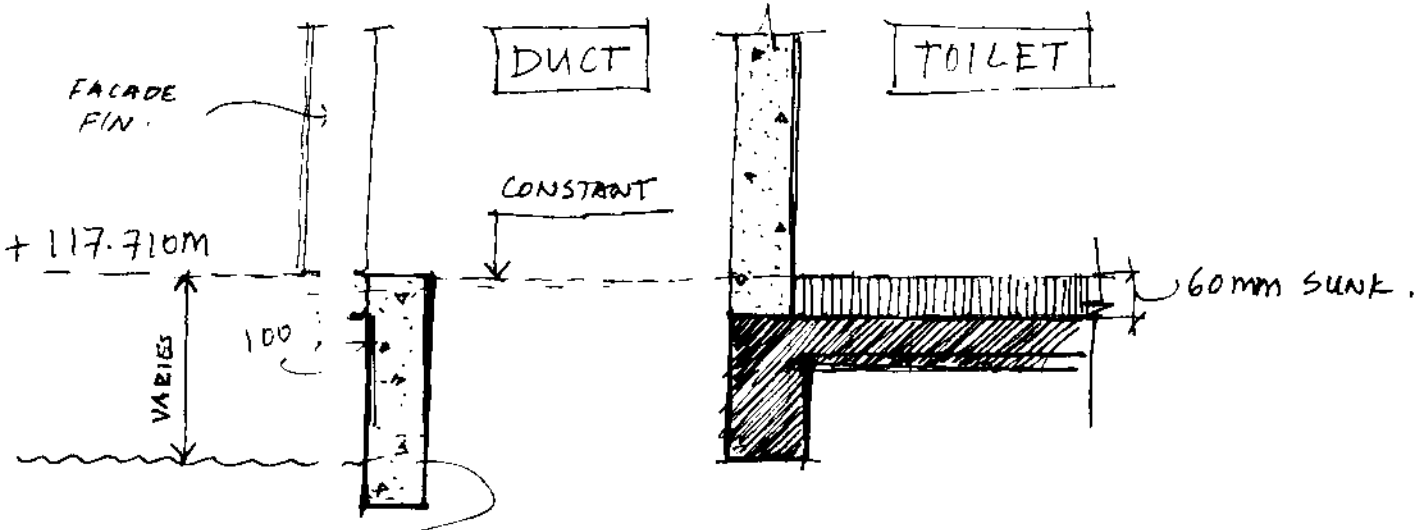


SECTION XX

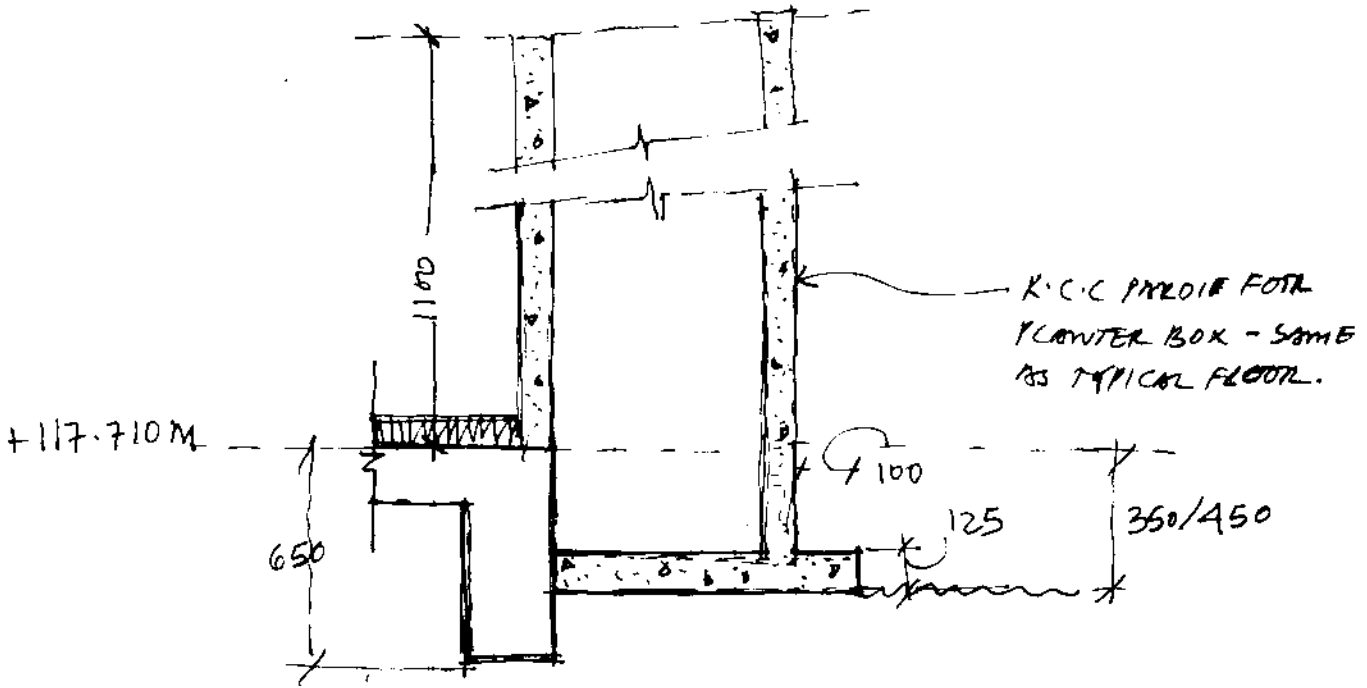

BLOCK WORK
117·770 M
60
117·710 M
R·C·C PARDI°
+11 405 M
PB 10 / PB 11 / PB 14 / PB 16
PB 15 / PB 12 / PB 13 etc.

SECTION VV.



- PLINTH BEAM TOP TO ALWAYS BE IN LEVEL WITH PLINTH LEVEL OF +117.710 MM
- BEAM DEPTH WILL VARY AS PER ADJOINING GROUND LEVEL.

SECTION ZZ


1100
K·C·C PYROLIT FOIL
PLANTER BOX - SAME
AS TYPICAL FLOOR.
+117·710M
100
125
350/450
650

SECTION YY.