hansgrohe



My product catalogue

lodha
thane
options for exposed mixers

AXOR®

Directory

lodha
thane
options for exposed mixers

Product image	Model name	Surfaces	Article Number	Page
	AXOR Uno Single lever bath mixer for exposed installation loop handle	chrome	38421000	3
	AXOR Citterio 3-hole bath mixer for concealed installation with lever handles and plate wall-mounted	chrome	39442000	5
	AXOR Citterio Single lever bath mixer for exposed installation	chrome	39400000	6
	Ecostat Select bath thermostat for exposed installation	chrome	13141000	7
	PuraVida single lever bath mixer for exposed installation	chrome	15472000	9

AXOR Uno
Single lever bath mixer for exposed installation loop handle
Surfaces: **chrome** Article Number: **38421000**



Description

product features

- projection 203 mm
- connection type: s-shaped connections
- centre distance: 150 ± 16 mm
- normal spray
- flow rate: 22 l/min
- ceramic cartridge
- temperature limitation adjustable
- with automatic resetting
- non-return valve
- with silencer
- no integrated shower support
- suitable for continous flow water heaters
- connection dimension: DN15
- scope of supply: metal escutcheon

Technology


Air Power

Quick Clean

Product image




Scale drawing

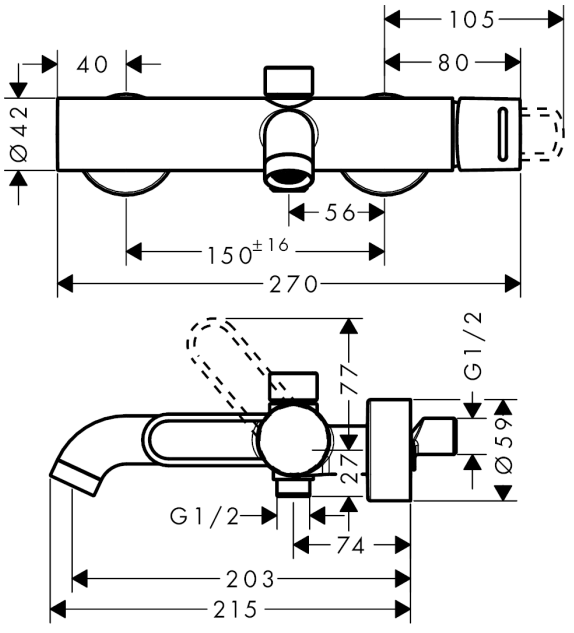

AXOR Uno
Single lever bath mixer for exposed installation loop handle
Surfaces: **chrome** Article Number: **38421000**



Flowchart



① Shower outlet with 1B-resistance
② Tub outlet

AXOR Citterio
3-hole bath mixer for concealed installation with lever handles and plate wall-mounted
Surfaces: **chrome** Article Number: **39442000**



Description

product features

- projection 222 mm
- with plate
- connection type: basic set
- normal spray
- ceramic valves hot/ cold 90°
- temperature limitation not adjustable
- with automatic resetting
- non-return valve
- integrated shower support
- connection dimension: DN15

Technology


Air Power

Quick Clean


Product image



Scale drawing

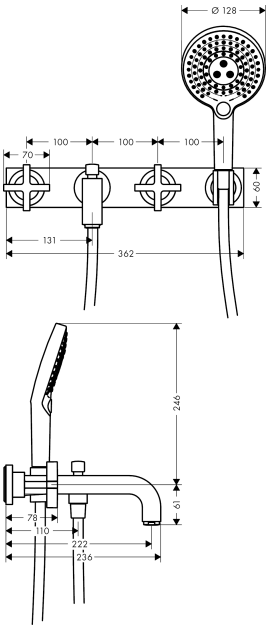

Flowchart



① Shower outlet
② Tub outlet

AXOR Citterio
Single lever bath mixer for exposed installation
Surfaces: **chrome** Article Number: **39400000**



Description

product features

- projection 255 mm
- connection type: G ½
- centre distance: 150 ± 16 mm
- normal spray
- ceramic cartridge
- temperature limitation adjustable
- with automatic resetting
- non-return valve
- with silencer
- no integrated shower support
- suitable for continous flow water heaters
- connection dimension: DN15

Technology


Air Power

Quick Clean


Product image



Scale drawing

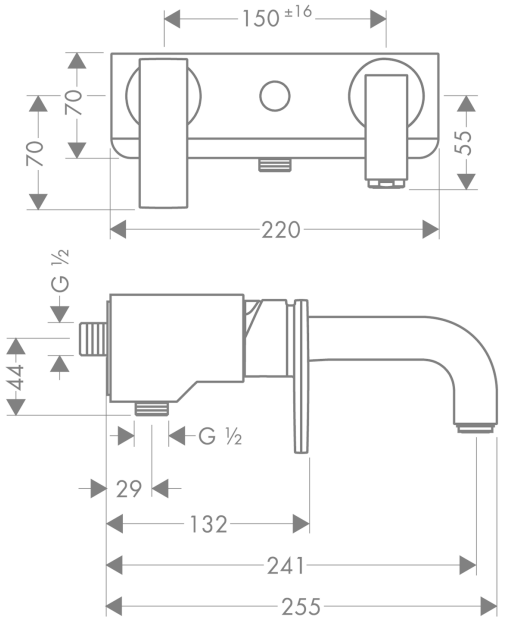

Flowchart

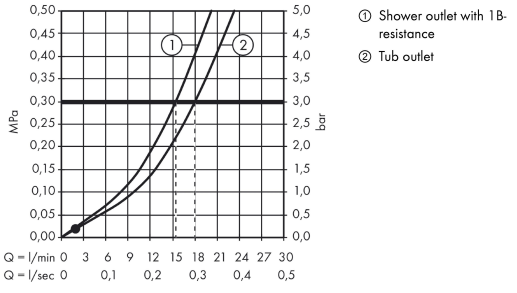

① Shower outlet with 1B-resistance
② Tub outlet

Ecostat Select
bath thermostat for exposed installation
Surfaces: **chrome** Article Number: **13141000**



Description

product features

- projection 144 mm
- 2 outlets
- thermostat cartridge, ceramic valve 180°
- safety lock at 40° C
- temperature limitation adjustable
- flow rate hand shower connection at 0.3 MPa: 12 l/min
- flow rate bath filler (at 0.3 MPa): 20 l/min
- operating pressure: min. 0.1 MPa/max. 1.0 MPa
- shelf made of safety glass
- shelf finish: chrome or white
- with isolated water conduction
- non-return valve
- with silencer
- dirt filter included
- material: handles made out of metal
- centre distance: 150 ± 12 mm
- connection dimension: DN15
- connection type: s-shaped connections
- in case of installation on existing G ½ connections, adaptor no.02026000 must be used


Technology




Product image



Scale drawing

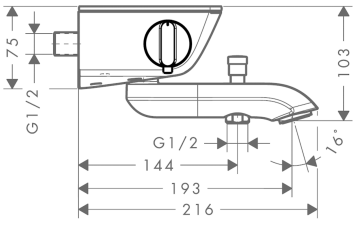


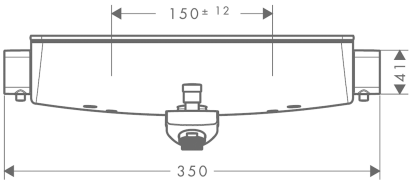

Ecostat Select
bath thermostat for exposed installation
Surfaces: **chrome** Article Number: **13141000**



Flowchart



① Shower outlet with 1B-resistance
② Tub outlet

PuraVida
single lever bath mixer for exposed installation
Surfaces: **chrome** Article Number: **15472000**



Description


product features

- projection 164 mm
- connection type: s-shaped connections
- centre distance: 150 ± 12 mm
- normal spray
- flow rate hand shower connection at 0.3 MPa: 23 l/min
- flow rate bath filler (at 0.3 MPa): 19 l/min
- joystick ceramic cartridge
- temperature limitation not adjustable
- with automatic resetting
- non-return valve
- with silencer
- suitable for continous flow water heaters
- connection dimension: DN15

Product image




Scale drawing

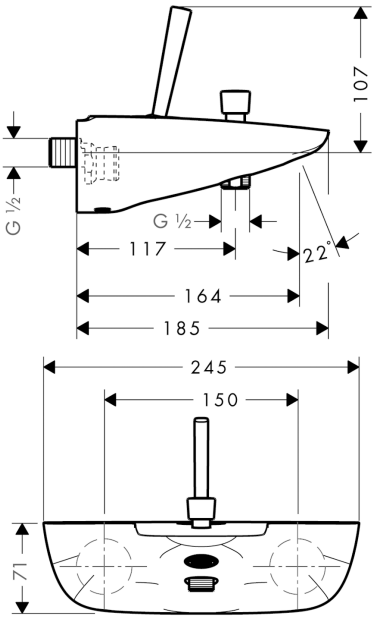

PuraVida
single lever bath mixer for exposed installation
Surfaces: **chrome** Article Number: **15472000**



Flowchart

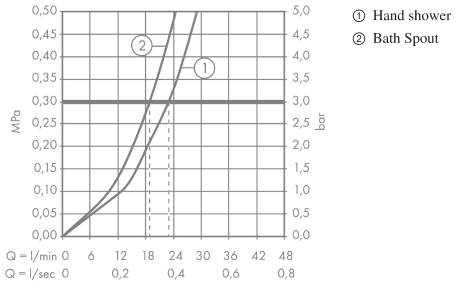

① Hand shower
② Bath Spout