

FLOORING LAYOUT (PROPOSED)

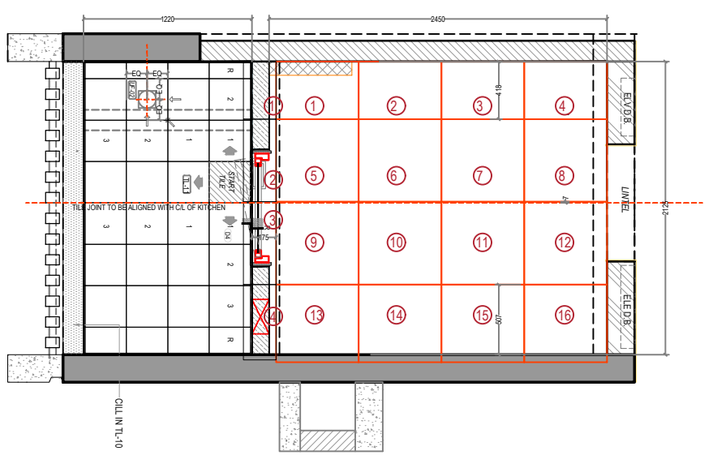

WASTAGE CALCULATIONS KITCHEN FLOOR (600X600)
VITRIFIED ALLOWABLE WASTAGE= 5%

LAID AREA= 5.31 SQM
TOTAL TILES= 16NOS.
TOTAL TILE AREA= 5.76 SQM
DIFFERENCE= 0.45 SQM
WASTAGE PERCENTAGE= 8.47 %

FLOORING LAYOUT (CURRENT AS PER DWG)

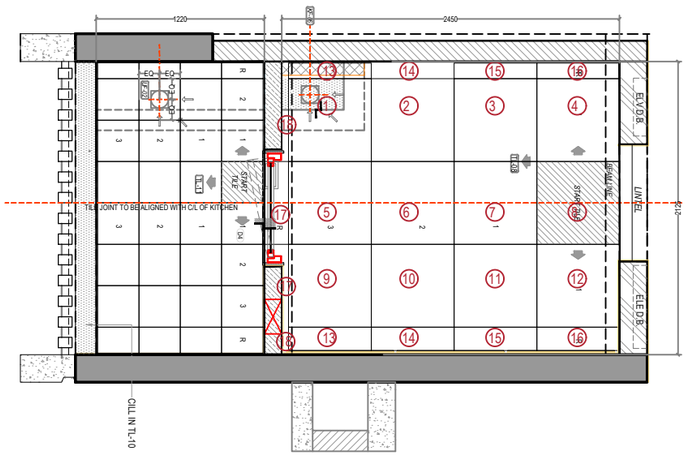

WASTAGE CALCULATIONS KITCHEN FLOOR (600X600)
VITRIFIED ALLOWABLE WASTAGE= 5%

LAID AREA= 5.31 SQM
TOTAL TILES= 18NOS.
TOTAL TILE AREA= 6.48 SQM
DIFFERENCE= 1.17 SQM
WASTAGE PERCENTAGE= 22.03 %