


HYDRAULIC STACKER PARKING SYSTEM SPECIFICATION.

RECOMMENDED CAR SPECIFICATION	LENGTH	4000 MM.	
	WIDTH	1800 MM.WITH OPEN MIRROR.	1st FLOOR.
		1800 MM.WITH OPEN MIRROR.	G.F.
	HEIGHT	1700 MM.	1st FLOOR
		2000 MM.	G.F.
	WEIGHT	Max. 2000 Kg.	
PALLET SIZE	WIDTH	1800 MM. (INNER)	
LIFTING MOTOR	POWER PACK	1.5 KW.	
	SPEED	4 M/Min.	
POWER		AC 415V x 3ø x 50Hz.	
OPERATION		CONTROL WITH SAFETY LOCKING KEY.	
SAFETY		PALLET STOPPER. EMERGENCY STOPPER.	

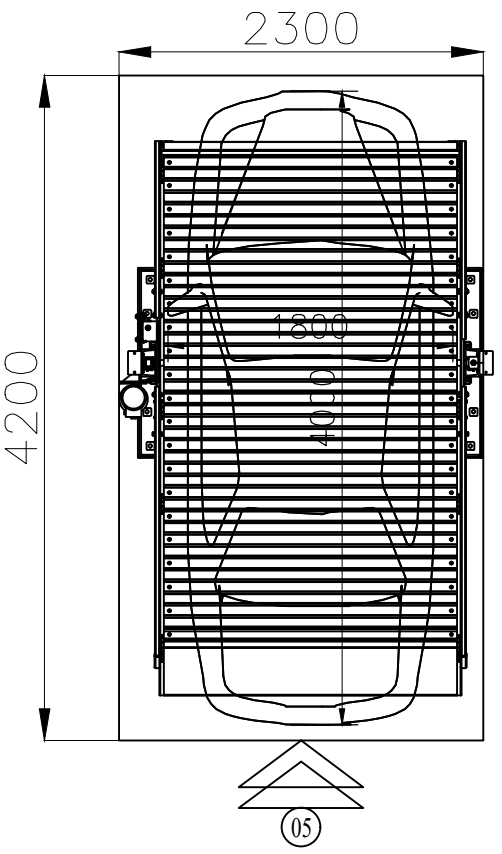

CAR ENTRY / EXIT

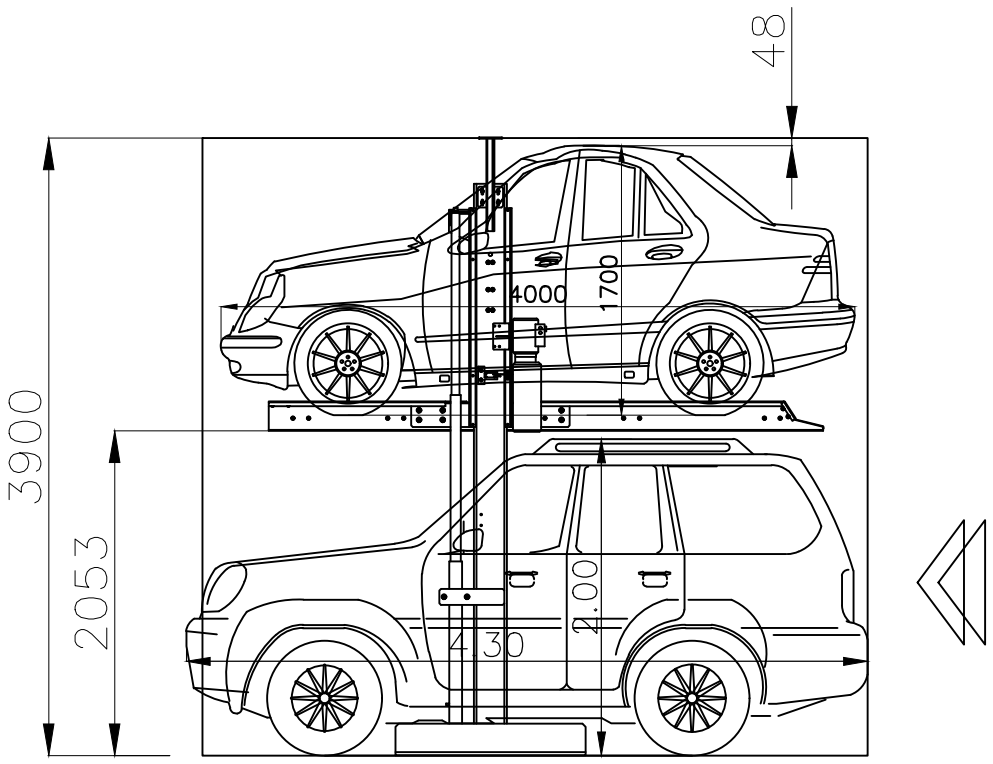

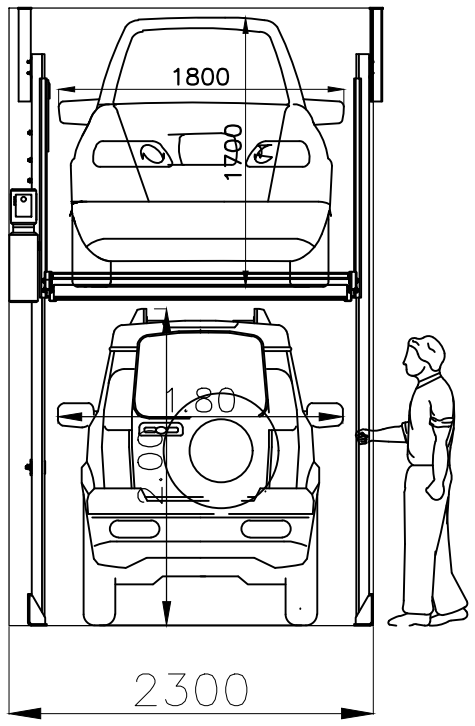

NOTES :-

1) CAR SIZE CONSIDERED WITHOUT ANTENNA/CARRIAGE/ OTHER ACCESSORIES.
2) OVERALL SPACE REQUIRED AS SHOWN.
3) CONTROL PANNEL TO BE COVERED BY CUSTOMER.
4) 6 MTR DRIVEWAY REQUIRE FOR 5 MTR LENGTH CAR.

AFFORDABLE ROBOTIC & AUTOMATION LTD, PUNE.

ARAPL "globalising automation"	TITLE :- SMALL HYD. STACKER G+1 (4.0 M.)					
	CLIENT :- ACME OZONE					
ALL DIM. ARE IN mm.	DRAWN	JM	DATE	18.05.23	LAYOUT NO. :- ----	SCALE --
DO NOT SCALE DRG.	CHECKED	UP			REV. NO. :- 00	SHEET 09 OF 13
IF IN DOUBT ASK.	APPROVED	UP				