


HYDRAULIC STACKER PARKING SYSTEM SPECIFICATION.

RECOMMENDED CAR SPECIFICATION	LENGTH	5000 MM.	
	WIDTH	2000 MM.WITH OPEN MIRROR.	2nd FLOOR.
		2000 MM.WITH OPEN MIRROR.	1st FLOOR.
		2000 MM.WITH OPEN MIRROR.	G.F.
	HEIGHT	1550 MM.	2nd FLOOR
		1550 MM.	1st FLOOR
		2000 MM.	G.F.
	WEIGHT	Max. 2000 Kg.	
PALLET SIZE	WIDTH	2000 MM. (INNER)	
LIFTING MOTOR	POWER PACK	1.5 KW.	
	SPEED	4 M/Min.	
POWER		AC 415V x 3ø x 50Hz.	
OPERATION		CONTROL WITH SAFETY LOCKING KEY.	
SAFETY		PALLET STOPPER. EMERGENCY STOPPER.	

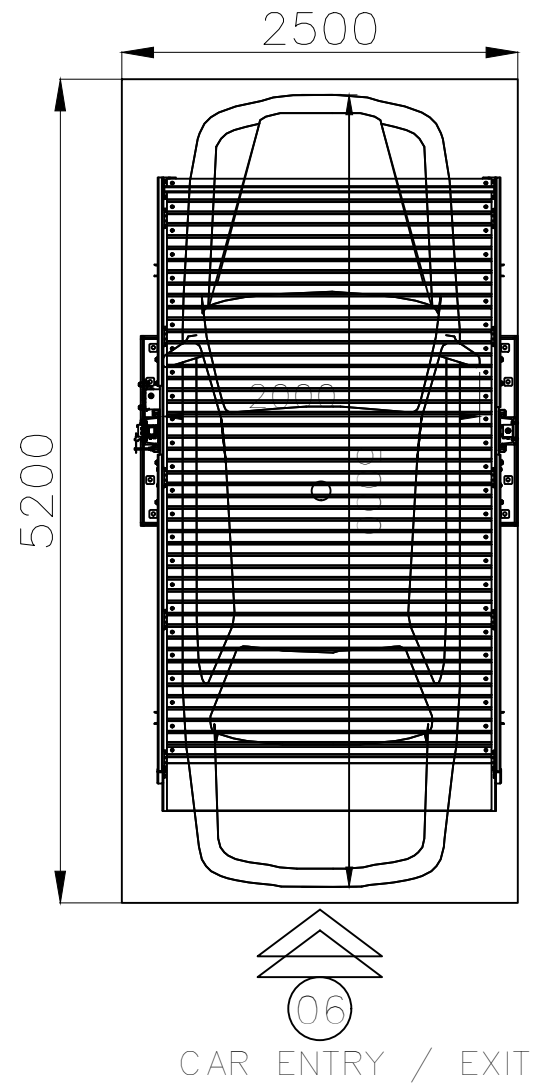

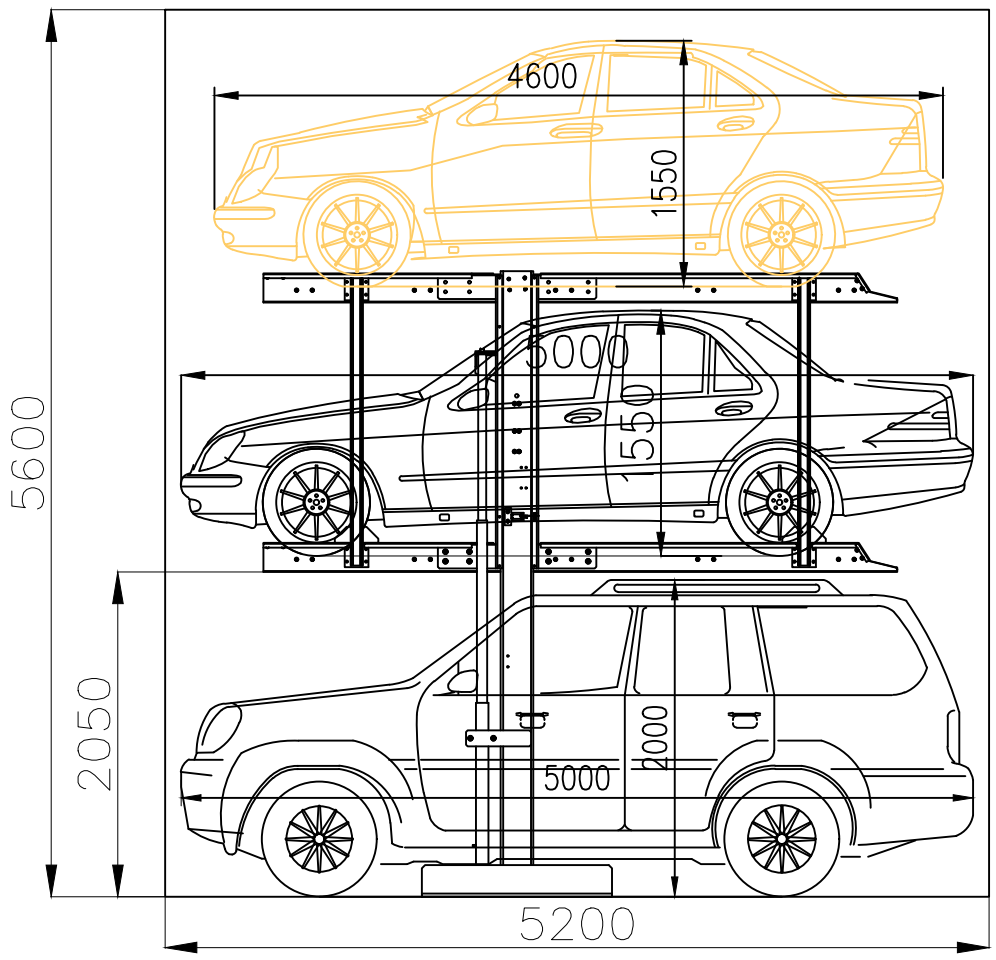

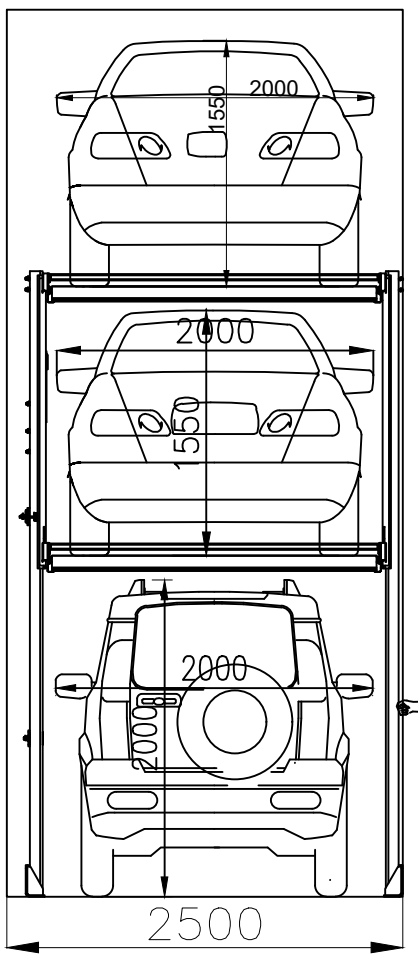

NOTES :-

1) CAR SIZE CONSIDERED WITHOUT ANTENNA/CARRIAGE/ OTHER ACCESSORIES.
2) OVERALL SPACE REQUIRED AS SHOWN.
3) CONTROL PANNEL TO BE COVERED BY CUSTOMER.
4) 6 MTR DRIVEWAY REQUIRE FOR 5 MTR LENGTH CAR.
5) RCC SUPPORT,CHIPPING MAY REQUIRE.
6) MINIMUM 200MM DEPTH RCC (M40 GRADE) REQUIRE FOR FOUNDATION.

AFFORDABLE ROBOTIC & AUTOMATION LTD, PUNE.

ARAPL "globalising automation"	TITLE :- BIG HYD. STACKER G+2 CLIENT :- ACME OZONE					
ALL DIM. ARE IN mm.	DRAWN	JM	DATE	22.05.23	LAYOUT NO. :- ----	SCALE --
DO NOT SCALE DRG.	CHECKED	UP				
IF IN DOUBT ASK.	APPROVED	UP			REV. NO. :- 00	SHEET 10 OF 13