

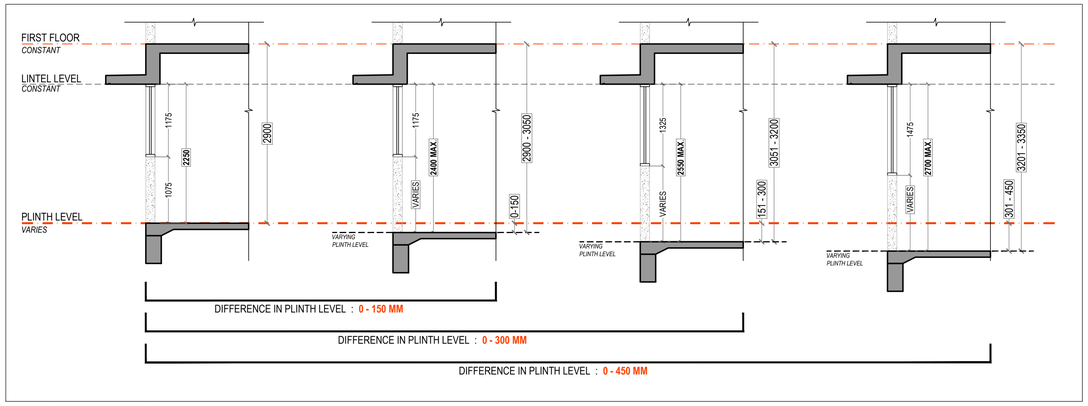



WINDOW DETAILS

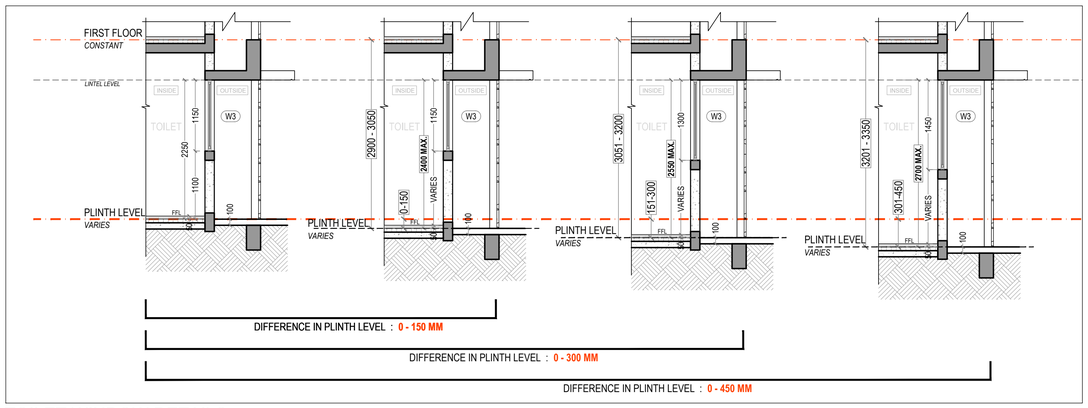


TOILET WINDOW DETAILS

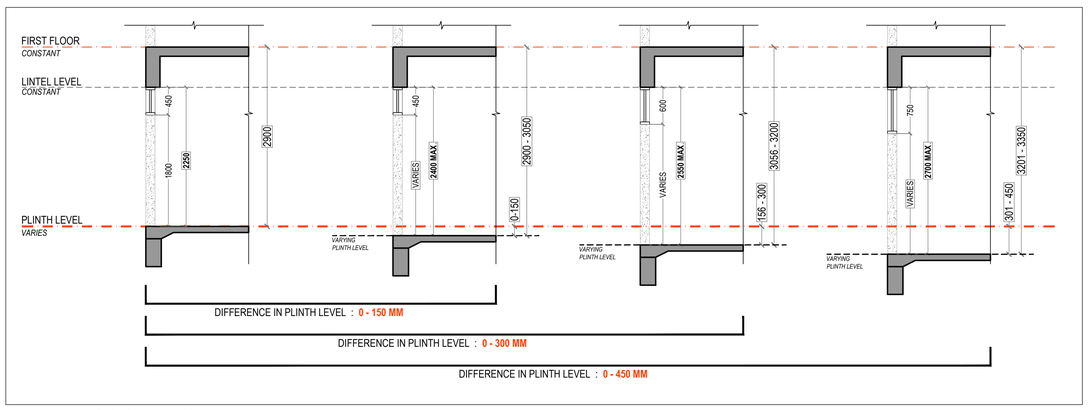

VENTILATOR DETAILS

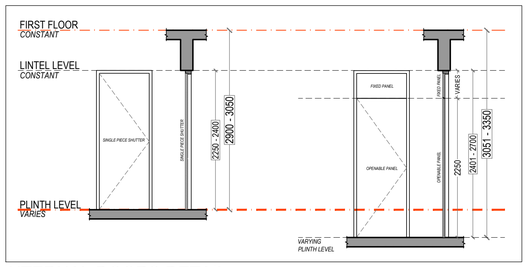


INTERNAL DOORS DETAIL

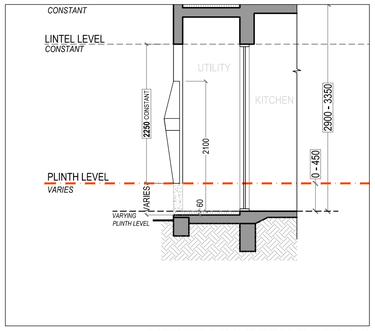


UTILITY SCREEN DETAILS

NOTE:

- BASED ON MAXIMUM ACCEPTABLE RANGE OF VARIATIONS IN PLINTH LEVELS
- BASED ON MAXIMUM A & B TYPE CLUSTER LENGTH WITH 5 & 4 BUILDINGS IN A ROW, RESPECTIVELY.

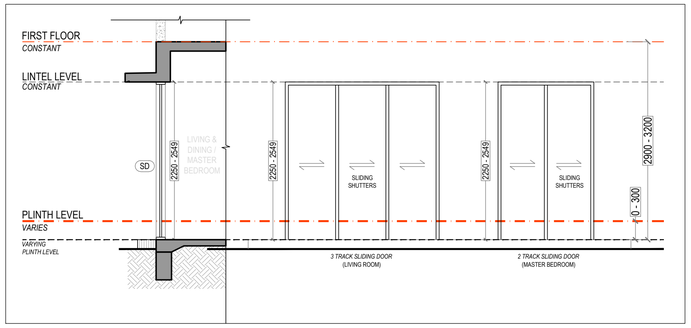

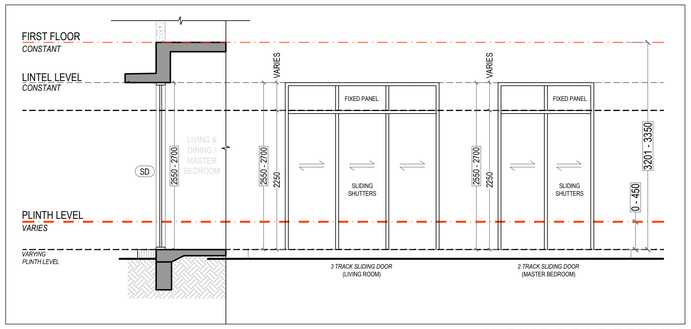

SLIDING DOOR DETAILS

SECTOR 3_TYPE A_NON CONVENTIONAL

CLUSTER CASA PORTO _3.01 A_ NON CONVENTIONAL

	A	B	C	D	E	F	G
PLINTH LEVEL	117.73	117.73	117.6	117.285	117.44	117.705	117.845
FIRST FLOOR LEVEL	120.63	120.63	120.63	120.34	120.34	120.745	120.745
FLOOR TO FLOOR HEIGHT	2.9	2.9	3.03	3.055	2.9	3.04	2.9
DIFFERENCE IN HEIGHT	0.000	0.000	0.130	0.155	0.000	0.140	0.000
WINDOW HEIGHT ON GROUND FLOOR	1.175	1.175	1.175	1.325	1.175	1.175	1.175
SILL AT GROUND FLOOR	1.075	1.075	1.205	1.08	1.075	1.215	1.075
VENTILATOR HEIGHT	0.45	0.45	0.45	0.6	0.45	0.45	0.45
DIFFERENCE	0.000	0.000	0.130	0.155	0.000	0.140	0.000
TOILET WINDOW HEIGHT ON GROUND FLOOR	1.15	1.15	1.15	1.3	1.15	1.15	1.15

CLUSTER CASA PRIMIA_3.04 A_NON CONVENTIONAL

	A	B	C	D
PLINTH LEVEL	117.44	117.285	116.99	117.12
FIRST FLOOR LEVEL	120.34	120.34	120.02	120.02
FLOOR TO FLOOR HEIGHT	2.9	3.055	3.03	2.9
DIFFERENCE IN HEIGHT	0.000	0.155	0.130	0.000
WINDOW HEIGHT ON GROUND FLOOR	1.175	1.325	1.175	1.175
SILL AT GROUND FLOOR	1.075	1.08	1.205	1.075
VENTILATOR HEIGHT	0.45	0.6	0.45	0.45
DIFFERENCE	0.000	0.155	0.130	0.000
TOILET WINDOW HEIGHT ON GROUND FLOOR	1.15	1.3	1.15	1.15

CLUSTER CASA ELITE _3.07 A_NON CONVENTIONAL

	A	B	C	D	E	F	G	H	I	J
PLINTH LEVEL	117.495	117.39	117.285	117.18	117.075	116.75	116.855	116.96	117.065	117.17
FIRST FLOOR LEVEL	120.395	120.395	120.395	120.395	120.395	120.07	120.07	120.07	120.07	120.07
FLOOR TO FLOOR HEIGHT	2.9	3.005	3.11	3.215	3.32	3.32	3.215	3.11	3.005	2.9
DIFFERENCE IN HEIGHT	0.000	0.105	0.210	0.315	0.420	0.420	0.315	0.210	0.105	0.000
WINDOW HEIGHT ON GROUND FLOOR	1.175	1.175	1.325	1.475	1.475	1.475	1.475	1.325	1.175	1.175
SILL AT GROUND FLOOR	1.075	1.18	1.135	1.09	1.195	1.195	1.09	1.135	1.18	1.075
VENTILATOR HEIGHT	0.45	0.45	0.6	0.75	0.75	0.75	0.75	0.6	0.45	0.45
DIFFERENCE	0.000	0.105	0.210	0.315	0.420	0.420	0.315	0.210	0.105	0.000
TOILET WINDOW HEIGHT ON GROUND FLOOR	1.15	1.15	1.3	1.45	1.45	1.45	1.45	1.3	1.15	1.15

CLUSTER CASA ELITE_3.09 A_NON CONVENTIONAL

	K	L	M	N	O	P	Q	R	S	T
PLINTH LEVEL	117.17	117.065	116.96	116.855	116.75	116.435	116.54	116.645	116.75	116.855
FIRST FLOOR LEVEL	120.07	120.07	120.07	120.07	120.07	119.755	119.755	119.755	119.755	119.755
FLOOR TO FLOOR HEIGHT	2.9	3.005	3.11	3.215	3.32	3.32	3.215	3.11	3.005	2.9
DIFFERENCE IN HEIGHT	0.000	0.105	0.210	0.315	0.420	0.420	0.315	0.210	0.105	0.000
WINDOW HEIGHT ON GROUND FLOOR	1.175	1.175	1.325	1.475	1.475	1.475	1.475	1.325	1.175	1.175
SILL AT GROUND FLOOR	1.075	1.18	1.135	1.09	1.195	1.195	1.09	1.135	1.18	1.075
VENTILATOR HEIGHT	0.45	0.45	0.6	0.75	0.75	0.75	0.75	0.6	0.45	0.45
DIFFERENCE	0.000	0.105	0.210	0.315	0.420	0.420	0.315	0.210	0.105	0.000
TOILET WINDOW HEIGHT ON GROUND FLOOR	1.15	1.15	1.3	1.45	1.45	1.45	1.45	1.3	1.15	1.15

NOTE:

- KICKER HEIGHT WITH REFERENCE TO 2900mm F/F SHOULD BE READ AS - DIFFERENCE IN HEIGHT + THE DIFFERENCE BETWEEN PLINTH LEVEL AND PLINTH BEAM.
- WINDOW AND VENTILATOR HEIGHTS TO BE MEASURED AT (-650mm) FROM RESPECTIVE WING FIRST FLOOR SLAB LEVEL.

GENERAL NOTES

1 : All dimensions are in millimeters and levels in meters unless specified otherwise.
2 : Do not scale the drawing; follow written dimensions.
3 : All dimensions are unfinished dimensions unless specified otherwise.
4 : Any discrepancies should be brought to the notice of the Architect prior to execution of job / procuring materials at site.
5 : This drawing is the property of Kapadia Associates and should not be reproduced, copied, handed over to a third party or used for any purpose other than for which it has been issued.
6 : This drawing is to be read in conjunction with all relevant structural & services drawings.

KEY PLAN

REVISION INDEX

REV.NO.	DATE	DESCRIPTION

CONSULTANTS

TCE-TATA CONSULTING ENGINEERS LTD.
Infra Structure Consultants
Tel : 91 22 61148181
email : www.tce.co.in

WSP
Services
Tel : 91 120480 8400
email : www.wspgroup.com

SATISH JAIN & CO.
Structural Consultants
Tel : 91 22 2879 3609
email : satishj@sjcse.com

PBB
Planner /Landscape Architect
Tel : 079 6923054
email : landscapeindia@usg.net

STAMP & SIGN

NORTH

N

PROJECT TITLE

LODHA PALAVA- SECTOR 3
NON-CONVENTIONAL

PROJ.NO

L-6513

DRAWING TITLE

AR-NC-A TYPE-GR FLR FENESTRATION LEVELS

DWG.NO

701

DRAWING STAGE

WORKING DRAWING

REV.NO

R-00

DRAWN	CHECKED	SCALE	DATE
RA	KP	1:50	13-08-2014

KAPADIA ASSOCIATES
architecture • urban design
112-114
Peninsula Centre,Dr. S.S. Rao Road,
Off Ambedkar Road,Parel East,
Mumbai 400012
Tel : 91-22-6660 2838 / 39
Fax : 91-22-6660 2844
E-mail : kapt@kapt.in
Website: www.kapt.in