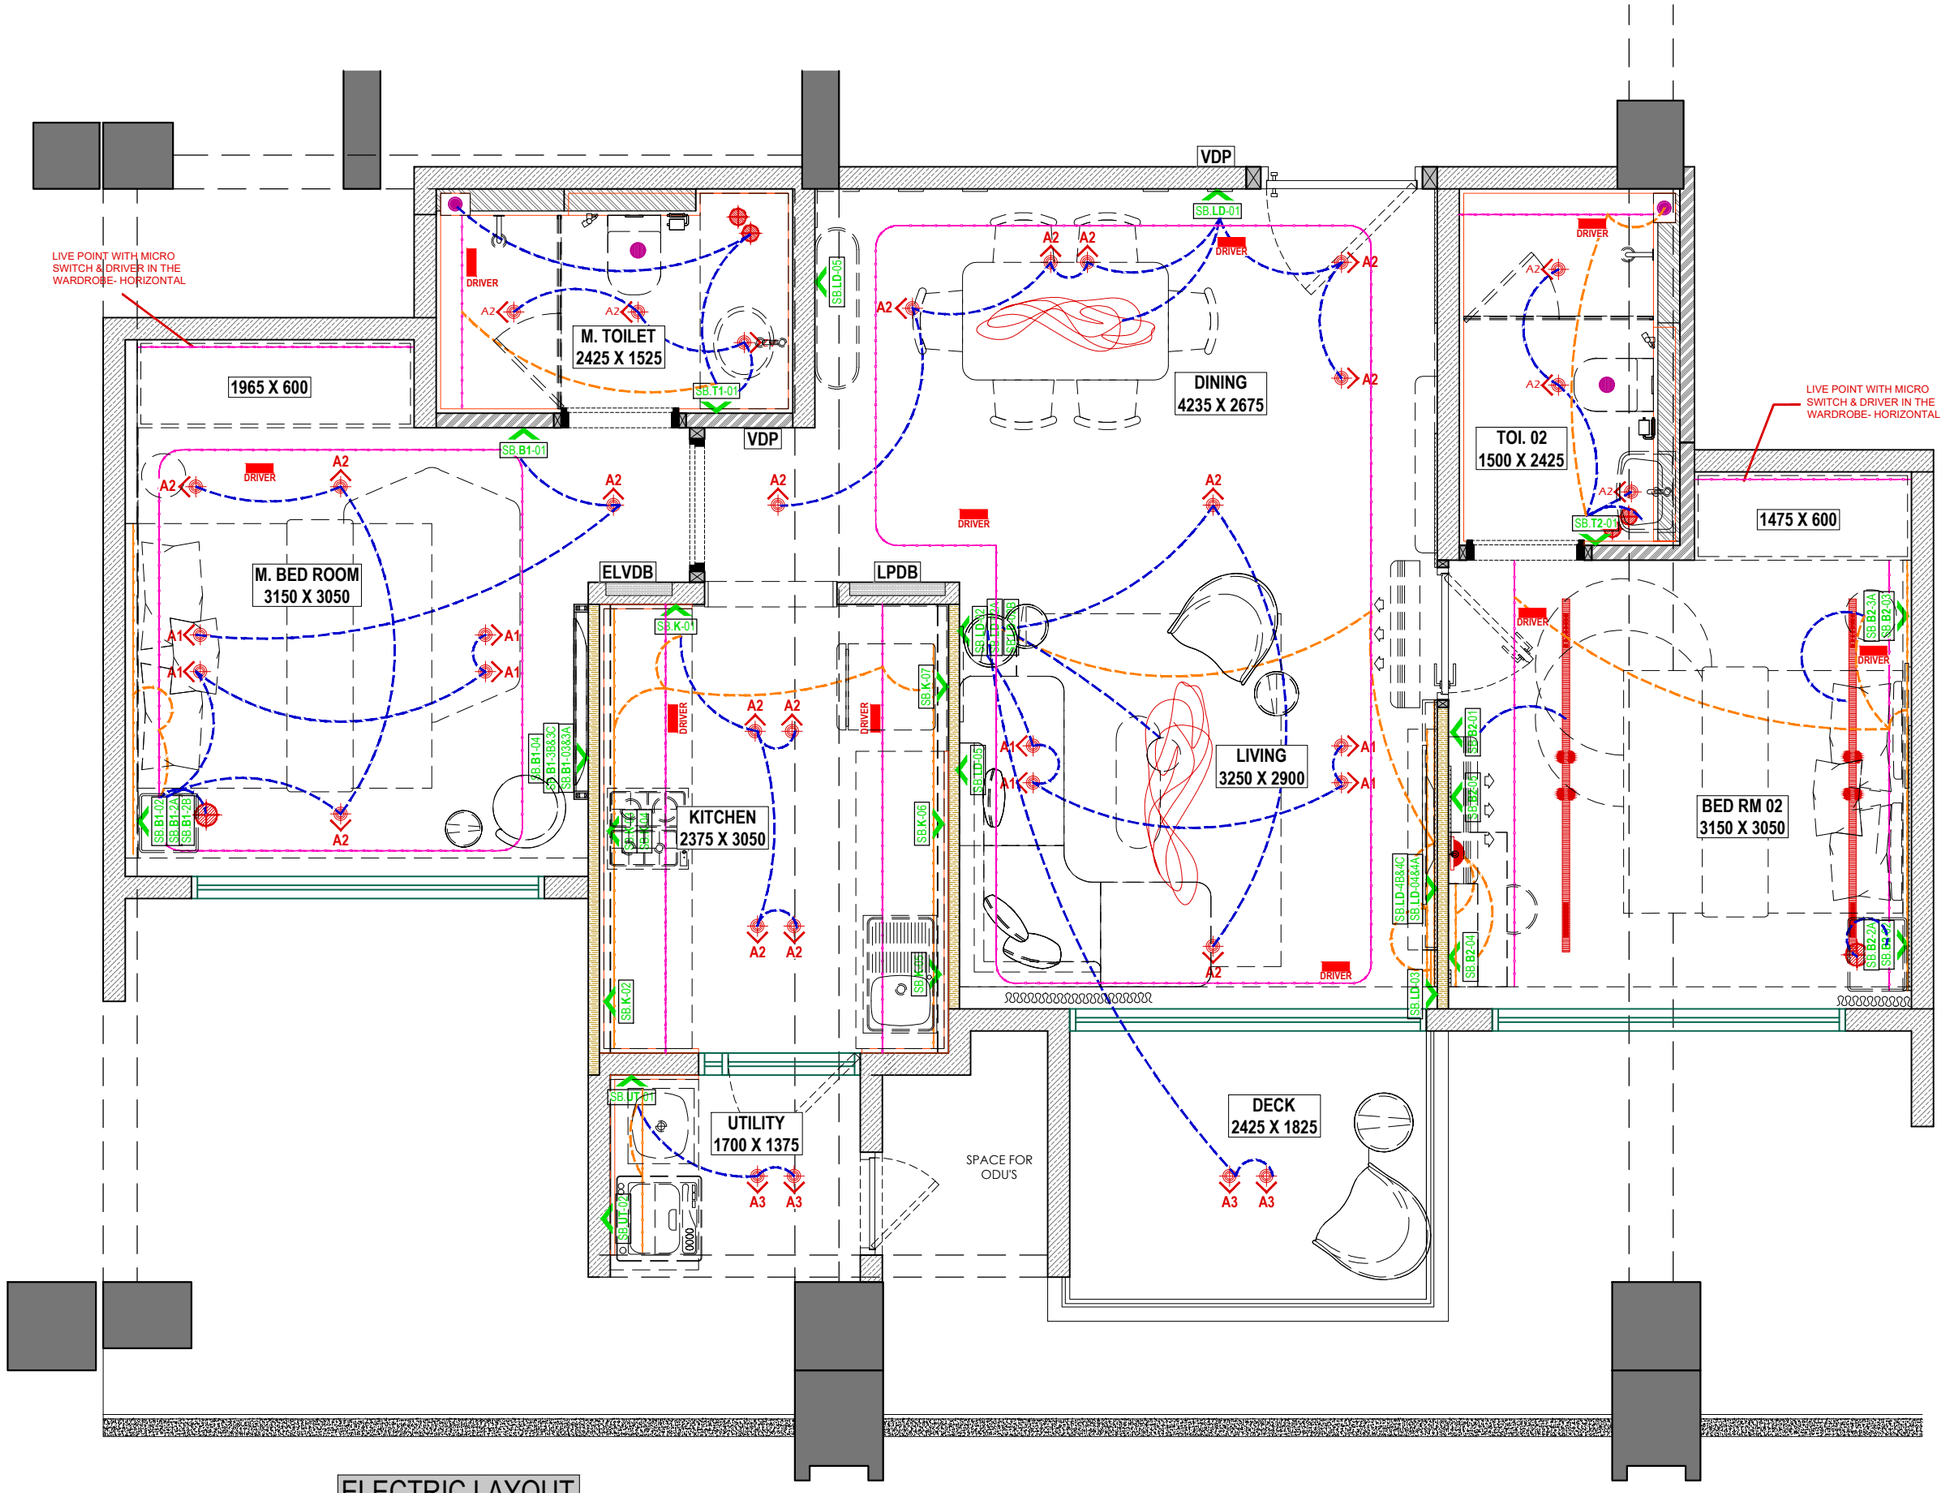


ELECTRIC LAYOUT
SCALE- 1:30

SWITCH BOARD & POWER SCHEDULE:

SB - NO	LOCATION	DETAILS	HT FROM FFL TO BOTTOM OF SB	SWITCH & PLATE DETAILS	MODULE
VDP	OUTSIDE ENTRANCE:	VIDEO DOOR PHONE-OUT	1500MM CENTER		
SB.LD -05	LIVING ROOM ENTRANCE:	1 NO. SWITCH - ENT. DOWN LIGHTS (4NOS) 1 NO. SWITCH - ENT. DOWN LIGHTS (2NOS) 1 NO. SWITCH - PENDENT LIGHT 1 NO. SWITCH FOR A.C	1000MM	MAKE: Anchor Roma PLATE: White SWITCH: White	6 MODULE
SB.LD -02	LIVING ROOM	1 NO. SWITCH - PENDANT LIGHT 1 NO. SWITCH - COVE LIGHT - (T.V UNIT, BELOW DRAWER & T.V UNIT SIDE NICHE SHELF +CEILING COVE 1 NO. SWITCH - DOWNLIGHTS (4NOS) 1 NO. SWITCH - DOWN LIGHTS (2NOS) 1 NO. SWITCH - DECK LIGHT 1 NO. SWITCH FOR A.C	650MM	MAKE: Anchor Roma PLATE: White SWITCH: White	8 MODULE
SB.LD -03A	LIVING ROOM	1 NO. TEL POINT POINT	300MM	MAKE: Anchor Roma	2 MODULE
SB.LD -03B	LIVING ROOM	1 NO. 6/16A SOCKET & SWITCH (GENERAL)	300MM	MAKE: Anchor Roma	3 MODULE
SB.LD -03	LIVING ROOM TV UNIT SIDE WALL:	1 NO. 6/16A SOCKET & SWITCH (Aroma) -LIVE	150MM	MAKE: Anchor Roma PLATE: White SWITCH: White	3 MODULE
SB.LD-04	LIVING ROOM: TV	1 NO. 6A SOCKETS FOR T.V -LIVE	1400MM	MAKE: Anchor Roma	2 MODULE
SB.LD-04 (R)	LIVING ROOM: TV	HDMI CONNECTION FROM SET TOP BOX IR CONNECTION FROM SET TOP BOX CAT 6 LAN CABLE FROM WIFI DEVICE	1400MM	MAKE: Anchor Roma PLATE: White SWITCH: White	3 MODULE
SB.LD-05 STB	LIVING ROOM: SET TOP BOX	2 NO. 6A SOCKETS FOR SET TOP BOX - LIVE	1250MM	MAKE: Anchor Roma PLATE: White SWITCH: White	4 MODULE
SB.LD-05	LIVING ROOM: TV	HDMI CONNECTION FROM TV TO SET TOP BOX 1 CABLE TV POINT	1250MM	MAKE: Anchor Roma	2 MODULE
VDP	TOILET 02 WALL		1250MM S.B BOTTOM	MAKE: Anchor Roma	
SB.LD-06	LIVING ROOM: A.C	POINT FOR AC - LIVE	AS PER ELEVATION		

MASTER BED ROOM						
SB.B1-01	MASTER BED:	ENTRANCE	1 NO. SWITCH - DOWNLIGHTS ABOVE BED & ENTRANCE (2NOS)	1000 MM	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE
SB.B1-02	MASTER BED:	BEDSIDE TABLE 01	1 NO.SWITCH - COVE LIGHT CEILING AND PANELING BED HEAD + PENDANT LIGHT 1 NO. SOCKET 1 NO.SWITCH - DOWNLIGHTS CEILING (1NOS) 1 NO.SWITCH - DOWNLIGHTS CEILING (1NOS) 1 NO. SWITCH - A.C	529MM	MAKE: Anchor Roma PLATE: White SWITCH: White	8 MODULE
SB.B1-02A	MASTER BED:	BEDSIDE TABLE 01	1 NO. TEL POINT	150MM	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE
SB.B1-02B			1 NO. SOCKET (LIVE) FOR AROMA	150MM		3 MODULE
SB.B1-03	MASTER BED:	TV	1 NO. 6A SOCKETS - LIVE	1400MM	MAKE: Anchor Roma	2 MODULE
SB.B1-03A (R)	MASTER BED:	TV	HDMI CONNECTION FROM SET TOP BOX IR CONNECTION FROM SET TOP BOX CAT 6 LAN CABLE FROM WIFI DEVICE	1400MM	MAKE: Anchor Roma PLATE: White SWITCH: White	3 MODULE
SB.B1-04 STB	MASTER BED:	SET TOP BOX	2 NO. 6A SOCKETS FOR SET TOP BOX - LIVE	1250MM	MAKE: Anchor Roma PLATE: White SWITCH: White	4 MODULE
SB.B1-04	MASTER BED:		HDMI CONNECTION FROM TV TO SET TOP BOX 1 CABLE TV POINT	1250MM	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE
SB.B1-05	MASTER BED:	A.C	POINT FOR AC - LIVE	AS PER ELEVATION		
			(ADD LIVE POINT WITH MICRO SWITCH & DRIVER IN THE WARDROBE)			

TOILET 01 (MASTER TOILET)						
SB.T1-01	TOILET 01:	ENTRANCE	1 NO.SWITCH - CEILING LIGHT (2NOS) 1 NO. SWITCH - COVE LIGHT 1 NO. SWITCH - FOR GEYSER 1 NO. SWITCH - PENDANT LIGHT	1000MM S.B BOTTOM	MAKE: Anchor Roma PLATE: White SWITCH: White	4 MODULE

BEDROOM 02						
SB.B2-01	BEDROOM 02:	ENTRANCE	1 NO.SWITCH - TRACK LIGHT	1000MM	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE
SB.B2-02	BEDROOM 02:	BEDSIDE TABLE 01	1 NO. SWITCH - PENDANT LIGHT 1 NO. 6/16A SWITCH & SOCKET 1 NO. SWITCH - A.C	529MM	MAKE: Anchor Roma PLATE: White SWITCH: White	6 MODULE
SB.B2-02A	BEDROOM 02:	BEDSIDE TABLE 01	1 NO. TEL POINT	300MM	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE
SB.B2-03	BEDROOM 02:	BEDSIDE TABLE 02	1 NO.SWITCH FOR TRACK LIGHT 1 NO. 6/16A SWITCH & SOCKET 1 NO. SWITCH - CEILING COVE & BED HEAD COVE	529MM	MAKE: Anchor Roma PLATE: White SWITCH: White	6 MODULE
SB.B2-03A	BEDROOM 02:	BEDSIDE TABLE 02	1 NO. SWITCH FOR AROMA DIFFUSER - LIVE	150MM	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE
SB.B2-04	BEDROOM 02:	ABOVE STUDY TABLE	1 NO. SWITCH FOR WALL LIGHT & SHELVE COVE LIGHT 1 NO. 6/16A SWITCH & SOCKET - GENERAL	850MM	MAKE: Anchor Roma PLATE: White SWITCH: White	6 MODULE
SB.B2-05	BEDROOM 02:	STUDY TABLE WALL	POINT FOR AC - LIVE	AS PER ELEVATION		
			(ADD LIVE POINT WITH MICRO SWITCH & DRIVER IN THE WARDROBE)			

TOILET 02						
SB.T2-01	TOILET 02:	ENTRANCE	1 NO.SWITCH - CEILING LIGHT (2NOS) 1 NO. SWITCH - FOR GEYSER 1 NO. SWITCH - LED COVE & NICHE LIGHT 1 NO. SWITCH - PENDANT LIGHT	1000MM	MAKE: Anchor Roma PLATE: White SWITCH: White	4 MODULE

KITCHEN						
SB.K-01	KITCHEN:	ENTRANCE	1 NO. SWITCH - CEILING LIGHTS (4NOS) 1 NO. SWITCH - FOR COVE LIGHT (CEILING & O.H STORAGE) 1 NO.SWITCH - FOR CHIMNEY 1 NO.SWITCH - FOR HOOD 1 NO.SWITCH - MICROWAVE 1 NO.SWITCH - WATER PURIFIER	1000MM S.B BOTTOM	MAKE: Anchor Roma PLATE: White SWITCH: White	6 MODULE
SB.K-02	KITCHEN:	MICROWAVE	1 NO. 6/16A SOCKETS - MICROWAVE - - LIVE	1375MM CROSS CHECK FROM VENDOR	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE
SB.K-03	KITCHEN:	CHIMNEY	1 NO. 6/16A SOCKETS - CHIMNEY - - LIVE	2300MM CROSS CHECK FROM VENDOR	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE
SB.K-04	KITCHEN:	HOOD	1 NO. 6/16A SOCKET - HOOD - - LIVE	825MM CROSS CHECK FROM VENDOR	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE
SB.K-05	KITCHEN:	WATER PURIFIER	1 NO. 6/16A SOCKETS - WATER PURIFIER - - LIVE	2000MM CROSS CHECK FROM VENDOR	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE
SB.K-06	KITCHEN:	GENERAL	1 NO. 6/16A SOCKETS - GENERAL 1 NO.SWITCH FOR GENERAL 1 NO. SWITCH FOR FRIDGE	1000 MM	MAKE: Anchor Roma PLATE: White SWITCH: White	4 MODULE
SB.K-07	KITCHEN:	FRIDGE	1 NO. 6/16A SOCKETS - FRIDGE - - LIVE	300MM	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE

UTILITY						
SB.UT-01	UTILITY:	ENTRANCE	1 NO. SWITCH - CEILING LIGHTS (2 NOS.) 1 NO. SWITCH - WASHING MACHINE 1 NO.SWITCH - LED BELOW OVERHEAD STORAGE 1 NO. 6/16A SOCKET - GENERAL 1 NO. SWITCH - GENERAL	1100MM	MAKE: Anchor Roma PLATE: White SWITCH: White	6 MODULE
SB.UT-03	UTILITY:	WASHING MACHINE	1 NO. 6/16A SOCKET - WASHING MACHINE	300MM	MAKE: Anchor Roma PLATE: White SWITCH: White	2 MODULE

GENERAL NOTES:

1 : All dimensions are in millimeters and levels in meters unless otherwise specified .

2 : Do not scale the drawing; follow written dimensions.

3 : Any discrepancies should be brought to the notice of the Architect prior to execution of job / procuring materials at site.

4 : This drawing is the property of **LODHA GROUP** and should not be reproduced, copied, handed over to a third party or used for any purpose other than for which it has been issued.

5 : This drawing is to be read in conjunction with all relevant structural & services drawings.

REVISION INDEX:	
REV. NO.:	DATE:

REVISION INDEX:	
REV. NO.:	DATE:

NORTH

PROJECT NAME: ACME OZONE SHOW FLAT

DRAWING STAGE.: VFC DRAWING

DRAWING NO:	REVISION NO:	SCALE:
L-ID-AO-SF-LP_107	R0	1:30
DATE:	DRAWN:	CHECKED:
11-05-2022	AA	VD

DRAWING TITLE: ACME OZONE SHOW FLAT
ACME OZONE SHOW FLAT
ELECTRIC LAYOUT

LODHA
Lodha Excelus
8th floor
N M Joshi Marg
Mahalaxmi
Mumbai 400 011, India
T: +91 22 23034400