

SR. NO (2)
LOCATION- B TYPOLOGY (REFUSE DOOR)
DOOR SIZE:- 1040MM X 2240 MM.
TOTAL QTY-01 NO.

NOTE- FRAME HEIGHT OF 2240 MENTION (INCLUDING SCREED DEPTH.)

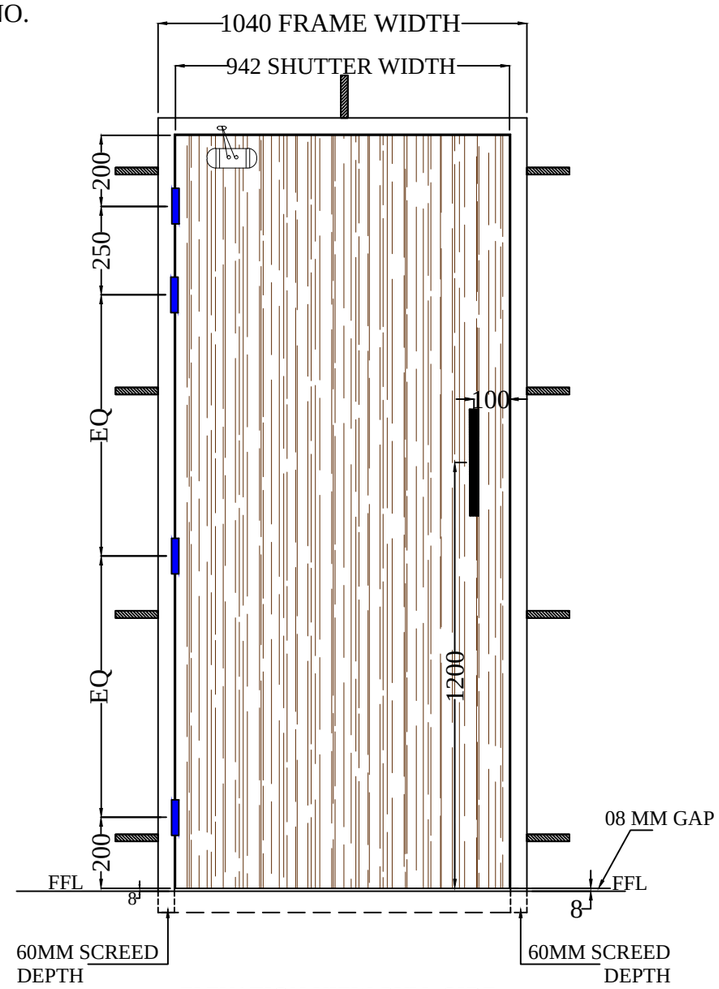


ELEVATION VIEW PULL SIDE

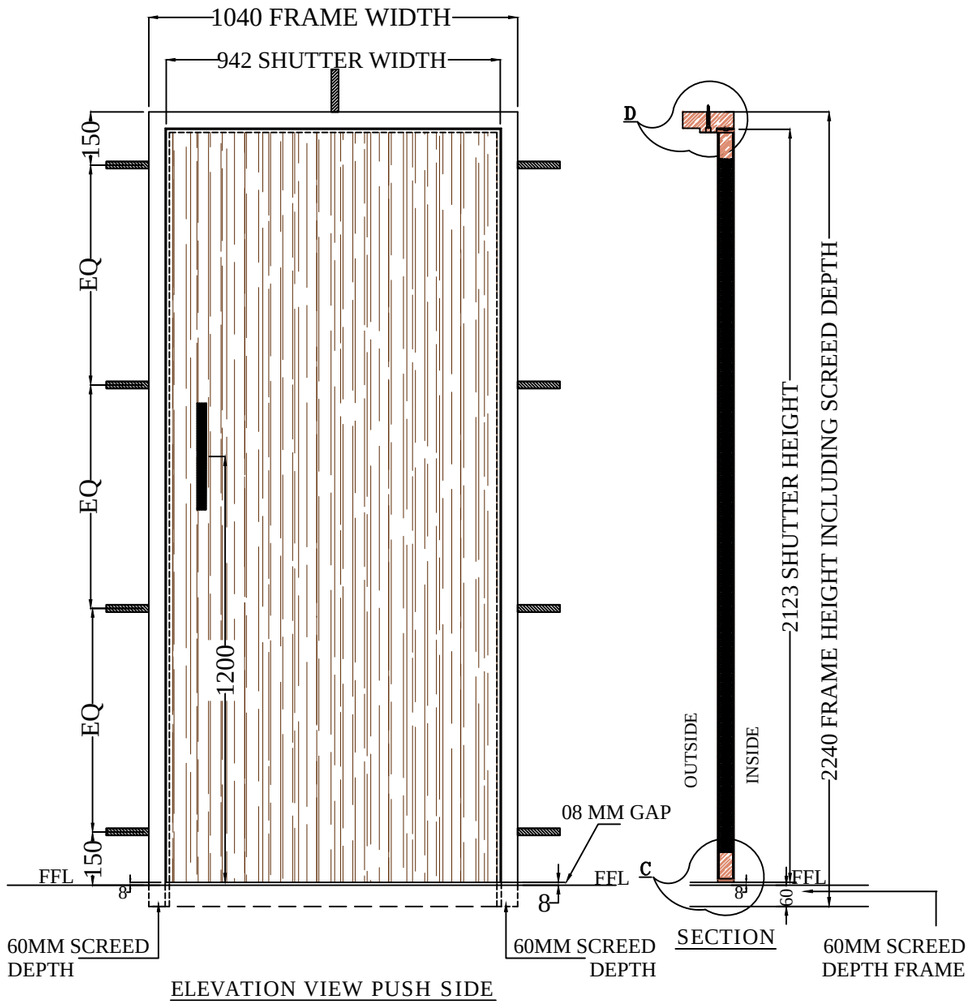


ELEVATION VIEW PUSH SIDE

SECTION

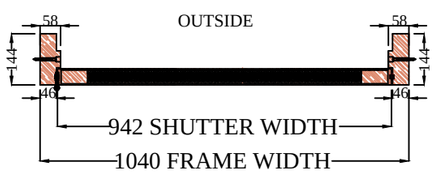

INSIDE


INSIDE OPEN DOOR

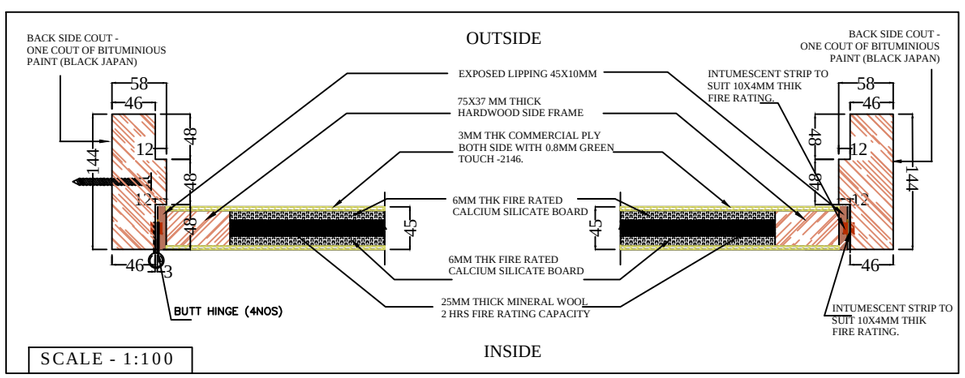

SCALE - 1:100

INSIDE

FRAME SECTION = 144X58
(DOUBLE REBATE)



A	FIRE RATING	120 MIN.
B	FRAME :- RED MIRANTI WOOD (DOUBLE REBATE)	144X 58
C	SHUTTER BOTH SIDE WITH EXPOSED LIPPING OF SIZE 45X10 MM OF BOTH SIDE WITH 0.8MM GREEN TOUCH - 2146.	45 mm THICK
D	CORE INSULATION (A) 2 X 6 mm CALCIUM SILICATE BOARDS (B) 25 mm THICK FIRE RATED INFILL ROCK WOOL INSULATION.	
E	FIRE SEAL FOR FRAME	1 NO- 10 X 4 MM
F	FIRE SEAL FOR SHUTTER	1 NO - 10 X 4 MM
G	WITH DIC TEST REPORT	

GENERAL HARDWARE

1	SS BALL BEARING BUTT HINGES 100X75X3 MM BB 1953W OF BECKER F.S MAKE - 04 NOS PER LEAF .
2	DOOR CLOSER BLC 0604 (01 NO PER DOOR) OF BECKER F.S MAKE.
3	D HANDLE PHD 1930 (300MM LONG X 19MM DIA) OF 01 NO PER DOOR BACK TO BACK OF BECKER F.S MAKE.
4	ANCHOR FASTENERS M10 DIA OF HILTI MAKE.
5	

MANUFACTURER :- NAVAIR INTERNATIONAL LIMITED.
59/17, 2nd FLOOR, GURU RAVIDAS MARG,
KALKAJI EXTN. NEW DELHI - 110019
PH. : 46865000 FAX : 41486275
WEBSITE :- www.navairindia.com
e-mail :- navair@vsnl.com

CLIENT :- LODHA

PROJECT :- LODHA PALAVA II

WOODEN FIRE DOOR 120 MIN

DRAWING NO. :- MAR/17/NAV/02

REVISION :- 03

DATE :- 12/04/2017

DRAWN BY	NILESH W.
CHECKED BY	MANOJ D.
APPROVED	HEMANT P.

NOT TO SCALE