Mandir - Estimate

Stone	Type		Size	Item	Unit	Quantity**	Rate	Value	Total
Makrana Marble	**I**	Garbh Gruh	11'-1"x11'-1"	Main Construction	ft^3	12,500	2,700	3,37,50,000	
		Mandap	24'-7"x24'-7"	Toran	ft	184	8,500	15,64,000	
				Patiya	ft^2	4,500	670	30,15,000	
				Blockwork*	ft^3	5,000	50	2,50,000	
				Door & Pabasan	ft^3	100	3,500	3,50,000	**3,89,29,000**
	II	Garbh Gruh	9'-1"x9'-1"	Main Construction	ft^3	8,400	2,700	2,26,80,000	
		Mandap	22'-7"x22'-7"	Toran	ft	136	8,500	11,56,000	
				Patiya	ft^2	3,500	670	23,45,000	
				Blockwork*	ft^3	4,500	50	2,25,000	
				Door & Pabasan	ft^3	80	3,500	2,80,000	**2,66,86,000**
	III	Garbh Gruh	6'-7"x6'-7"	Main Construction	ft^3	5,200	2,700	1,40,40,000	
		Mandap	15'-7"x15'-7"	Toran	ft	95	8,500	8,07,500	
				Patiya	ft^2	3,000	670	20,10,000	
				Blockwork*	ft^3	3,000	50	1,50,000	
				Door & Pabasan	ft^3	60	3,500	2,10,000	**1,72,17,500**
Bansi Paharpur	**I**	Garbh Gruh	11'-1"x11'-1"	Main Construction	ft^3	12,500	1,700	2,12,50,000	
		Mandap	24'-7"x24'-7"	Toran	ft	184	5,500	10,12,000	
				Patiya	ft^2	4,500	670	30,15,000	
				Blockwork*	ft^3	5,000	50	2,50,000	
				Door & Pabasan	ft^3	100	3,500	3,50,000	**2,58,77,000**
	II	Garbh Gruh	9'-1"x9'-1"	Main Construction	ft^3	8,400	1,700	1,42,80,000	
		Mandap	22'-7"x22'-7"	Toran	ft	136	5,500	7,48,000	
				Patiya	ft^2	3,500	670	23,45,000	
				Blockwork*	ft^3	4,500	50	2,25,000	
				Door & Pabasan	ft^3	80	3,500	2,80,000	**1,78,78,000**
	III	Garbh Gruh	6'-7"x6'-7"	Main Construction	ft^3	5,200	1,700	88,40,000	
		Mandap	15'-7"x15'-7"	Toran	ft	95	5,500	5,22,500	
				Patiya	ft^2	3,000	670	20,10,000	
				Blockwork*	ft^3	3,000	50	1,50,000	
				Door & Pabasan	ft^3	60	3,500	2,10,000	**1,17,32,500**
Jaislmer	**I**	Garbh Gruh	11'-1"x11'-1"	Main Construction	ft^3	12,500	1,500	1,87,50,000	
		Mandap	24'-7"x24'-7"	Toran	ft	184	5,000	9,20,000	
				Patiya	ft^2	4,500	670	30,15,000	
				Blockwork*	ft^3	5,000	50	2,50,000	
				Door & Pabasan	ft^3	100	3,500	3,50,000	**2,32,85,000**
	II	Garbh Gruh	9'-1"x9'-1"	Main Construction	ft^3	8,400	1,500	1,26,00,000	
		Mandap	22'-7"x22'-7"	Toran	ft	136	5,000	6,80,000	
				Patiya	ft^2	3,500	670	23,45,000	
				Blockwork*	ft^3	4,500	50	2,25,000	
				Door & Pabasan	ft^3	80	3,500	2,80,000	**1,61,30,000**
	III	Garbh Gruh	6'-7"x6'-7"	Main Construction	ft^3	5,200	1,500	78,00,000	
		Mandap	15'-7"x15'-7"	Toran	ft	95	5,000	4,75,000	
				Patiya	ft^2	3,000	670	20,10,000	
				Blockwork*	ft^3	3,000	50	1,50,000	
				Door & Pabasan	ft^3	60	3,500	2,10,000	**1,06,45,000**

*Labour Only Item

** Tentative Quantities based on drawing

Scope:

Rough polish in FML order

Fitting of brass items into stone

Necessary cuts, grooves etc as per owner's design in stone for facilities

Speciliazed materials for fixing of stone

Exclusion:

All Brass Fittings

Final Polish

Foundation and civil works upto plinth

Structural and load bearing frame

Inlay Work

Cement, Sand, blocks etc

Annexures

1 Side Elevation

2 Plan - Type I

3 Plan - Type II

4 Plan - Type III

SHREE GANESHJI MANDIR

Annexure I




SIDE ELEVATION

SOMPURA HARILAL HARSHERAM
10, SHIVSHAKTI SOCIETY - NARANPURA
AHMEDABAD - 380 013
TEL. # 27417320 / 27455502

SHREE GANESHJI MANDIR


Annexure II
TYPE I

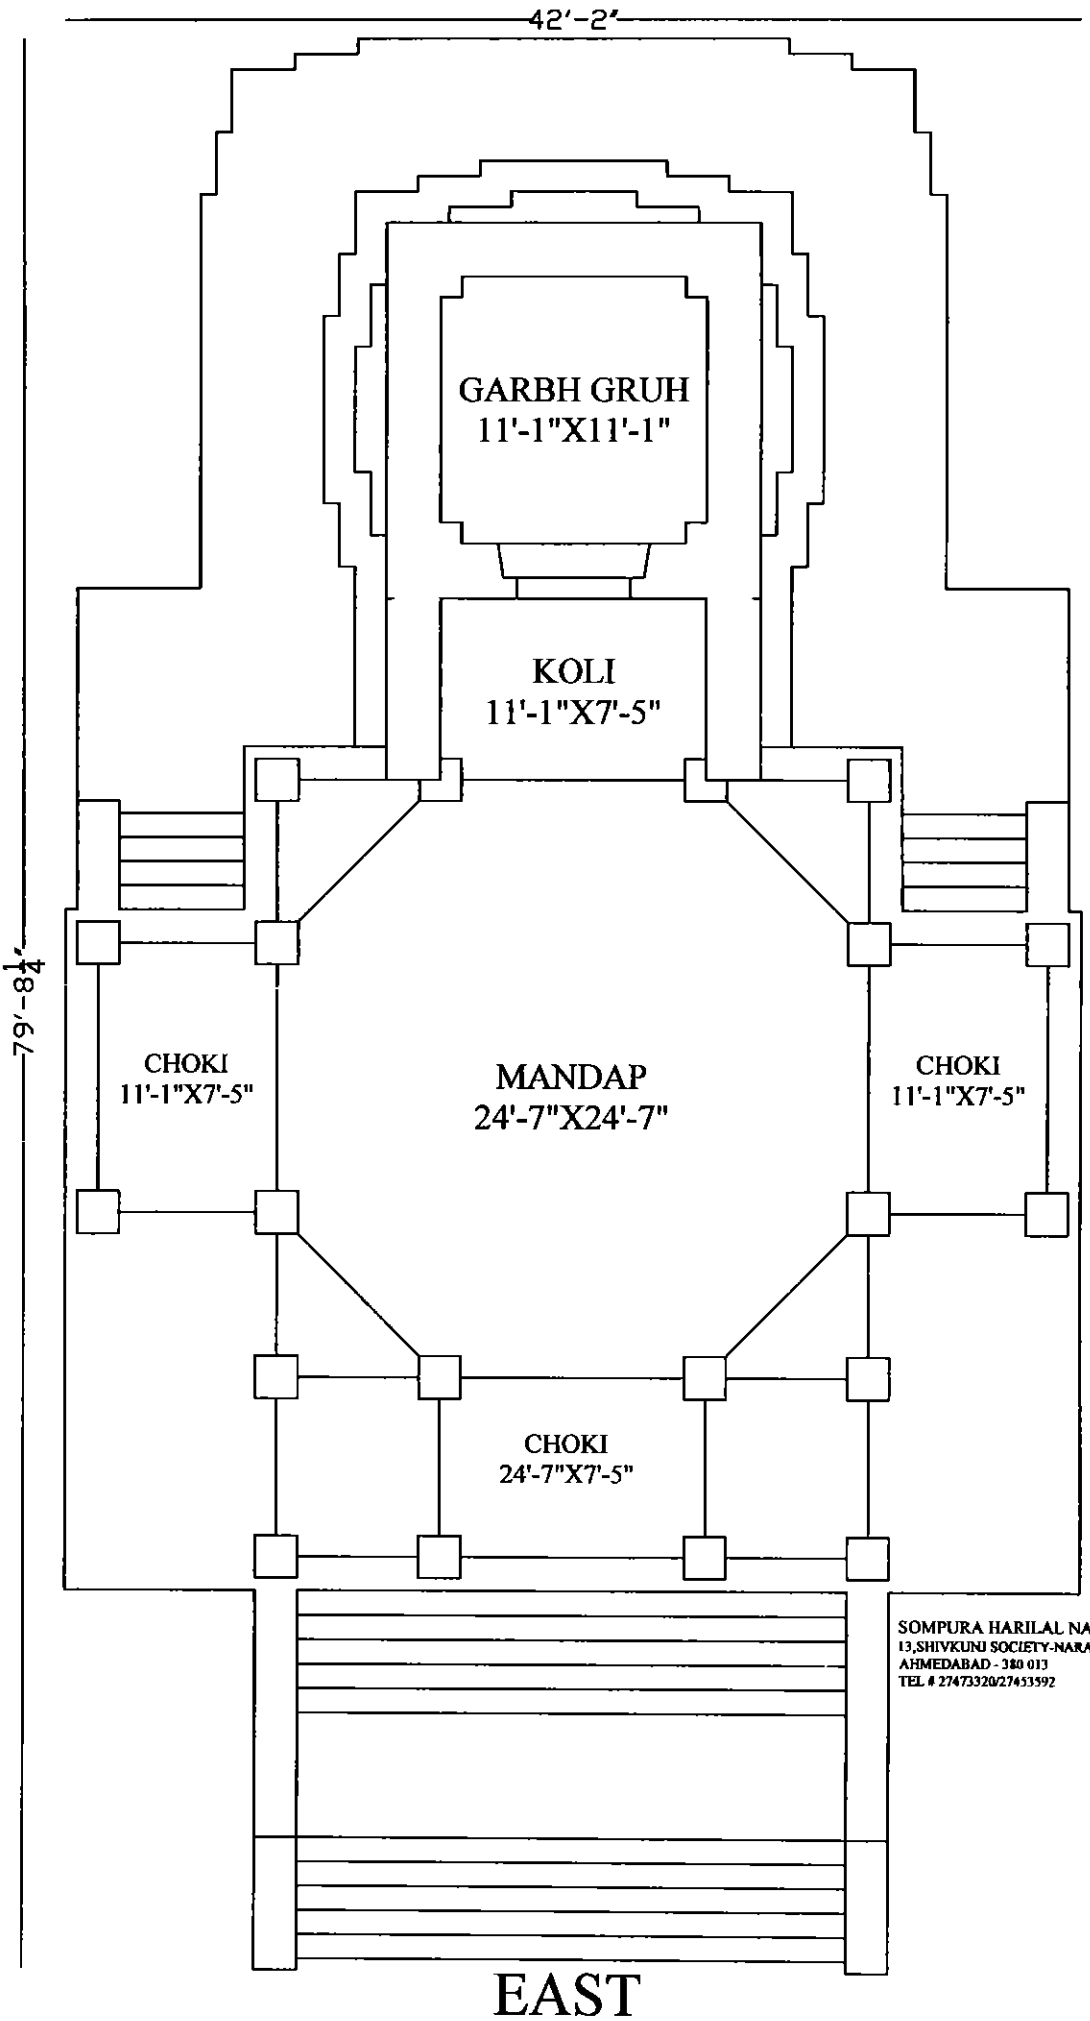

SOMPURA HARILAL NARBHERAM
13,SHIVKUNJ SOCIETY-NARANPURA
AHMEDABAD - 380 013
TEL # 27473320/27453592

EAST

Annexure III
TYPE II

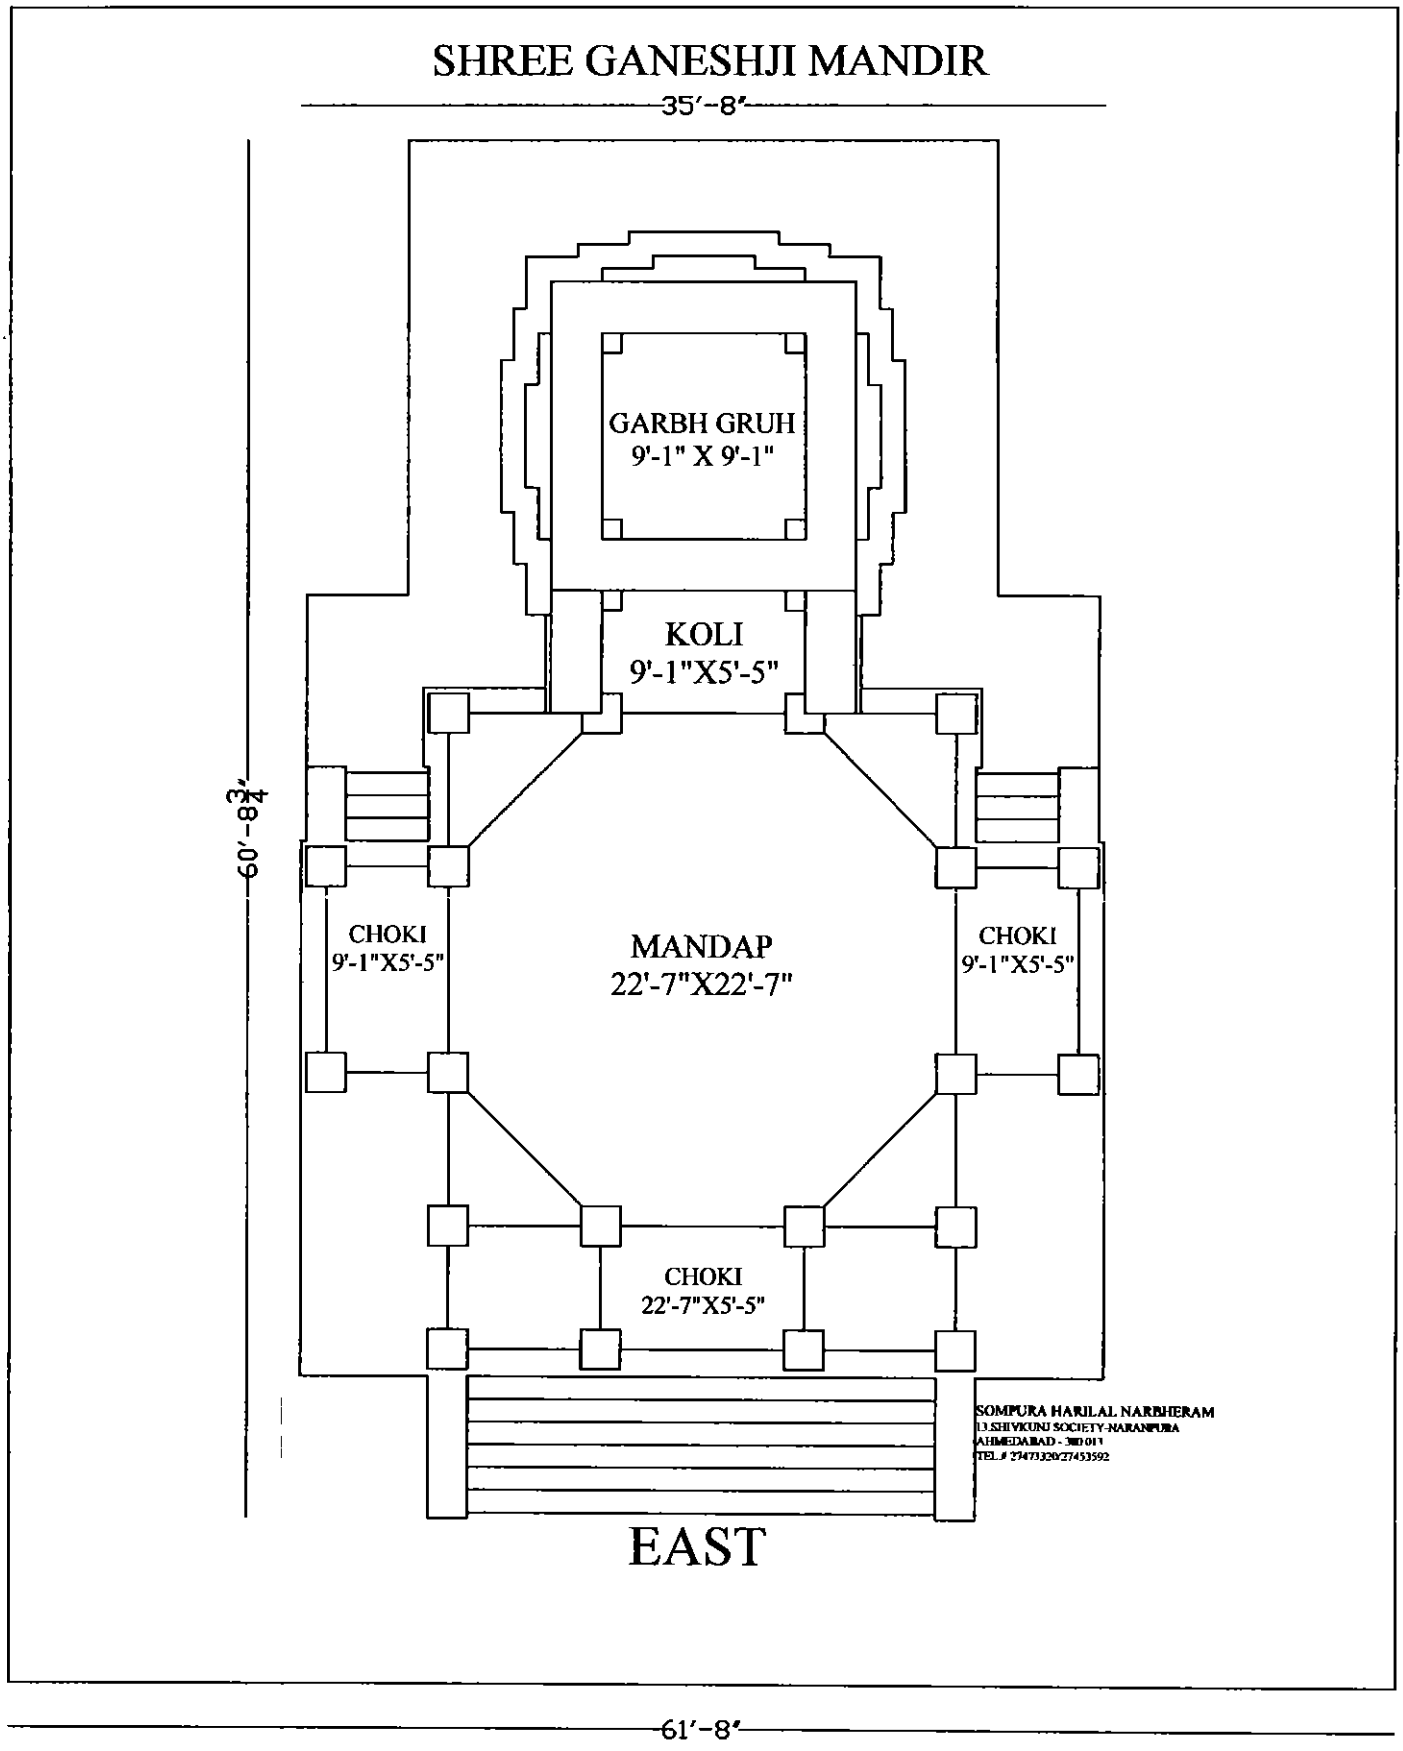

SHREE GANESHJI MANDIR

Annexure IV
TYPE III

