

10/3/17

SR. NO (1)
LOCATION- A TYPOLOGY (REFUSE DOOR)
SIZES:- 1040 MM X 2195 MM.
TOTAL QTY-01 NO.

LAMINATE - A TYPOLOGY → TIMEX MICA 9561SF LOURO PRETO
B TYPOLOGY → GREEN TOUCH 2146

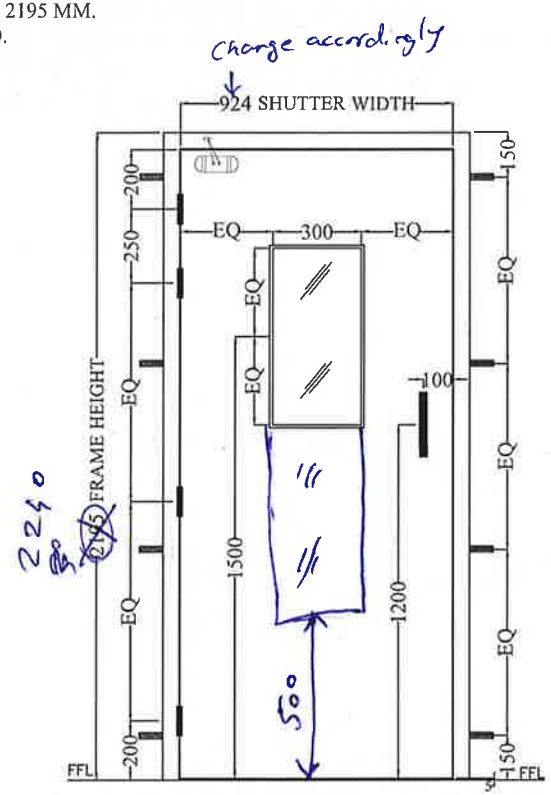


ELEVATION VIEW PULL SIDE

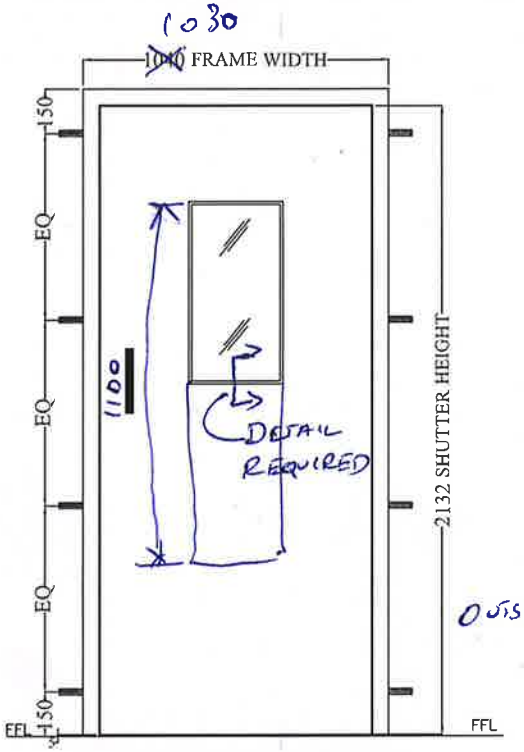


ELEVATION VIEW PUSH SIDE



SECTION

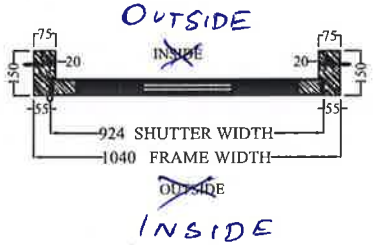

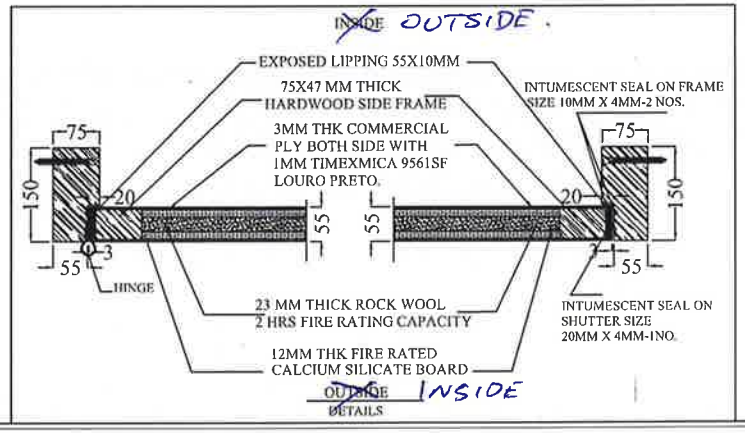

A	FIRE RATING	120 MIN.
B	FRAME :- RED MERANTI WOOD.	150 X 75
C	SHUTTER BOTH SIDE WITH EXPOSED LIPPING OF SIZE 55X10 MM OF BOTH SIDE WITH 1MM LAMINATED TIMEXMICA 9561SF LOURO PRETO.	55 mm THICK
D	CORE INSULATION (A) 2 X 12 mm CALCIUM SILICATE BOARDS (B) 23 mm THICK FIRE RATED INFILL ROCK WOOL INSULATION.	
E	FIRE SEAL FOR FRAME	2NOS- 10 X 4 MM
F	FIRE SEAL FOR SHUTTER	1 NO - 20 X 4 MM
G	WITH CBRI TEST REPORT	

GENERAL HARDWARE

1	SS BALL BEARING BUTT HINGES 100X75X3 MM 3S2BB403030-CE -M OF YALE MAKE - 04 NOS PER LEAF .
2	DOOR CLOSER C7722 (01 NO PER DOOR) OF YALE MAKE.
3	PULL HANDLE YEJI-11B-300 (22MM) OF 01 NO PER DOOR BACK TO BACK OF YALE MAKE.
4	VISION GLASS, SIZE 300MM X 1100MM CLEAR VIEW OF 5MM SGGI MAKE-01 NO.
5	ANCHOR FASTENERS OF HILTI M10 DIA LONG WITH HOLE PLUG & SIM ALLSCREWS.NAILS, ADHESIVE ETC.
6	

MANUFACTURER :- NAVAIR INTERNATIONAL LIMITED.
59 17, 2nd FLOOR, GURU RAVIDAS MARG,
KALKAJI EXTN. NEW DELHI - 110019
PH. : 46865000 FAX : 41486275
WEBSITE :- www.navairindia.com
e-mail :- navair@vsnl.com

CLIENT :- LODHA

PROJECT :- LODHA PALAVA II

WOODEN FIRE DOOR 120 MIN

DRAWING NO. :-	MAR/17/NAV/01
REVISION :-	00
DATE :-	02/03/2017
DRAWN BY	NILESH W.
CHECKED BY	SOUMENDRA N.
APPROVED	HEMANT.


NOT TO SCALE

10/3/17


SR. NO (2)
LOCATION- B TYPOLOGY (REFUSE DOOR)
SIZES:- 1040MM X 2240 MM.
TOTAL QTY-01 NO.

LAMINATE - A TYPOLOGY → TIMEX MICA 9561 SF LOURO PRETO
B TYPOLOGY → GREEN TOUCH 2146


Change accordingly

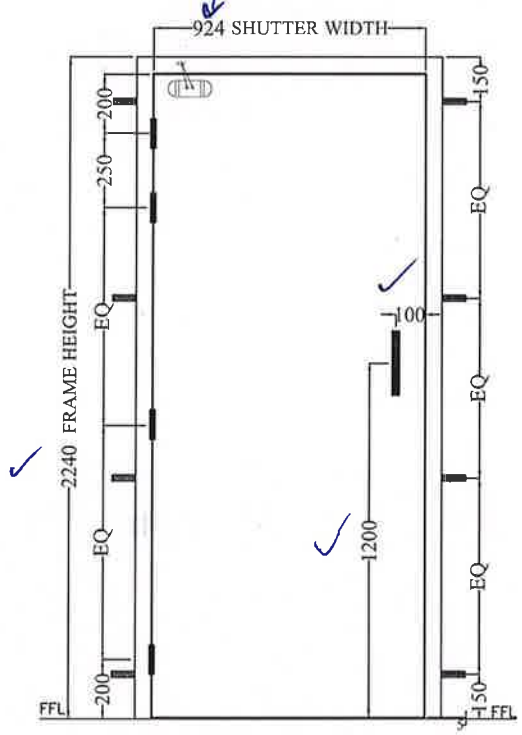

ELEVATION VIEW PULL SIDE

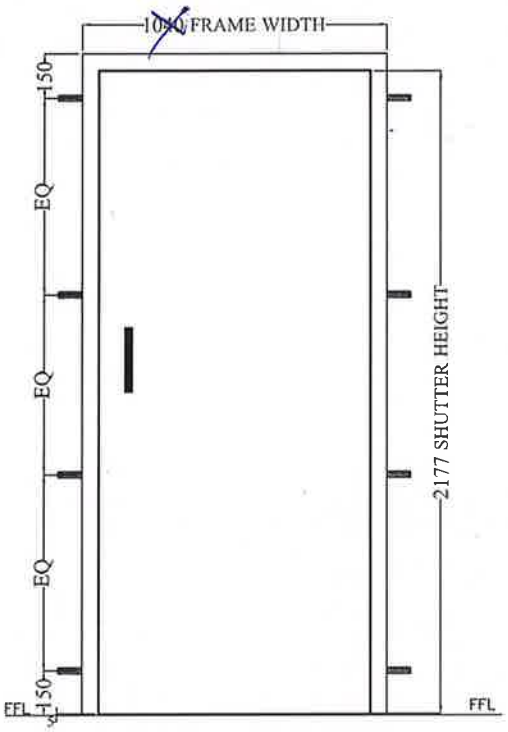


ELEVATION VIEW PUSH SIDE

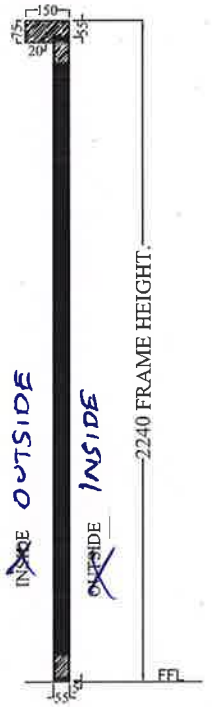

SECTION



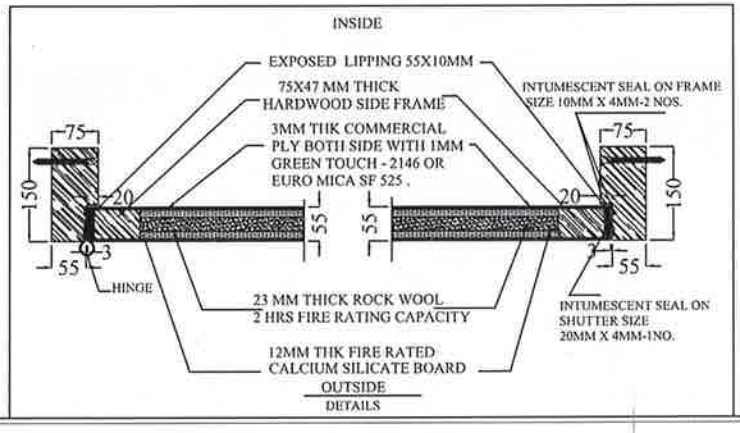

A	FIRE RATING	120 MIN.
B	FRAME :- RED MERANTI WOOD.	150 X 75
C	SHUTTER BOTH SIDE WITH EXPOSED LIPPING OF SIZE 55X10 MM BOTH SIDE WITH 1MM LAMINATED GREEN TOUCH - 2146 OR EURO MICA SF 525 .	55 mm THICK
D	CORE INSULATION (A) 2 X 12 mm CALCIUM SILICATE BOARDS (B) 23 mm THICK FIRE RATED INFILL ROCK WOOL INSULATION.	
E	FIRE SEAL FOR FRAME	2NOS- 10 X 4 MM
F	FIRE SEAL FOR SHUTTER	1 NO - 20 X 4 MM
G	WITH CBRI TEST REPORT	

GENERAL HARDWARE

1	SS BALL BEARING BUTT HINGES 100X75X3 MM 3S2BB403030-CE -M OF YALE MAKE - 04 NOS PER LEAF .
2	DOOR CLOSER C7722 (01 NO PER DOOR) OF YALE MAKE.
3	PULL HANDLE YEH-11B-300 (22MM) OF 01 NO PER DOOR BACK TO BACK OF YALE MAKE.
4	VISION GLASS, SIZE 300MM X 600MM CLEAR VIEW OF 5MM SGGI MAKE-01 NO.
5	ANCHOR FASTENERS OF HILTI M10 DIA LONG WITH HOLE PLUG & SIM ALLSCREWS,NAILS, ADHESIVE ETC.
6	

MANUFACTURER :- NAVAIR INTERNATIONAL LIMITED.
59/17, 2nd FLOOR, GURU RAVIDAS MARG,
KALKAJI EXTN, NEW DELHI - 110019
PH. : 46865000 FAX : 41486275
WEBSITE :- www.navairindia.com
e-mail :- navair@vsnl.com

CLIENT :-	LODHA
PROJECT :-	LODHA PALAVA II
WOODEN FIRE DOOR 120 MIN	
DRAWING NO. :-	MAR/17/NAV/02
REVISION :-	00
DATE :-	02/03/2017
DRAWN BY	NILESH W.
CHECKED BY	SOUMENDRA N.
APPROVED	HEMANT.

NOT TO SCALE